


JZ 1:1 Prototype Mesh

Model to Matter

JZ 1:1 Prototype Mesh | structure + evidence

京张 1:1 原型网 | 总体结构与证据关系

JZ 1:1 / PROTOTYPE MESH

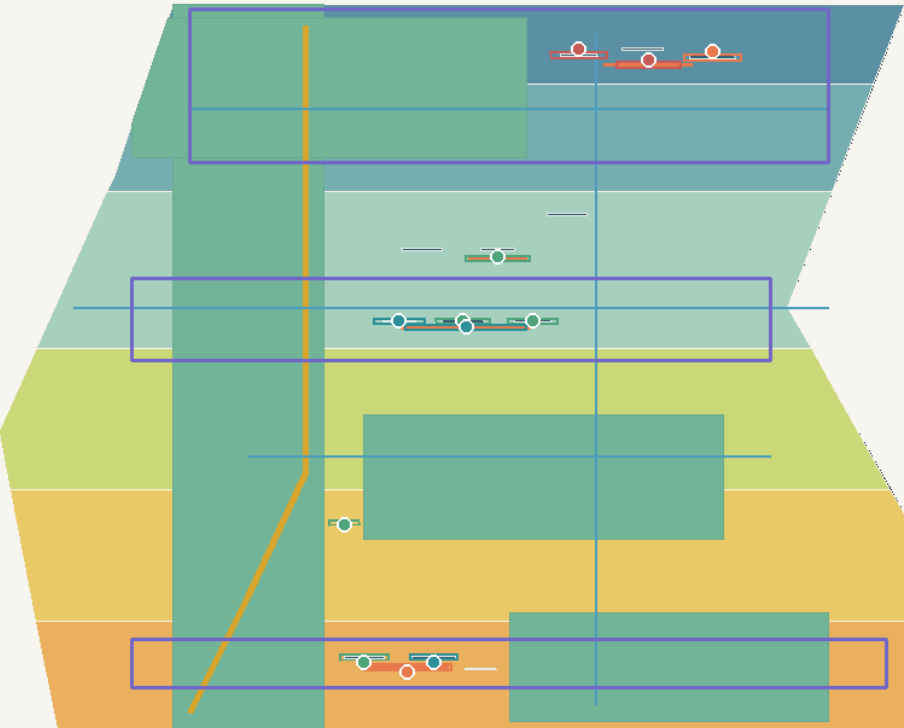

Conceptual recommendation · provisional geometry · derived from GeoJSON + metrics

MODEL → MATTER

model card → 1:1 prototype

use → repair → reuse

100 Y

public ground

memory + daily use

30 Y

public frame

shade + access + drainage

3 Y

service room

adaptable first floor

90 D

removable kit

trial + repair + reuse

MAKE

Zhongzhlyuan

N3 controlled test

TRANSLATE

AI Origin

N0/N1

USE

Dazhongsi

N2 public trial

site 11,412,825.386 sqm · 12 nodes · 12 paired zones

v1.3

ONE-TO-ONE PROPOSITION

Turn AI outputs into one-to-one streets, furniture, service interfaces, and removable components. MAKE, TRANSLATE, USE, repair, and reuse form a distributed urban prototype mesh.

100 Y

Public ground

30 Y

Public frame


3 Y

Service room

90 D

Removable kit

A mesh, not a corridor

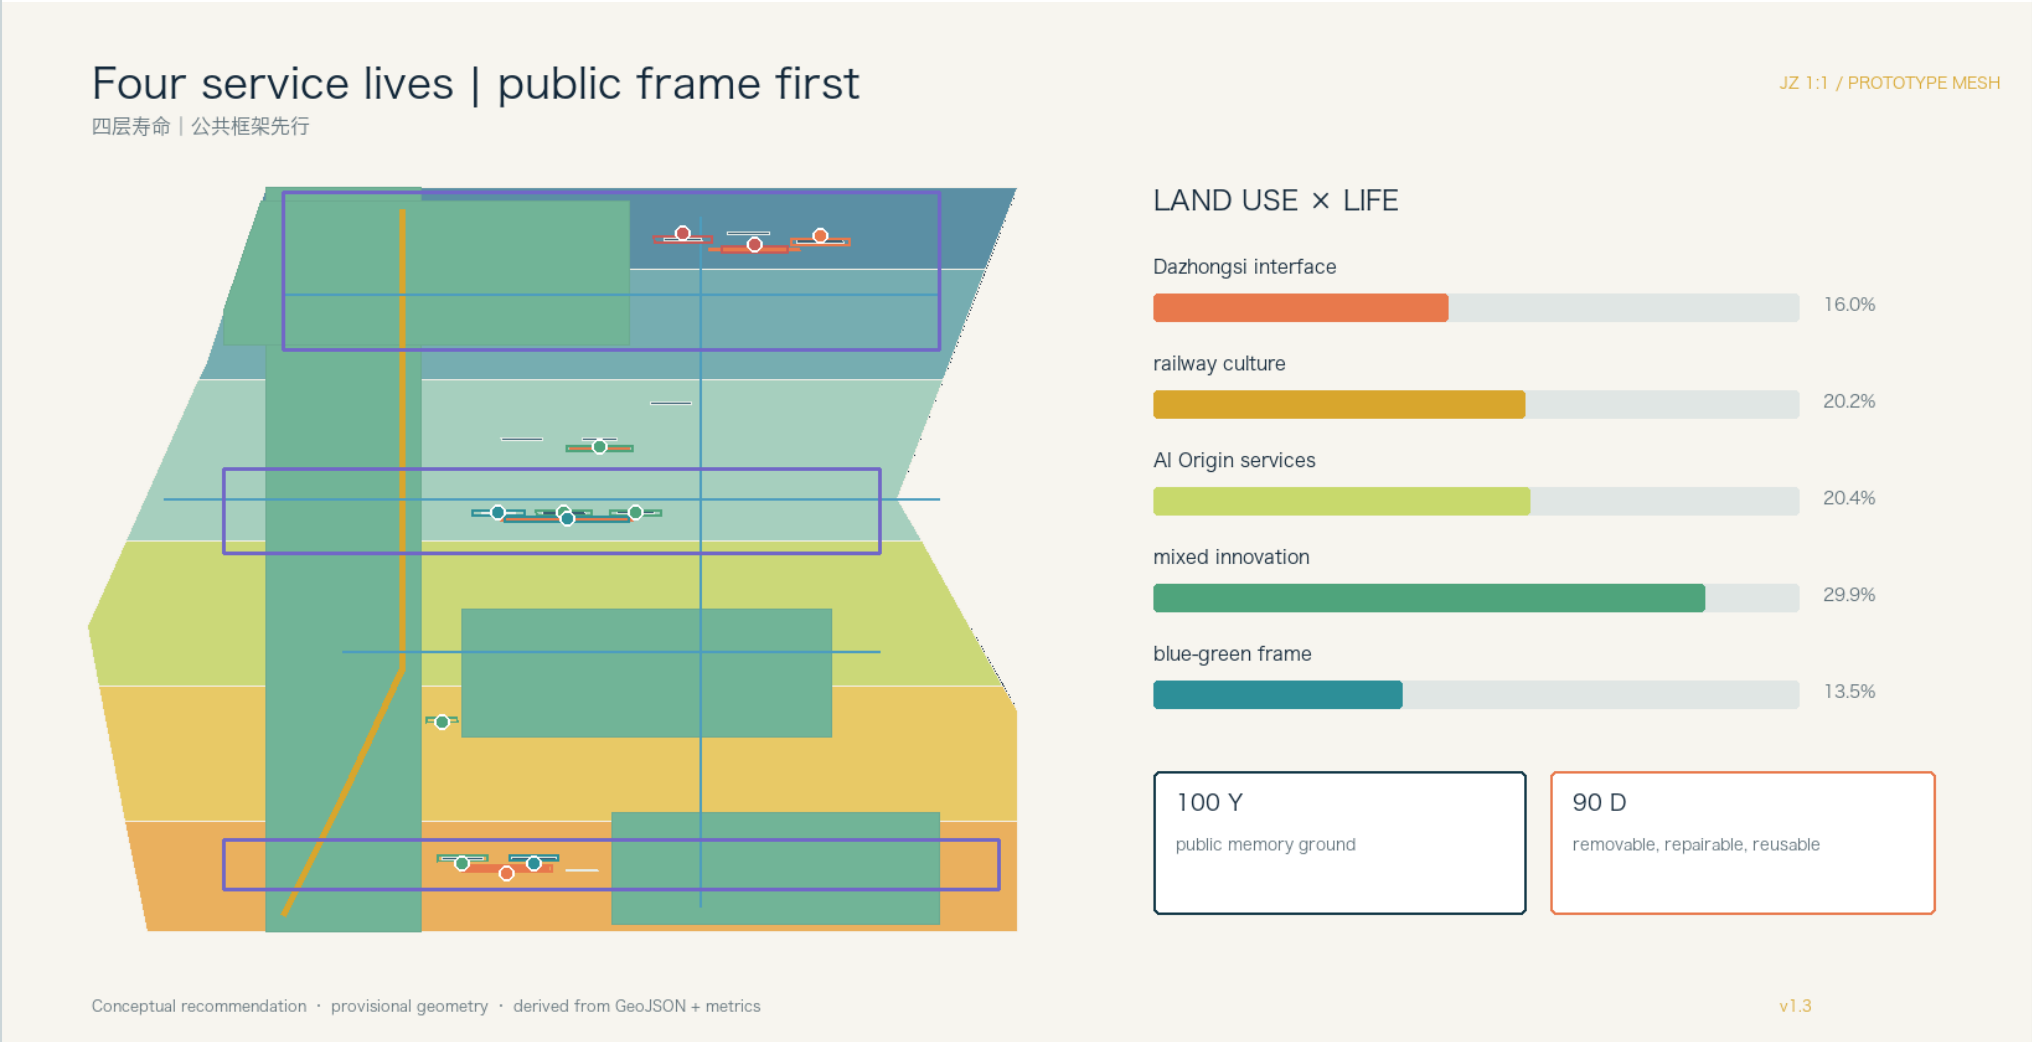

MAKE

Prototype rooms, courtyards, material passports, and a controlled N3 view.

TRANSLATE

Adapt research into service rooms, human counters, and N0/N1 low-exposure routes.


USE

Let daily users decide what stays, what is repaired, and what is retired.

ALGORITHMIC EXPOSURE CADASTRE

Every node records sensing mode, N0–N3 exposure, operating hours, retention, owner, human handover, no-capture mask, expiry, and an offline equivalent. Unregistered footprints stay out of public space.

MAKE → TRANSLATE → USE

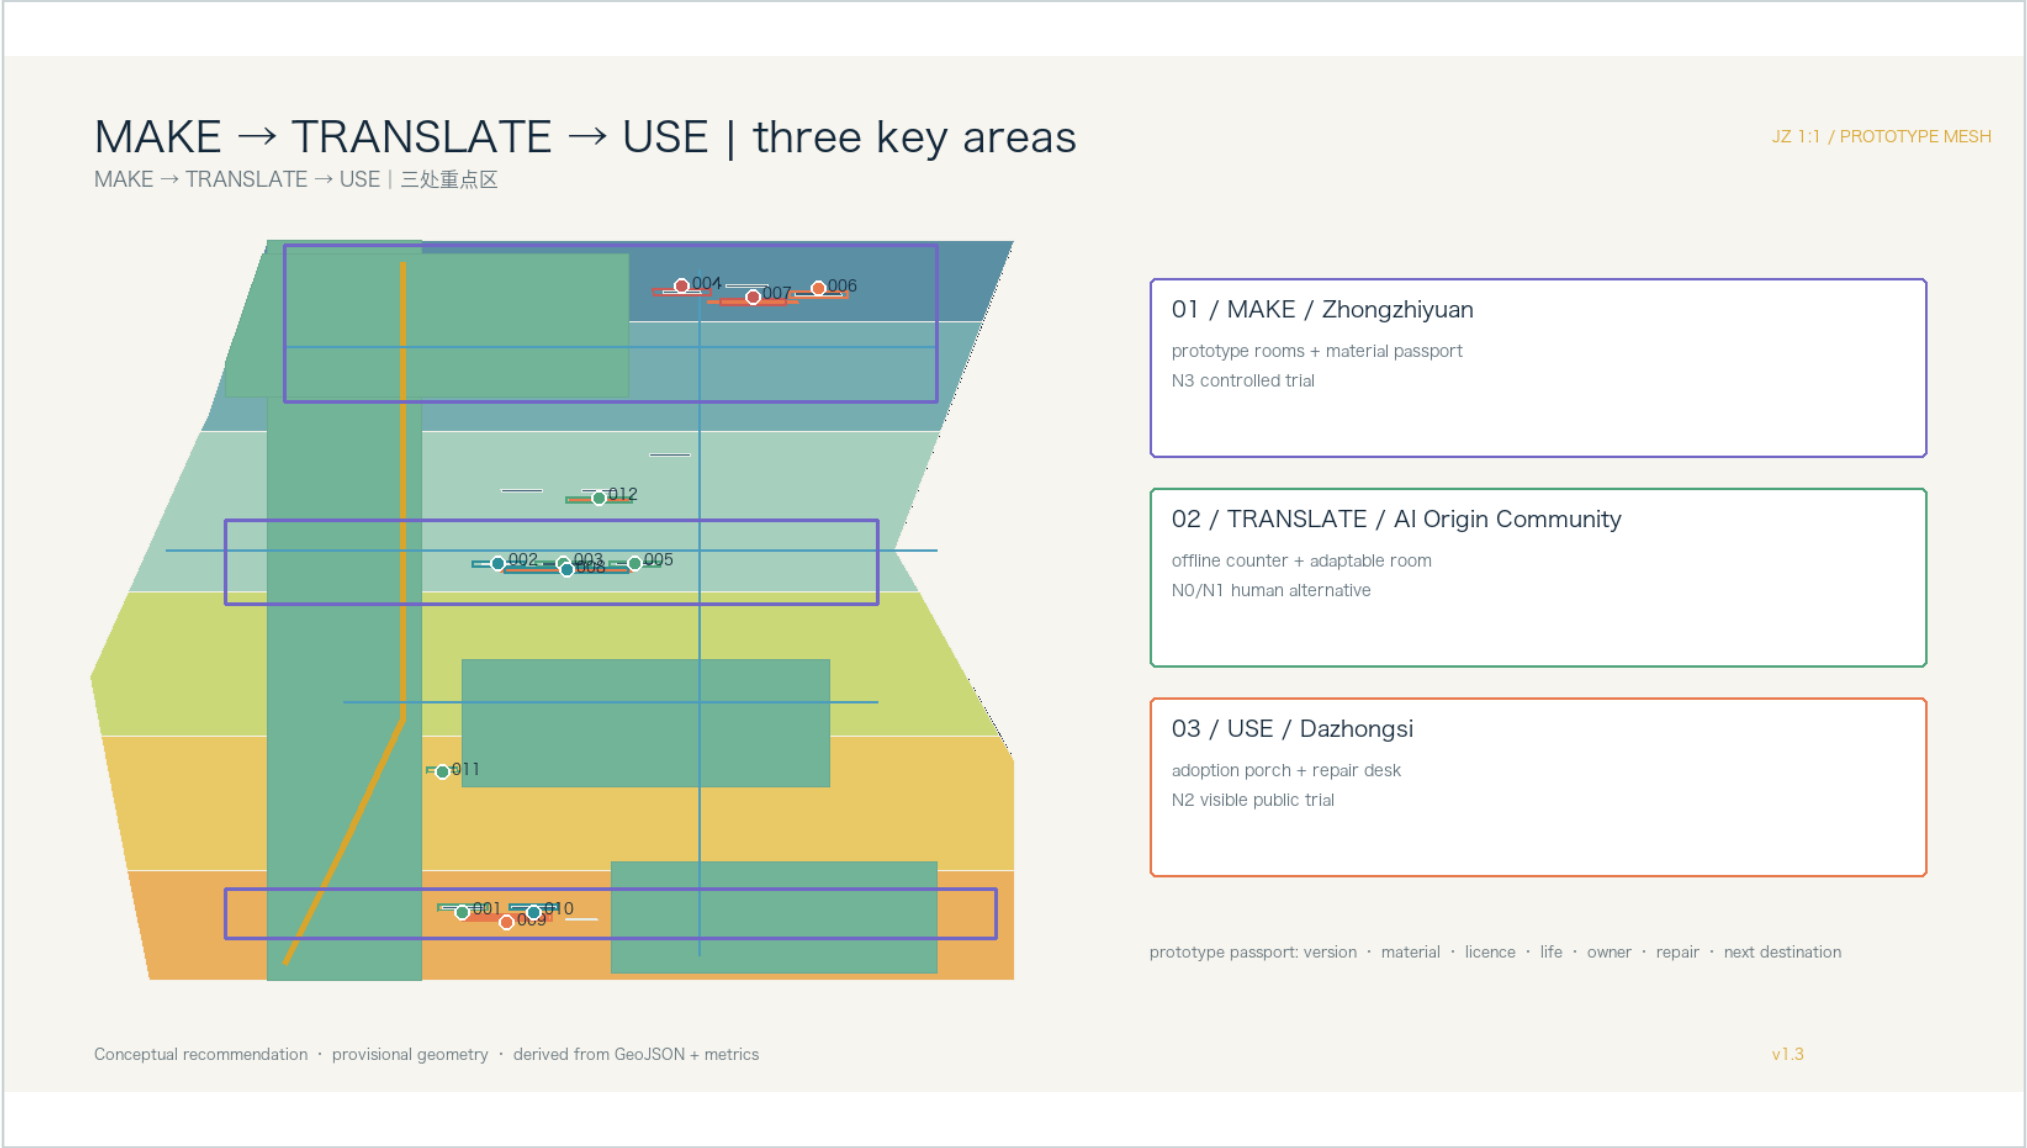


Low-exposure public ground

The diagram consists of three light blue rectangular boxes with rounded corners, each with a colored header bar at the top. The first box has an orange header and contains the text 'LOW-EXPOSURE ROUTE' in bold, followed by 'N0/N1 walking, shade, accessibility, and an offline alter native.' The second box has a blue header and contains the text 'SERVICE EDGE' in bold, followed by 'Repair, loading, and low-speed service stay on second ary edges.' The third box has a red header and contains the text 'OFF-STATE' in bold, followed by 'Every kit publishes hours, stop trigger, and restoration mode.'

LOW-EXPOSURE ROUTE	SERVICE EDGE	OFF-STATE
N0/N1 walking, shade, accessibility, and an offline alter native.	Repair, loading, and low-speed service stay on second ary edges.	Every kit publishes hours, stop trigger, and restoration mode.

Twelve cards, four service lives

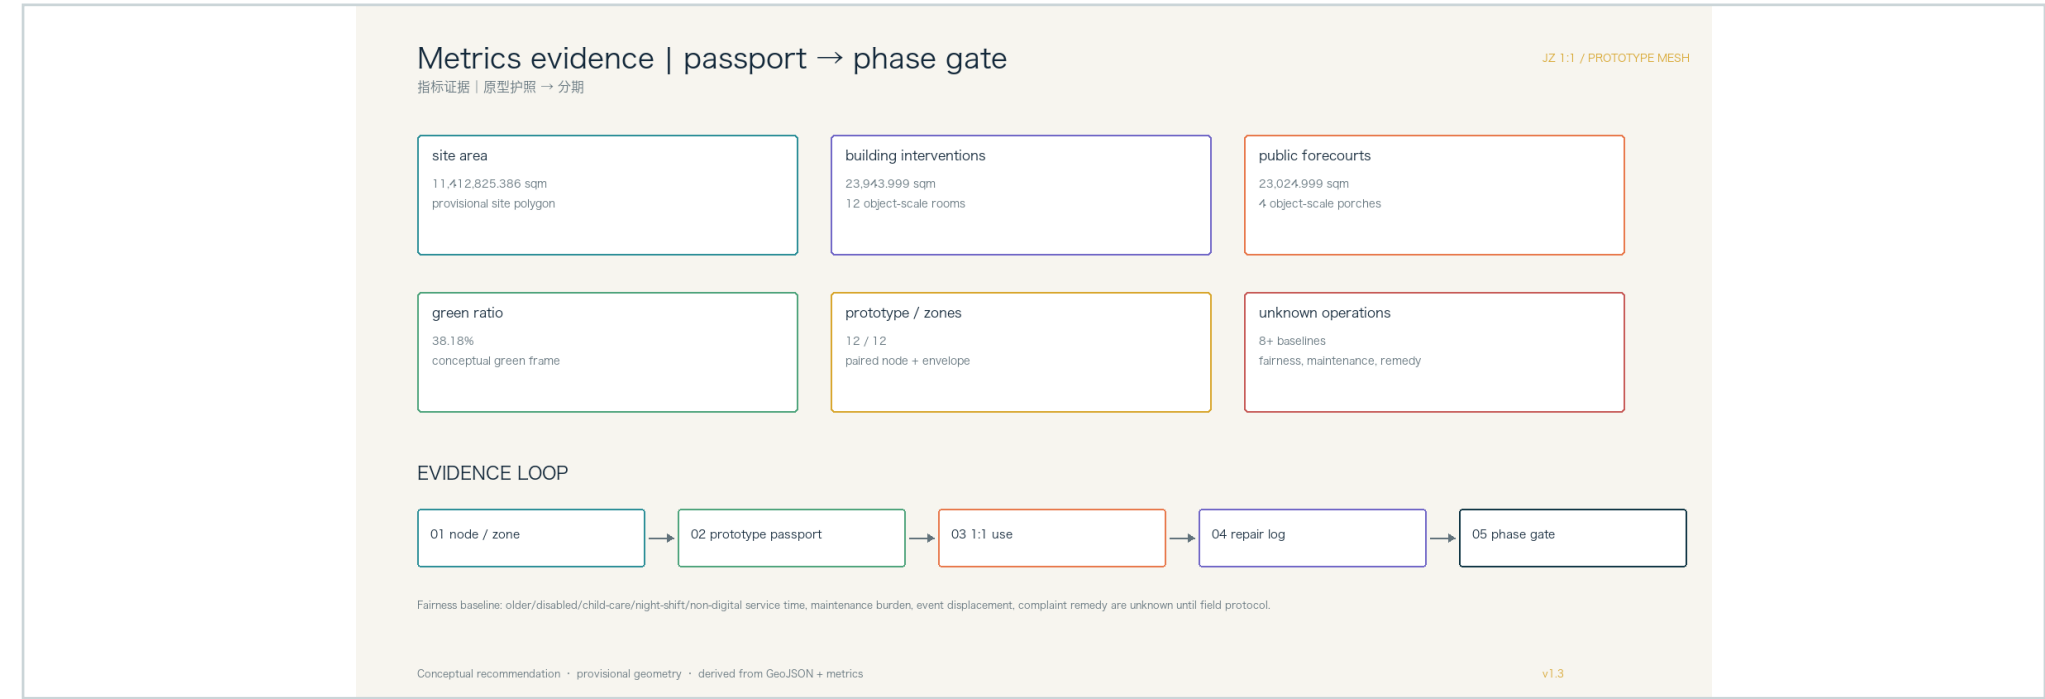

Passport → field review → repair

P0 / SURVEY


Official geometry, ownership, building survey, and public-frame inventory; register every node.

P1 / 90 DAYS

One low-risk prototype in MAKE, TRANSLATE, and USE; publish faults and the off-state.

P2 / 3 + 30 YEARS

Adapt service rooms, then deepen shade, access, drainage, lighting, and blue-green frame after formal checks.

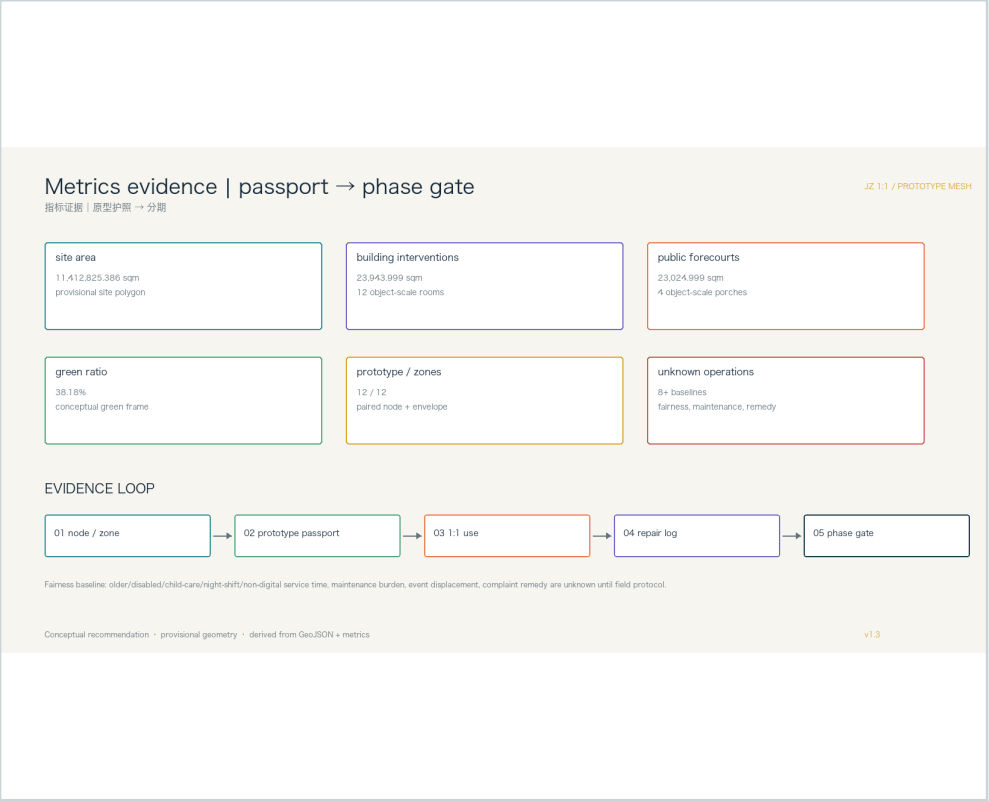

KNOWN / UNKNOWN

Known: area, ratios, node count, scenario count, personas, honour nodes, and exposure-register coverage. Unknown until operation: room adaptability, reuse rate, off-state verification, public-mode hours, route continuity, and response time.

PUBLIC INTEREST FLOOR

Human and offline service remains parallel. A sensing threshold pauses the kit; a public log explains why; repair, reuse, or retirement follows. Provisional geometry is replaced and the full package is recomputed before formal use.