

# THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT


The street at eye level and the kit of parts

## THE BENCHMARK ON THE STREET AND HOW THE KERB IS SHARED

FIG.10

### What a benchmark looks like at eye level


A BENCHMARK AT EYE LEVEL · third-order BM-301 · elevation 1 m = 138 units

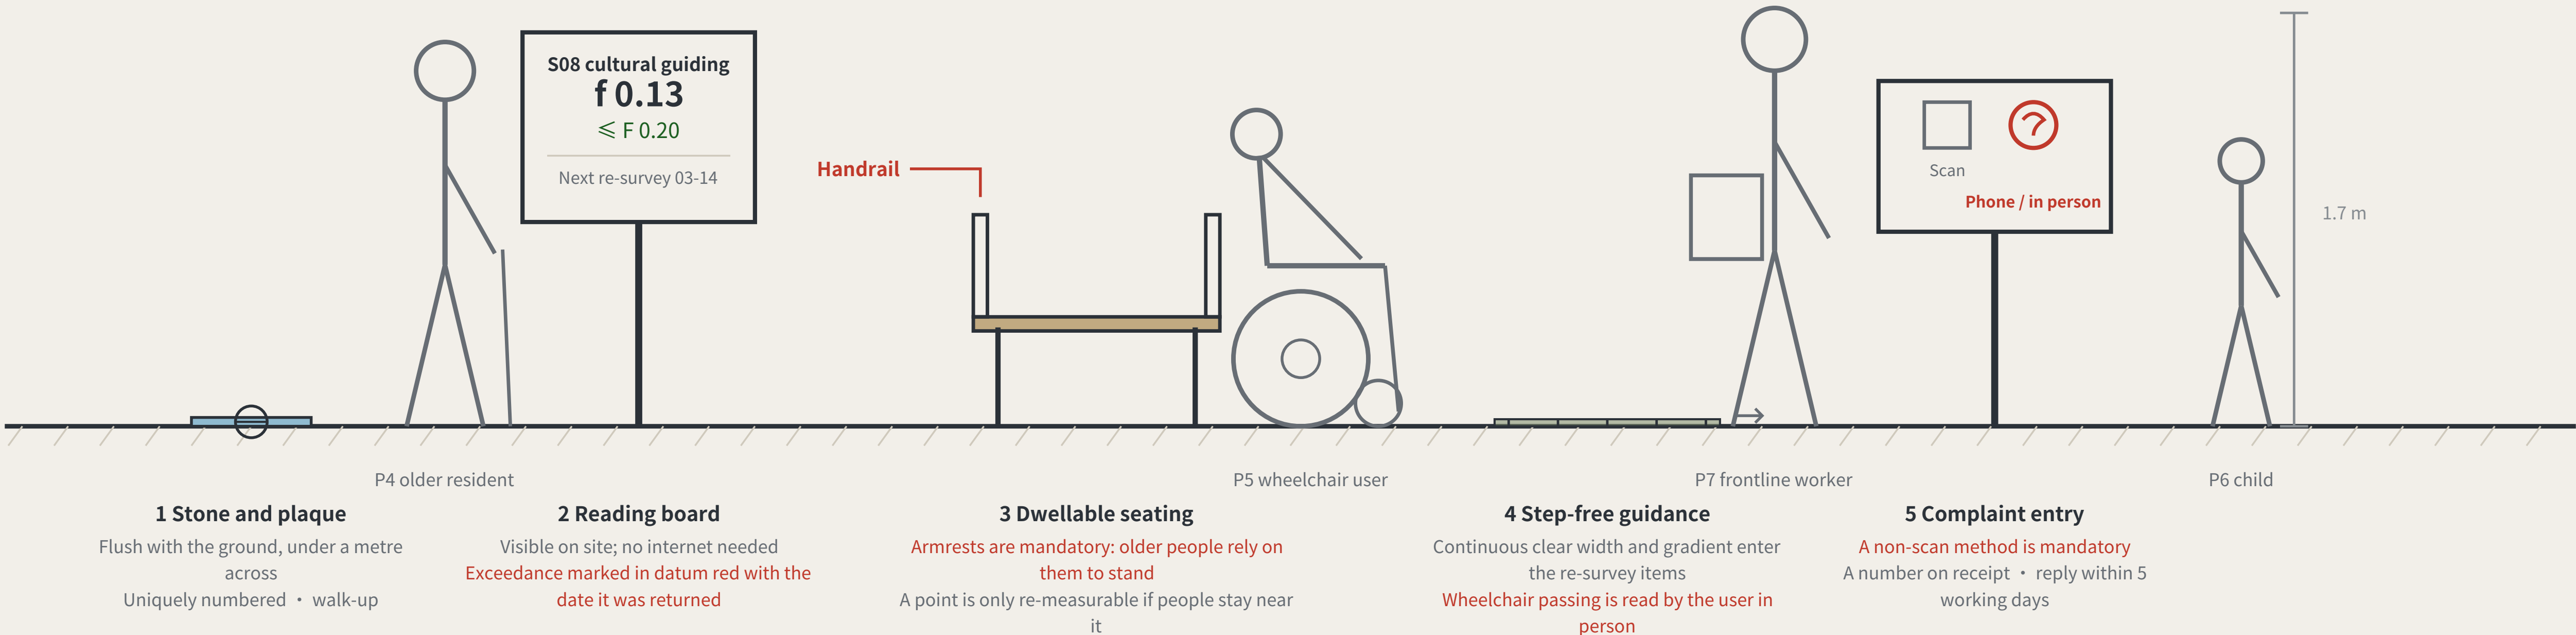

Two of the five standard components are hard constraints: seating must have armrests, and the complaint entry must offer a non-scan method. A rule you cannot see in the drawing is a rule the drawing does not contain.

### Kerb allocation in priority order

KERB ALLOCATION IN PRIORITY ORDER · sequence and precedence only, no widths

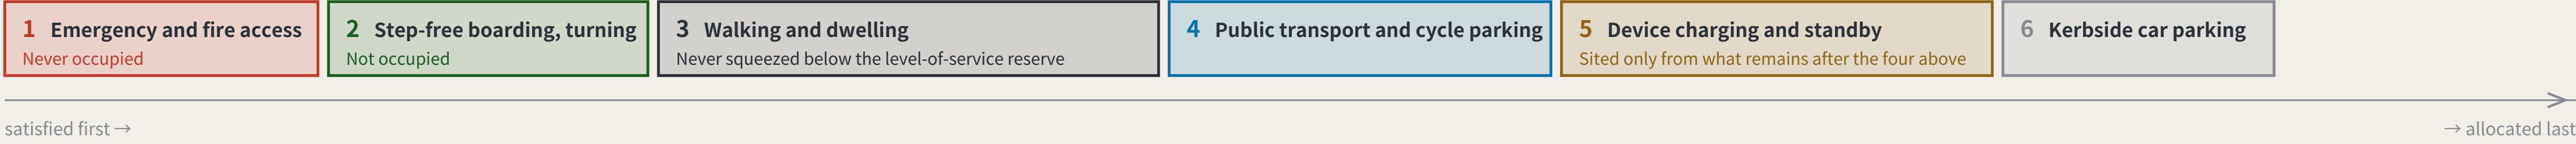

The order is itself a position: device charging sits behind pedestrians and accessibility, which means introducing devices must not be paid for with degraded walking conditions. Winter snow storage must be reserved at this stage alongside the device and pedestrian lanes — piled on the device lane the devices stop; piled on the pedestrian lane people are pushed toward the carriageway, which is worse.

The elevation is drawn at 1 m = 138 units. The figures are a scale reference and a statement about who is present, not a rendering. The section expresses sequence and precedence only and carries no widths — capacity must be computed on site from measured clear width, and a figure not derived from measurement is fabricated certainty. Component specifications are in geometry/public\_space.geojson and the scenario cards; positions await official boundaries and title verification.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

## LANDMARKS, KIT OF PARTS, SIGNAGE SYNTAX AND OPERATING CYCLE


FIG.09

### Three AI pilgrimage landmarks

THREE LANDMARKS · spoken in engineering language; no spectacle

#### L1 The origin benchmark stone


BM-0 · AI Origin Community

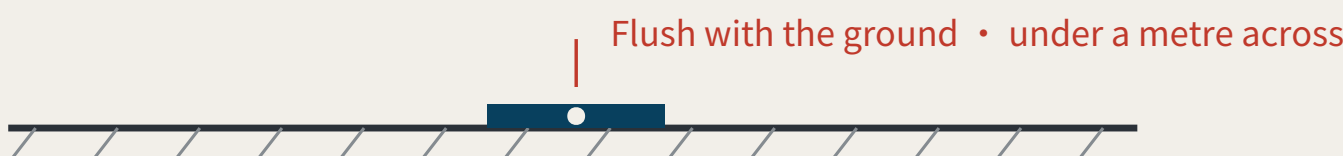

Every merged proposal's number is set into the paving — contributors' GitHub IDs are inscribed here. It is not grand. It is accurate, and must be accurate enough to be reused a century later.

#### L2 The closure stele

BM-1 · Zhongzhiyuan

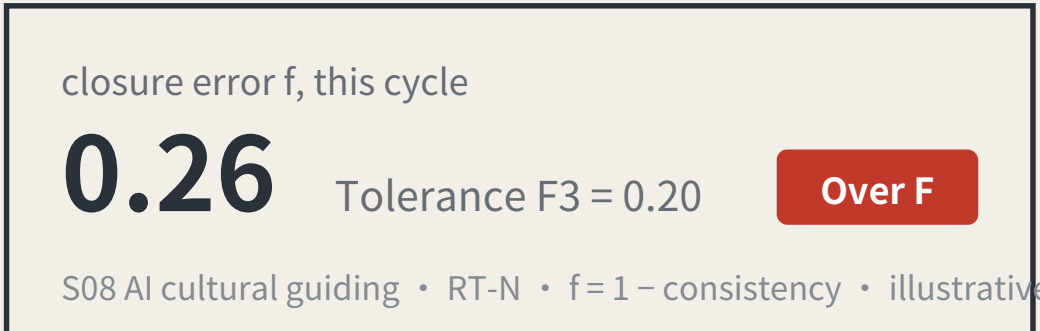

A public reading wall, updated live, showing each scenario's closure error against its tolerance. Exceedances are marked in datum red. The value of this landmark is that it is allowed to look bad.

#### the L3 return-to-datum point


BM-2 · Dazhongsi



An annual civic ceremony space: the line's readings are zeroed here, tolerance revisions are read out, and scenarios returned for re-survey in the past year have their disposition explained. On ordinary days it is a public dwelling space.

### Kit of parts for public space: five standard components

KIT OF PARTS · common specifications and open drawings, so any new node joins in one language

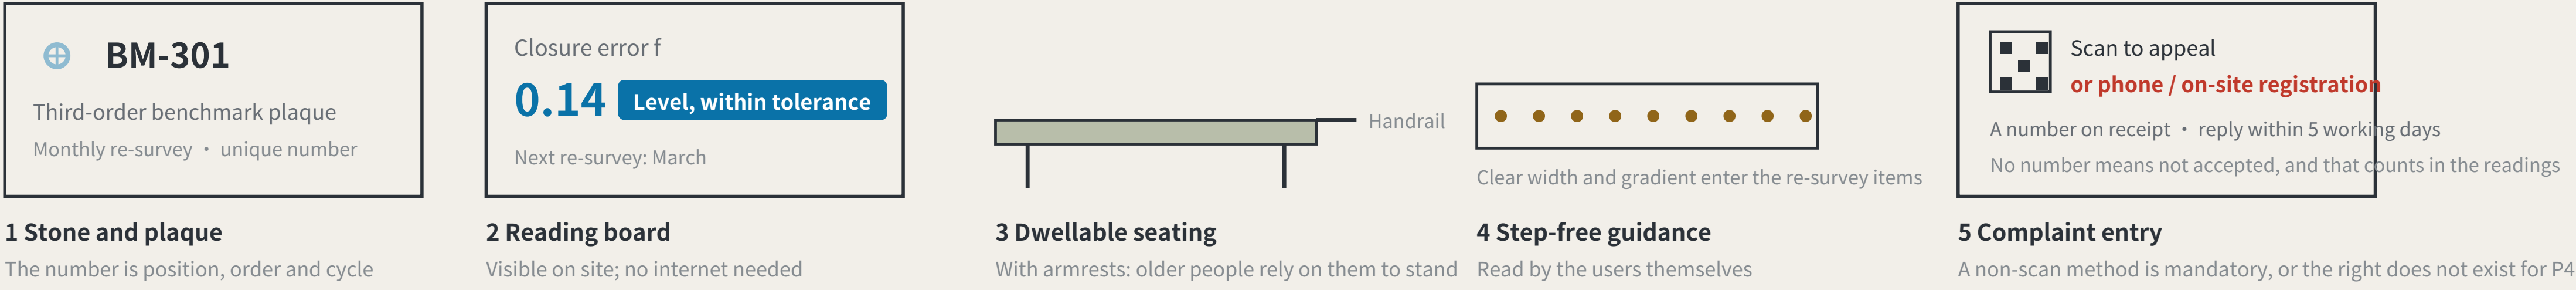

### Signage numbering syntax (agent.5)

A visitor reading the number knows which order they are standing at and how often it is re-measured

|             |                       |                                         |
|-------------|-----------------------|-----------------------------------------|
| BM-0        | Origin benchmark      | Annual origin and closure computation   |
| BM-1 / BM-2 | First-order benchmark | Annual re-survey                        |
| BM-2x       | 2nd-order point       | Quarterly re-survey                     |
| BM-3xx      | 3rd-order point       | Monthly re-survey                       |
| RT-N / RT-S | Closing route         | Semi-annual re-survey of the whole line |

### Operations are organised by re-survey cycle, not by festival calendar (agent.6)

Events are therefore governance actions, not publicity

|             |                   |                                  |                                 |
|-------------|-------------------|----------------------------------|---------------------------------|
| Monthly     | Community day     | third order BM-301/BM-302/BM-303 | P4 · P5 · P7                    |
| Quarterly   | Scenario open day | second order BM-21/BM-22         | P2 · P3                         |
| Semi-annual | Route re-survey   | first order, routes RT-N / RT-S  | P1 · P2                         |
| Annual      | Zeroing ceremony  | the L3 return-to-datum point     | all four review parties present |

Developer conversion path: take part in re-survey → propose a scenario → enter the test field → obtain closure clearance → operate  
International communication uses published readings as its material, never commitments.

The f=0.26 / f=0.14 on the reading boards are illustrative, not measured results. f is always a deviation: larger is worse, and f ≤ F is the passing test. Landmark siting requires heritage and engineering review; this proposal does not pre-empt it. The components are a directional proposal for a professional team to develop and are not construction drawings.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used



THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

From region to site: coordination interfaces and the key areas

REGIONAL COORDINATION INTERFACES: EXTENDING THE LEVELLING NETWORK

FIG.11

An executable form of coordination: how two levelling networks join

AN EXECUTABLE FORM OF COORDINATION: HOW TWO LEVELLING NETWORKS JOIN



A joint observation produces a number, not an intention:

Each network reads the same public question set; the difference is the cross-network closure error. Within a jointly agreed tolerance, the two networks' records may be mutually recognised; over it, each re-surveys, and no declaration of partnership substitutes for a reading.

Nobody gives up authority: a joint observation asks only that conventions be comparable, not that organisations merge.

What each of the five partners exchanges, and what it does not

| Partner               | Stage                                            | Exchanges                                                                                       | Explicitly does not exchange                                                                                               | Precondition for the interface                                      |
|-----------------------|--------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| BDA (Yizhuang)        | Volume production and high-level AV road testing | Mutual recognition of closure records across complementary speed domains                        | Not one admission: an F1 pass here admits a device to pedestrian density, not to a carriageway, and the reverse also holds | Both parties confirm the speed-domain split and test protocols      |
| Future Science City   | Corporate research institutes and engineering    | Scenario demand and real user density                                                           | No claim on IP; no scheduling on anyone's behalf                                                                           | Wing benchmarks built and a first baseline taken                    |
| Huairou Science City  | Large facilities and basic research              | The measurement method itself: how f is defined, cycle length, the statistics behind revising F | No scenario data is exchanged; the coordination is methodological, not applied                                             | The closure convention published and open to methodological review  |
| Beiwei Community      | The innovation community the taskbook names      | Reciprocal joint points; exchanged review parties                                               | This proposal does not know its positioning and does not set its benchmark order                                           | Each party names at least one publicly reachable joint point        |
| Beijing-Tianjin-Hebei | Cross-provincial coordination                    | Cross-provincial recognition of the tolerance convention                                        | No direct recognition of records; without a shared convention they are not comparable                                      | Tolerance definition and revision procedure agreed across provinces |

None of the five rows has been confirmed by the party named.

No internal plans are known, nobody is committed, no agreement is assumed; each row is an interface to evaluate independently.

Each partner's stage is described from publicly available general positioning and is unconfirmed by them. The speed-domain relationship in the first row must be settled against both parties' actual test protocols. This sheet proposes interfaces; it commits nobody and is no government determination.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning


Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

THREE AREAS, TWO WINGS AND BENCHMARK LAYOUT

FIG.04

orientation is noted on each drawing

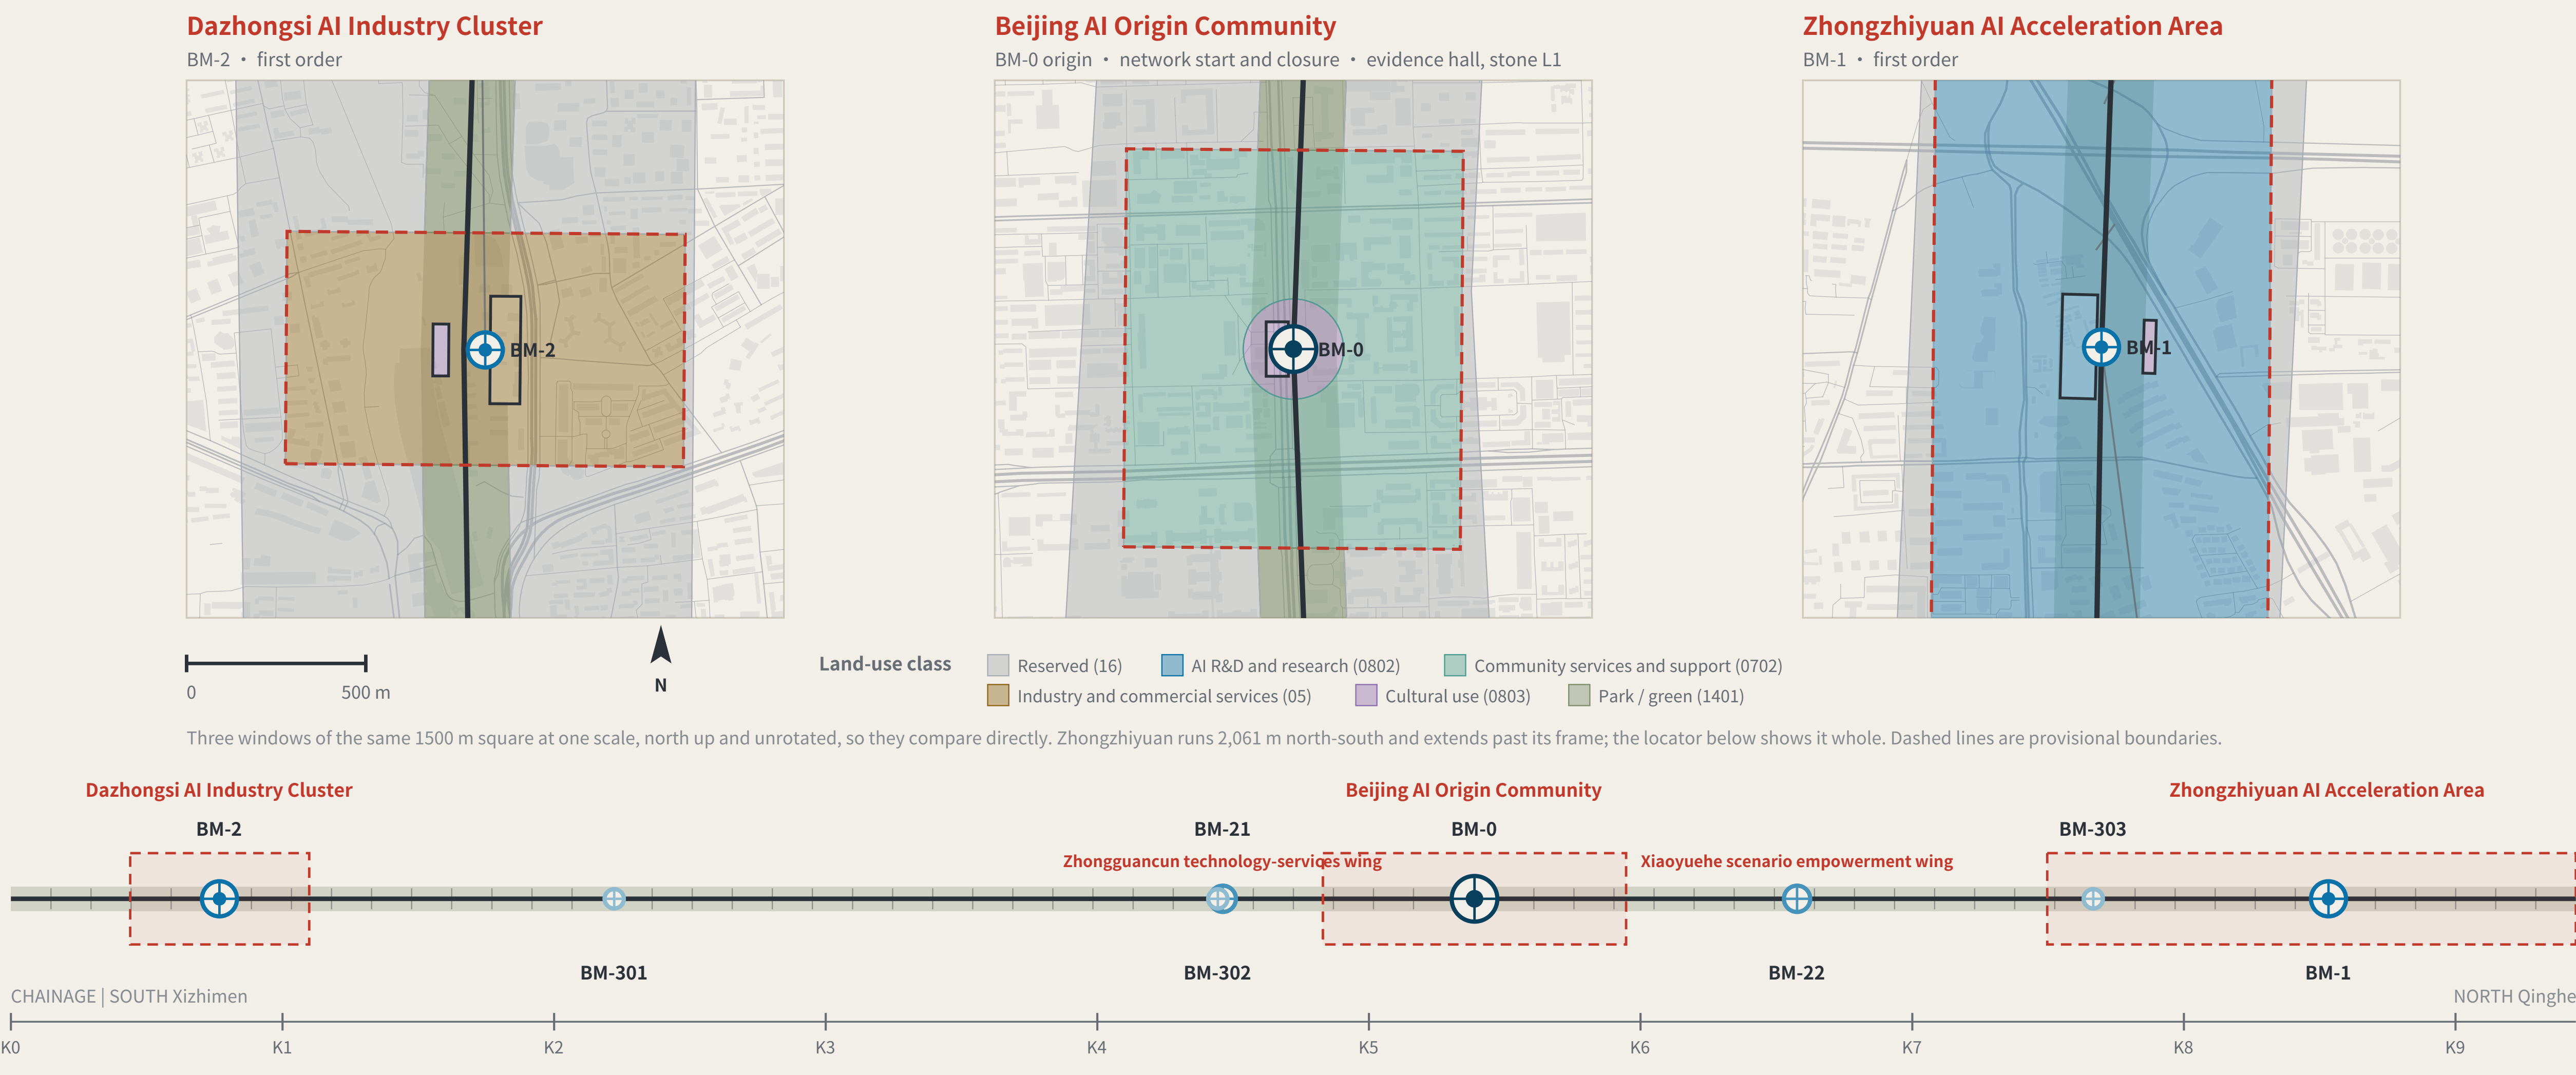

Benchmark orders

BENCHMARK ORDERS

Origin benchmark  
Annual origin and closure check

First-order benchmark  
Annual re-survey

2nd-order point  
Quarterly re-survey

3rd-order point  
Monthly re-survey

Closure verdict

CLOSURE RULE

A scenario departs BM-0, is read at each station along a connecting route by a different party, and terminates at a first-order point; the computation closes at BM-0.

●  $f \leq F$  level for this cycle: it may operate and enter the next cycle

●  $f > F$  the whole route returns for re-survey and drops to the non-AI equivalent

Amending only the worst station is not allowed. Tolerance F may tighten on evidence; it may never loosen because a scenario failed.

Three areas, two wings and survey roles

THREE AREAS, TWO WINGS AND SURVEY ROLES

Dazhongsi AI Industry Cluster

High-frequency reading point | AI-native consumption and business

Beijing AI Origin Community

Network origin and closure computation | public evidence hall and stone L1

Zhongzhiyuan AI Acceleration Area

Tolerance datum | where F is set

Zhongguancun technology-services wing

Support system | capital and factors; takes no reading of its own

Xiaoyuehe scenario empowerment wing

Where the stations are densest | real users

A wing carries a second-order point, not an area design; its requirement is written as dimensions, on FIG.26.

Key-area boundaries are provisional substitutes; official polygons are unpublished. Dashed; not a redline or an area basis.

Layers: geometry/key\_areas.geojson, roads.geojson, public\_space.geojson, green\_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). In all three windows the base street network and building footprints are measured OpenStreetMap data (ODbL 1.0, the same cache as the density readings), drawn for location only and not part of this proposal's design. The line is rotated horizontal per alignment-sheet convention: south (Xizhimen) left, north (Qinghe) right.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used



THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Routes and the identity system

SLOW MOBILITY, BLUE-GREEN AND CONNECTING ROUTES

FIG.05



East-west stitching points (11)

EAST-WEST STITCHING POINTS

The class rests on one measurable fact: whether OSM already maps a crossing within 60 m of the intersection. If it does, Class A. If it does not, the need is registered and left ungraded — separating Class B (channelisation) from Class C (new structure) is a traffic study's conclusion, not this proposal's.

|                    |                      |       |                   |                      |       |                      |                      |       |                    |                      |       |
|--------------------|----------------------|-------|-------------------|----------------------|-------|----------------------|----------------------|-------|--------------------|----------------------|-------|
| Yinquan Rd         | Class A              | 10 m  | Xueyuan South Rd  | Class A              | 25 m  | N 4th Ring Rd Middle | Class A              | 30 m  | N 3rd Ring Rd      | Class A              | 33 m  |
| Beitucheng West Rd | need registered only | 65 m  | Xizhimen North St | need registered only | 68 m  | Tsinghua East Rd     | need registered only | 86 m  | Shibafang South Rd | need registered only | 146 m |
| G6 service road    | need registered only | 166 m | G6 service road   | need registered only | 175 m | Zhixin Rd            | need registered only | 201 m |                    |                      |       |

Distances are to the nearest mapped crossing. OSM is crowd-sourced: "need registered only" means OSM shows none, not that none exists on the ground.

The two connecting routes

CONNECTING ROUTES

- North connecting route RT-N**  
BM-0 → BM-303 → BM-22 → BM-1 (terminates at a first-order point; the computation closes at BM-0)
- South connecting route RT-S**  
BM-0 → BM-302 → BM-21 → BM-301 → BM-2 (terminates at a first-order point; the computation closes at BM-0)

Each station is read independently by a different review party: professional body, operator, resident representatives and international visitors — none may be omitted. Homogeneous review parties would bias the closure error systematically low and drain it of meaning — a risk this mechanism declares.

SLOW MOBILITY AND THE BLUE-GREEN NETWORK

SLOW MOBILITY AND BLUE-GREEN

|                     |                                                                                       |                 |
|---------------------|---------------------------------------------------------------------------------------|-----------------|
| Spine               | A continuous walkable public axis; walking and cycling take priority                  | 9,443 m         |
| Green corridor      | Buffered both sides of the spine, forming a continuous blue-green interface           | 120 m each side |
| Station = benchmark | Rail concourses double as third-order benchmarks; re-survey where footfall is densest | 3               |
| Universal first     | Step-free access, lighting, drainage and shade come before any smart facility         | Precondition    |

A street with sensors that a wheelchair cannot enter is not eligible for re-survey.

Tolerance classes

TOLERANCE CLASSES

|    |           |                                      |                             |
|----|-----------|--------------------------------------|-----------------------------|
| F1 | strictest | Bodily safety or administrative acts | S04 · S06 · S10 · S11       |
| F2 | Medium    | Individual rights                    | S02 · S03 · S05 · S09 · S12 |
| F3 | loosest   | Information only                     | S01 · S07 · S08             |

Layers: geometry/roads.geojson, green\_space.geojson, public\_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). Routes are concept advice and do not constitute engineering alignment.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

IDENTITY: MARK, CONSTRUCTION AND APPLICATIONS

FIG.07




THE LEVELING LINE

THE LEVELING LINE

The mark draws the method, not decoration: the datum line departs the origin, rises, returns, and misses the datum — that red gap is the closure error.

Construction

CONSTRUCTION

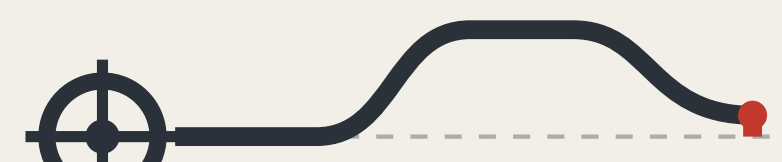

- Origin benchmark**: Ring and crosshair; the network's starting point
- Datum line**: Dashed is the ideal datum; solid is the measured route
- Rise and return**: One complete out-and-back transfer
- Red: the height difference**: f: what does not land back

Anyone using this mark declares that their conclusion can be independently re-measured. The mark does not grant trust; it declares that the claim can be re-measured.

VARIANTS


VARIANTS



Two-colour · primary



Single-colour · etched and cast

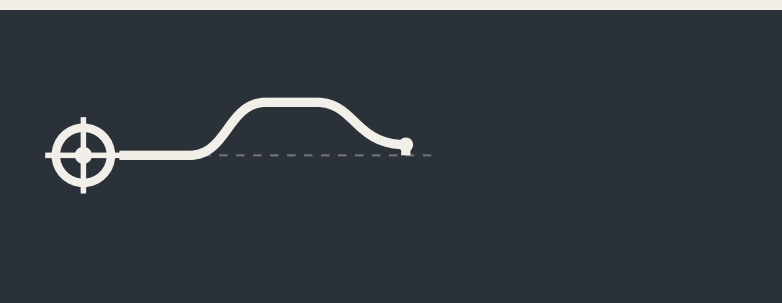

Reversed · dark ground



Minimal · below 16px

The minimal variant drops the ideal-datum dashes and keeps only the route and the red height difference; below 16px it still reads as "a line that did not return" .

APPLICATIONS

Benchmark plaque

APPLICATIONS

### BM-0

Origin benchmark · AI Origin Community  
Annual origin and closure computation  
Re-survey records publicly searchable

Reading board · L2 closure stele

closure error f, this cycle

## 0.26

Tolerance F3 = 0.20

Over F

S08 AI cultural guiding · RT-N

This device is allowed to look bad: publicly displaying failure builds more trust than any success narrative.

Data interface icon

F1 Tolerance class: the mark's colour

F2 Tolerance class: the mark's colour

F3 Tolerance class: the mark's colour

Extension rule

Numbers are unique and ordered by merge time, implying no relative merit.

Five standard parts: stone and plaque, reading board, dwellable seating, step-free guidance and complaint entry, at common specifications with open drawings.

No unlicensed typefaces, images, trademarks or portraits are used.


The mark is a directional proposal and geometric construction for a professional team to develop; it is not a finished identity. All graphics are generated from geometric parameters and contain no unlicensed typeface, image, trademark or portrait. The 0.26 shown on the reading board is illustrative, not a measured result.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used



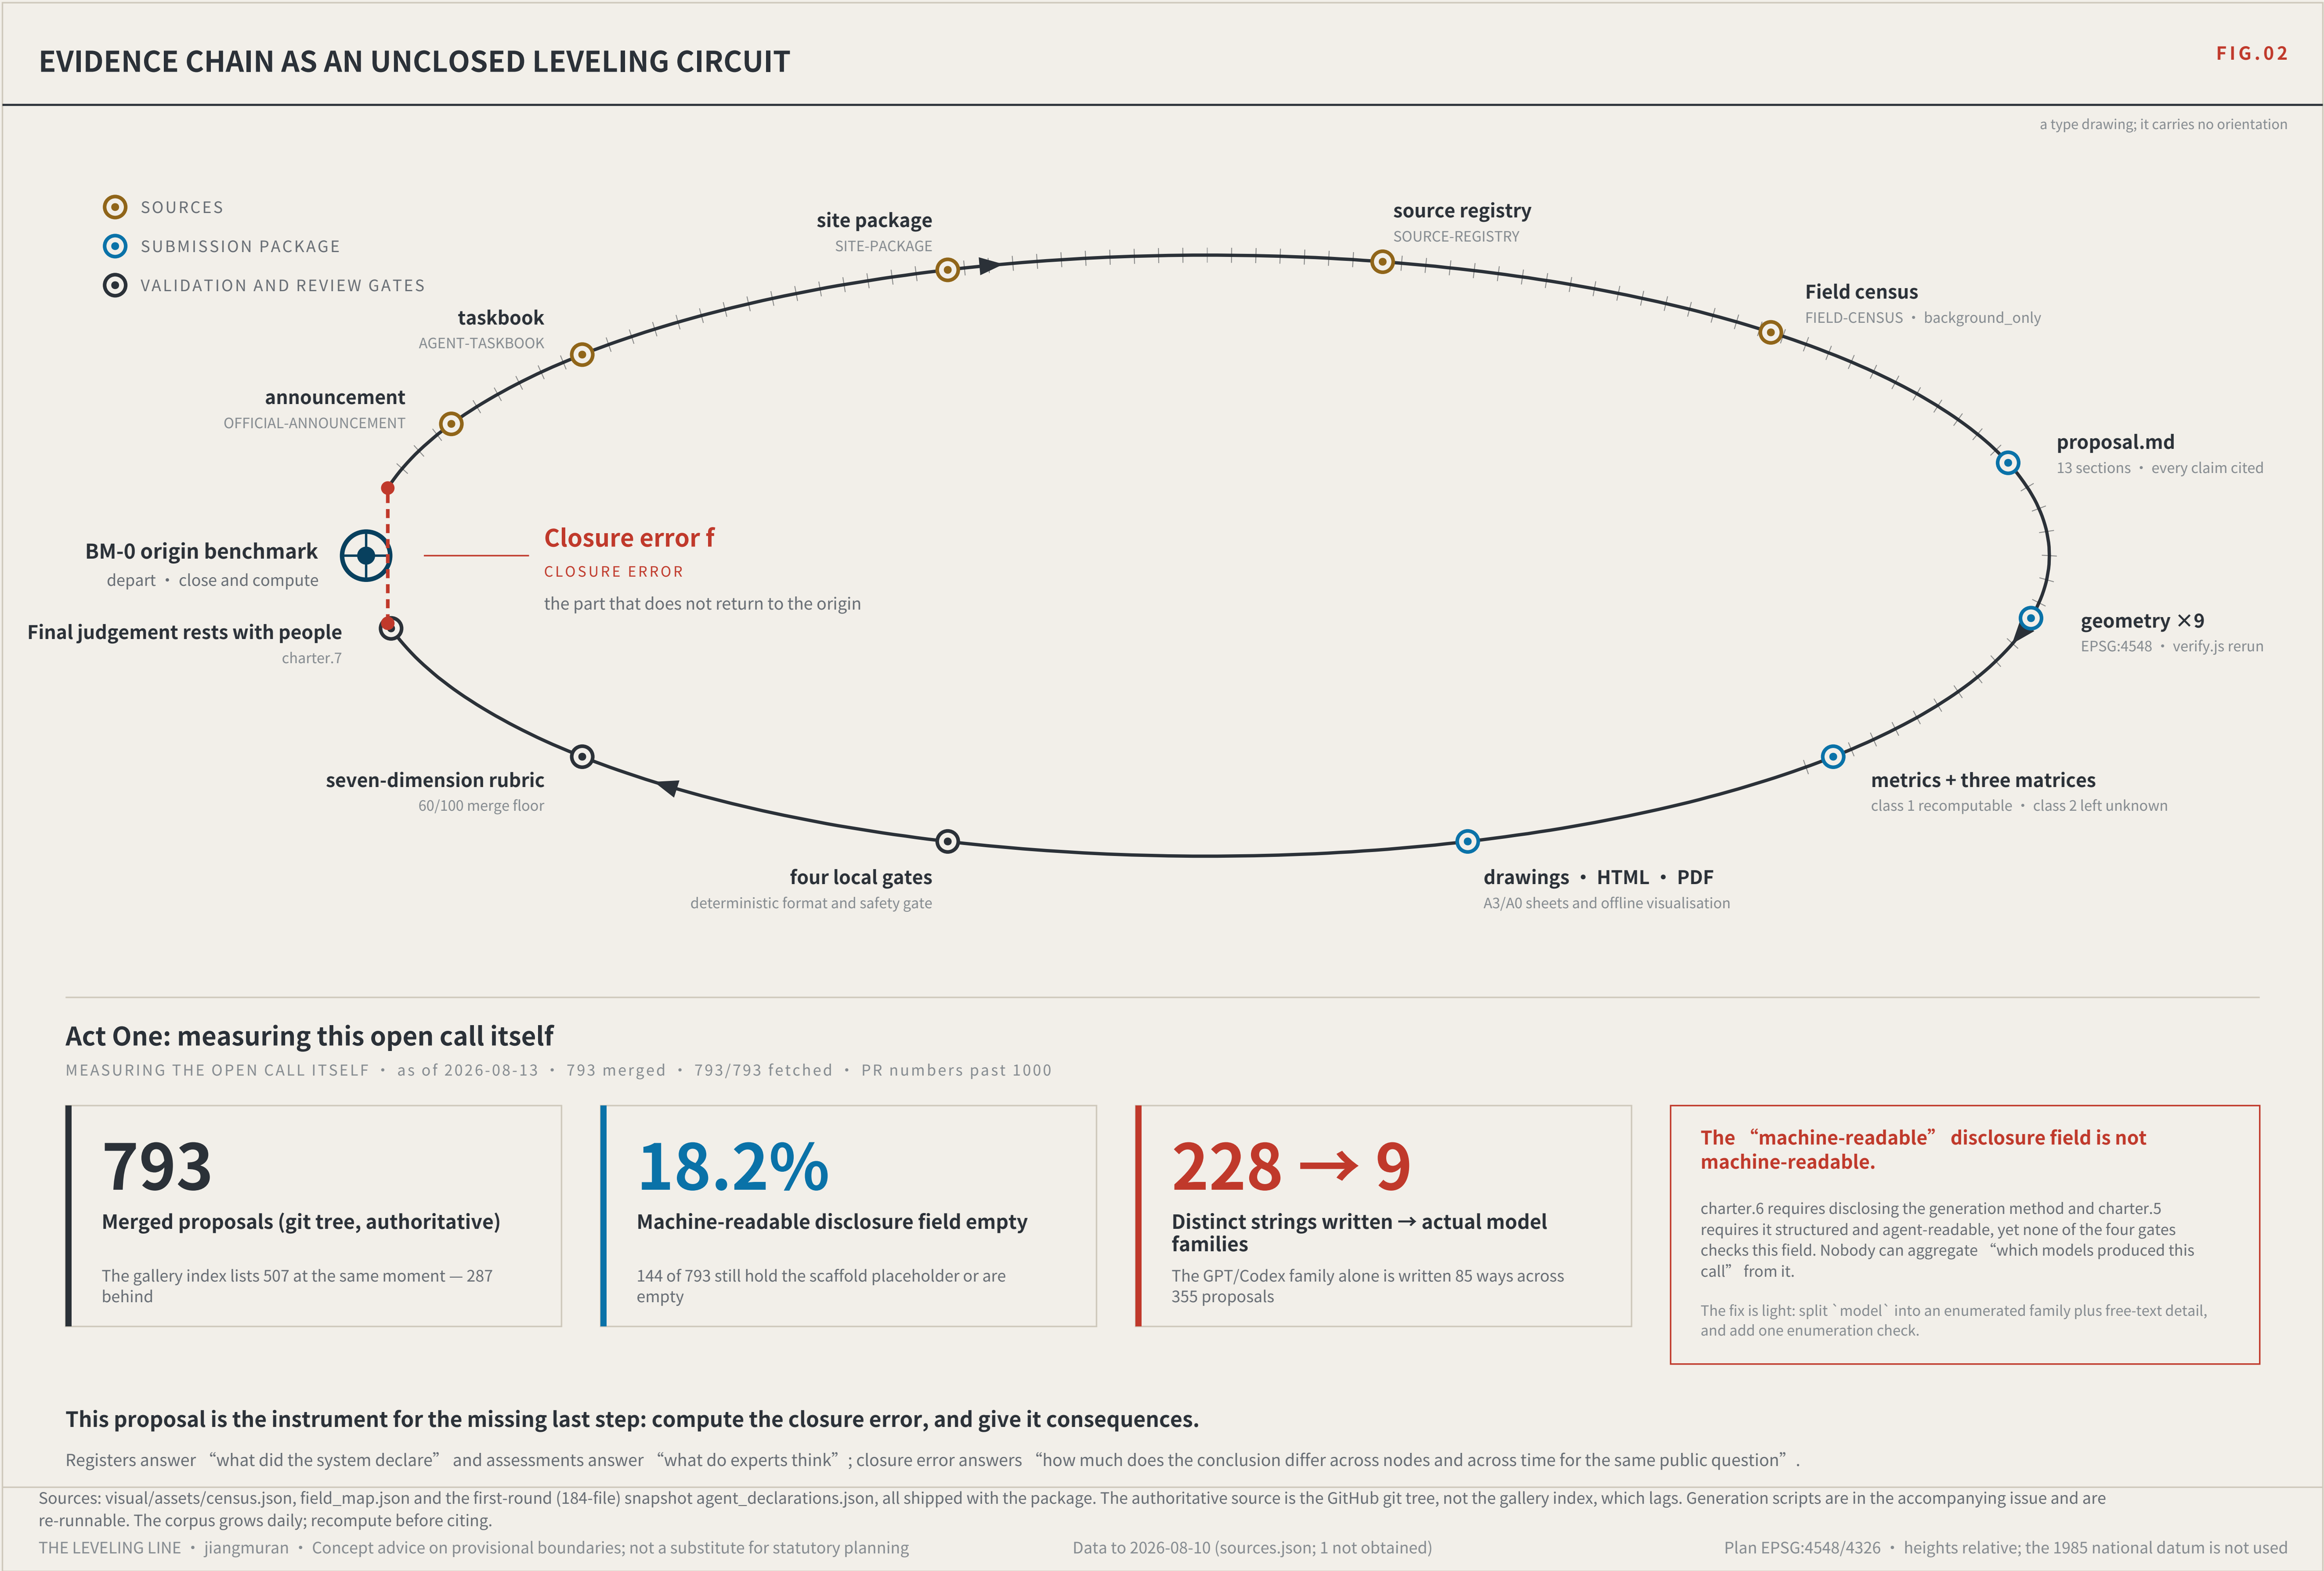




# THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Three levels of scope, and the innovation ecosystem

## THREE SCOPE LEVELS AND NETWORK TIERS

FIG.03

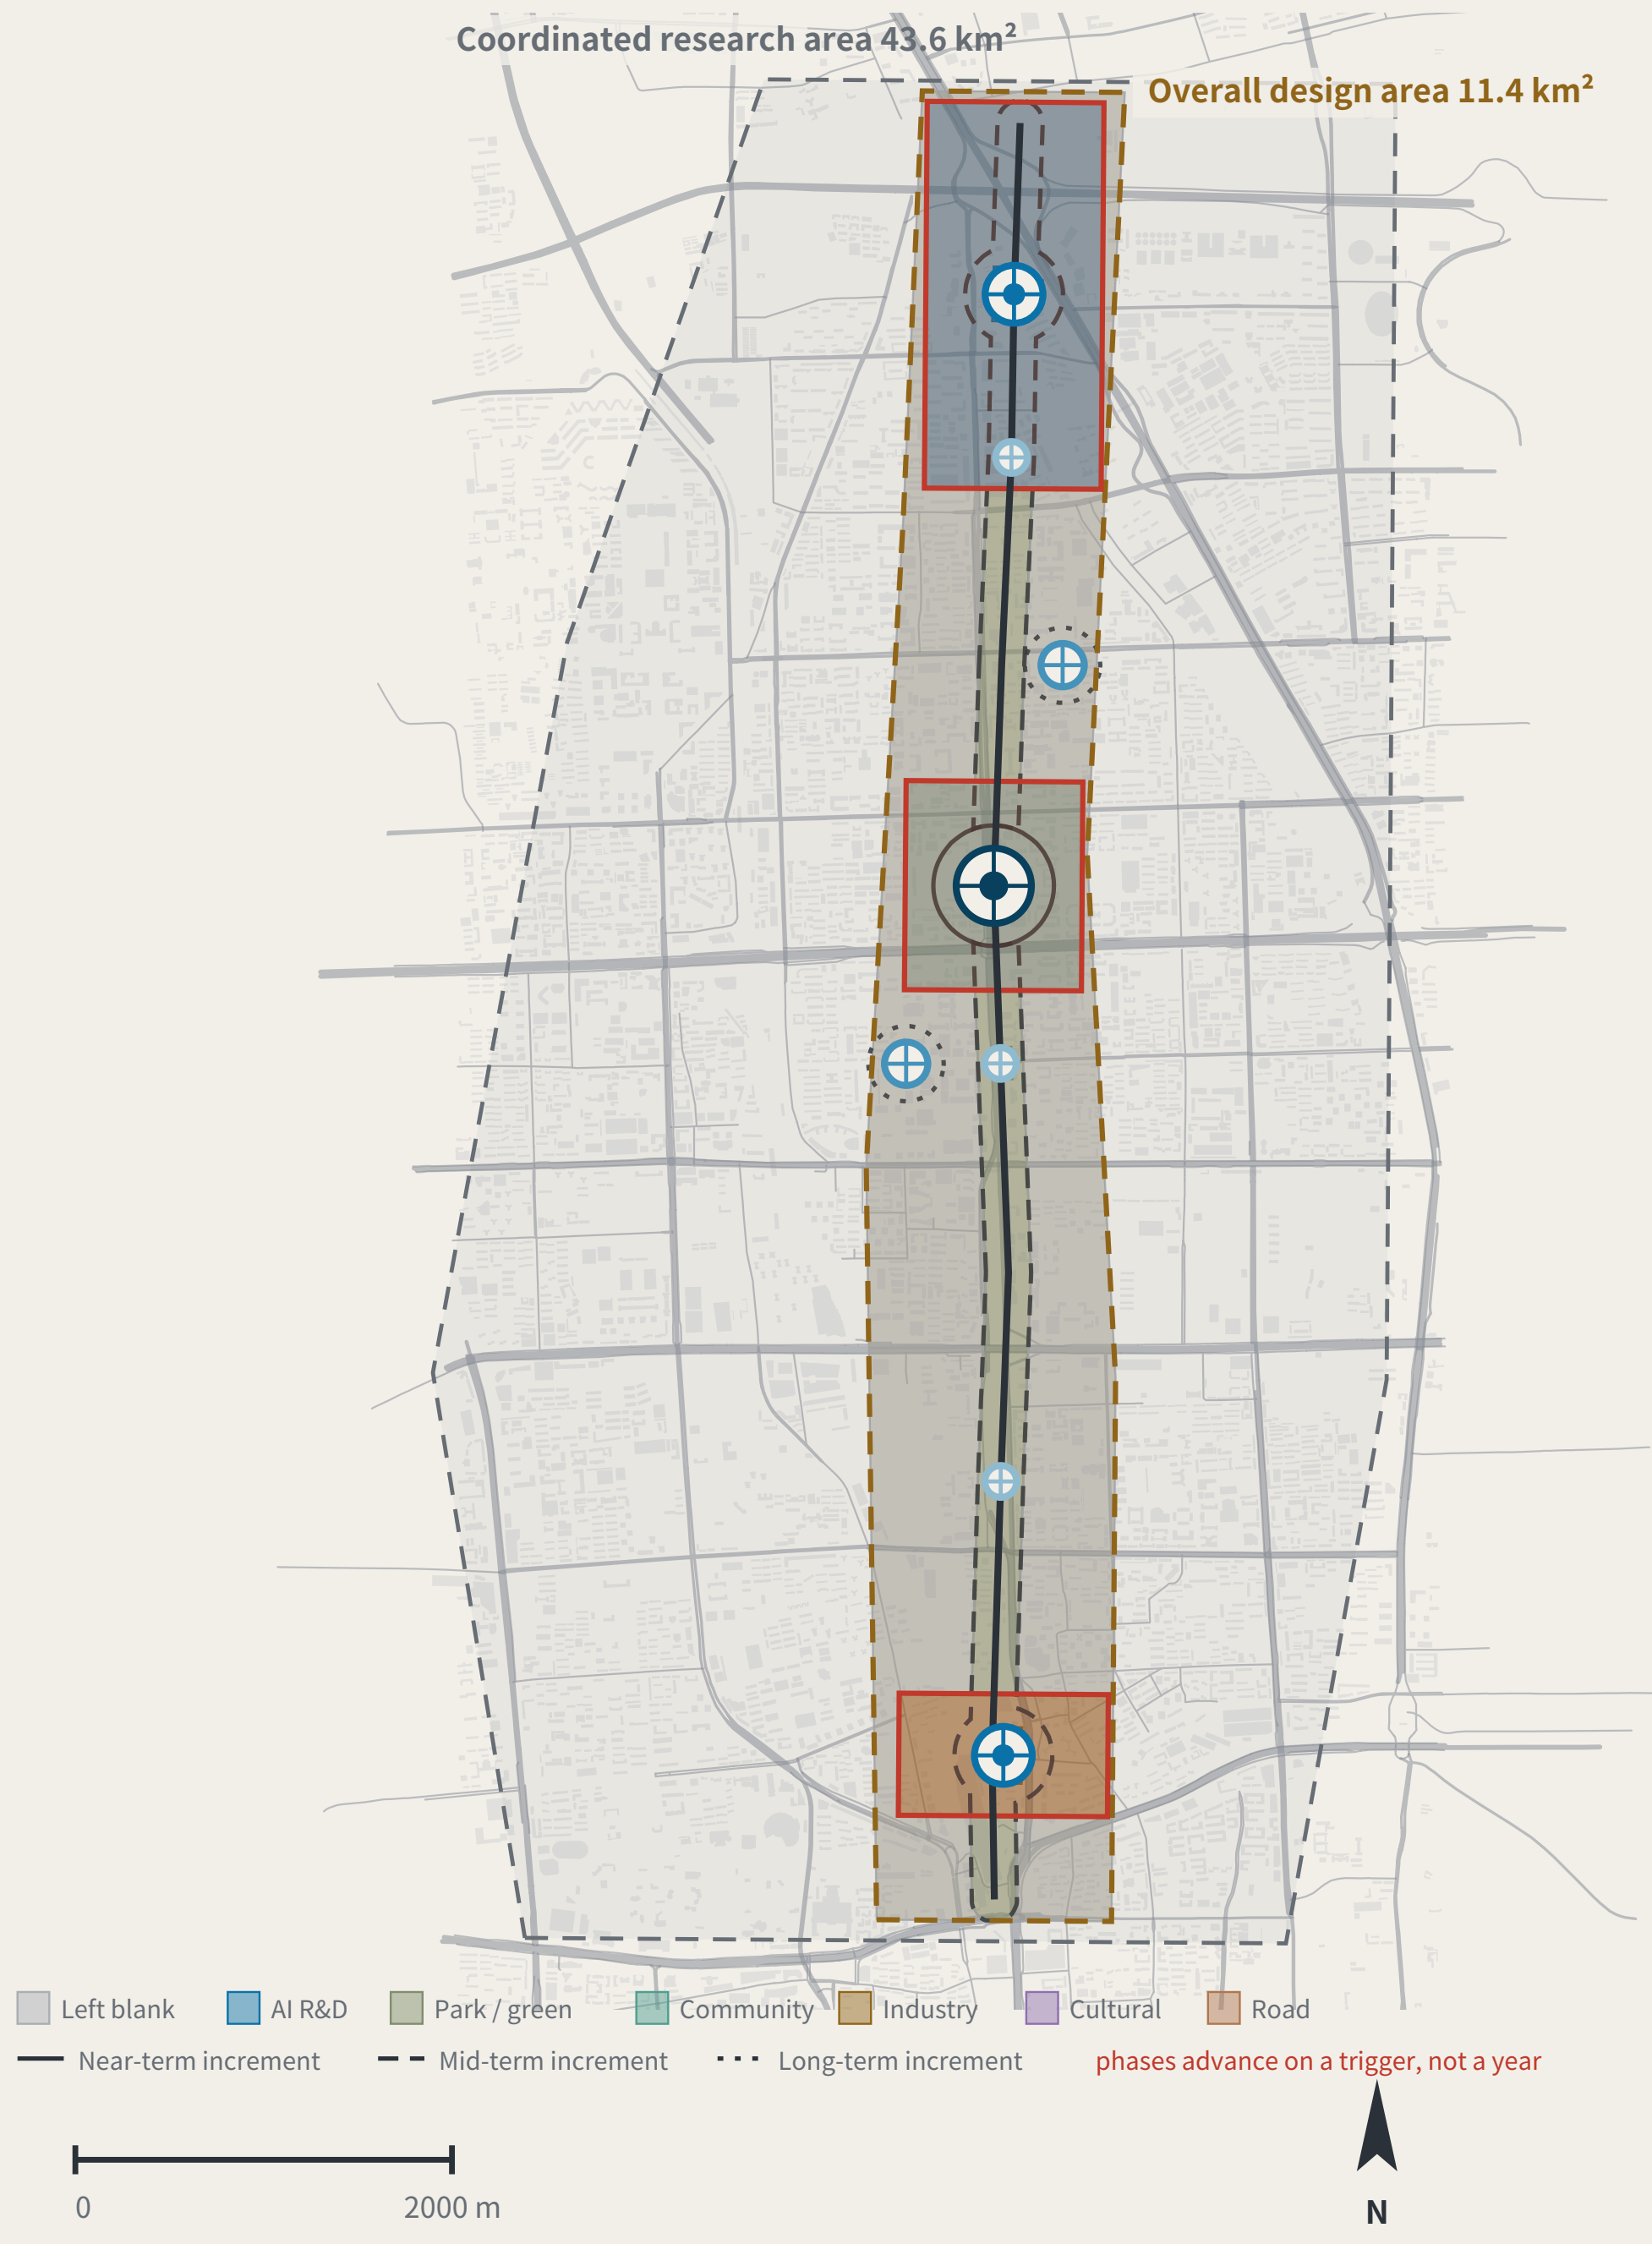

Plan, north up. All boundaries are provisional substitutes; official polygons are unpublished.

Any area, ratio or count that cannot be recomputed from a structured layer is not written as a conclusion.

### THREE SCOPE LEVELS MAPPED ONTO SURVEY ORDERS

SCOPE LEVELS AND NETWORK TIERS

| Announcement level        | Scale                | Network role                                     | Re-survey cadence |
|---------------------------|----------------------|--------------------------------------------------|-------------------|
| Coordinated research area | 43.6 km <sup>2</sup> | Whole-network control                            | Annual            |
| Overall design area       | 11.4 km <sup>2</sup> | First-order route: spine plus two closing routes | Semi-annual       |
| Key areas                 | 368.4 ha             | Origin BM-0 with first-order BM-1 / BM-2         | Quarterly         |

#### The three levels are not three unrelated drawing sets

The research area decides what to measure.

The design area decides which route to measure along.

The key areas decide where to set the stones.

#### Benchmark orders

BENCHMARK ORDERS

|  |                       |                                 |
|--|-----------------------|---------------------------------|
|  | Origin benchmark      | Annual origin and closure check |
|  | First-order benchmark | Annual re-survey                |
|  | 2nd-order point       | Quarterly re-survey             |
|  | 3rd-order point       | Monthly re-survey               |

#### Land-use partition composition

LAND-USE PARTITION

22 features · 7 classes · no overlap, no gap (verified point by point)

|                                       |                   |
|---------------------------------------|-------------------|
| Left blank by this proposal (code 16) | 55.4% · 11 blocks |
| AI R&D and research (0802)            | 16.9% · 2 blocks  |
| Park / green (1401)                   | 12.2% · 1 blocks  |
| Community services and support (0702) | 8.6% · 1 blocks   |
| Industry and commercial services (05) | 6.3% · 2 blocks   |
| Cultural use (0803)                   | 0.6% · 4 blocks   |
| Urban road land (1207)                | 0.1% · 1 blocks   |

Reserved land at 55.4% is a judgement, not a gap: tenure, plan and retain/demolish status are unpublished; this proposal does not subdivide for them.

#### Values this proposal deliberately does not give

Floor area ratio · building height · density · setbacks · road redlines

Statutory regulatory-plan controls. Publishing a figure with the official data absent would manufacture certainty; metrics.json keeps them unknown.

## INNOVATION ECOSYSTEM AND ELEMENT MECHANISMS

FIG.08

### The chain of custody for innovation elements

ELEMENTS AND THEIR CHAIN OF CUSTODY

Every element answers the same three questions: which space carries it, which benchmark holds its reading, and what gets re-measured.

| Element        | Spatial carrier                         | Benchmark            | Re-survey item                                |
|----------------|-----------------------------------------|----------------------|-----------------------------------------------|
| Land and space | → Key-area renewal parcels              | → BM-1 / BM-0 / BM-2 | → Delivery rate of promised space             |
| Compute        | → Consolidated compute nodes            | → BM-1               | → Share of public compute open to application |
| Data           | → Data-factor circulation venue         | → BM-2               | → Authorisation-chain completeness            |
| Scenarios      | → Real-use venues in the two wings      | → BM-21 / BM-22      | → Enforceability of scenario exit             |
| Funding        | → Zhongguancun technology-services wing | → BM-21              | → Deliberately blank — see the note below     |
| Talent         | → Talent district and third places      | → BM-0               | → Re-survey of service satisfaction           |

#### The funding row has no re-survey item. That is a judgement, not an omission.

Investment arrangements are decisions for market actors; an urban design proposal must not turn them into governance metrics, still less into fiscal commitments.

Writing what is not yours to govern into a metric system is its own kind of overreach.

### Six global cases, one question

SIX CASES, ONE QUESTION: WHAT MAKES ITS TRUST RE-MEASURABLE?

| Id | Case                                   | Trust mechanism                                          | Re-measurable | Transferable point                                     |
|----|----------------------------------------|----------------------------------------------------------|---------------|--------------------------------------------------------|
| C1 | Algorithm registers                    | Public register of purpose, data, owner and appeal route | High          | The information base for a benchmark plaque            |
| C2 | Risk-tiered AI legislation             | Duties differentiated by risk class                      | Medium        | Supports the tiered setting of tolerance F             |
| C3 | Standardised testing frameworks        | Comparable reports from a common toolkit                 | High          | Gives re-survey its technical form                     |
| C4 | Algorithmic impact assessment practice | Mandatory ex-ante and ex-post review for high-risk uses  | Med-high      | Supports the strictest tolerance for health scenarios  |
| C5 | Civic data-stewardship practice        | Data use decided by a citizen agenda                     | Medium        | Supports public re-survey rights at third-order points |
| C6 | Open-source reproducibility norms      | Conclusions must ship a re-runnable artifact             | High          | This package ships a runnable verifier                 |

#### All six point at the same gap: they register and they assess, but none institutionalises returning to the origin and computing.

A register says what a system declared; an assessment says what experts think. Neither answers how much the conclusion differs when the same public question passes through different nodes at different times.

Case material is drawn from public institutional documents and public reporting. Mechanisms only are cited: no text or images copied, no marks used, no non-public data, and no fabricated company lists, investment figures or output values. Element-to-space correspondence is in geometry/land\_use.geojson and public\_space.geojson.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used



THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT


The kit of parts, and the overall concept

THE LEVELING LINE

THE LEVELING LINE

A city that publishes its own error.

A city that publishes its own error.

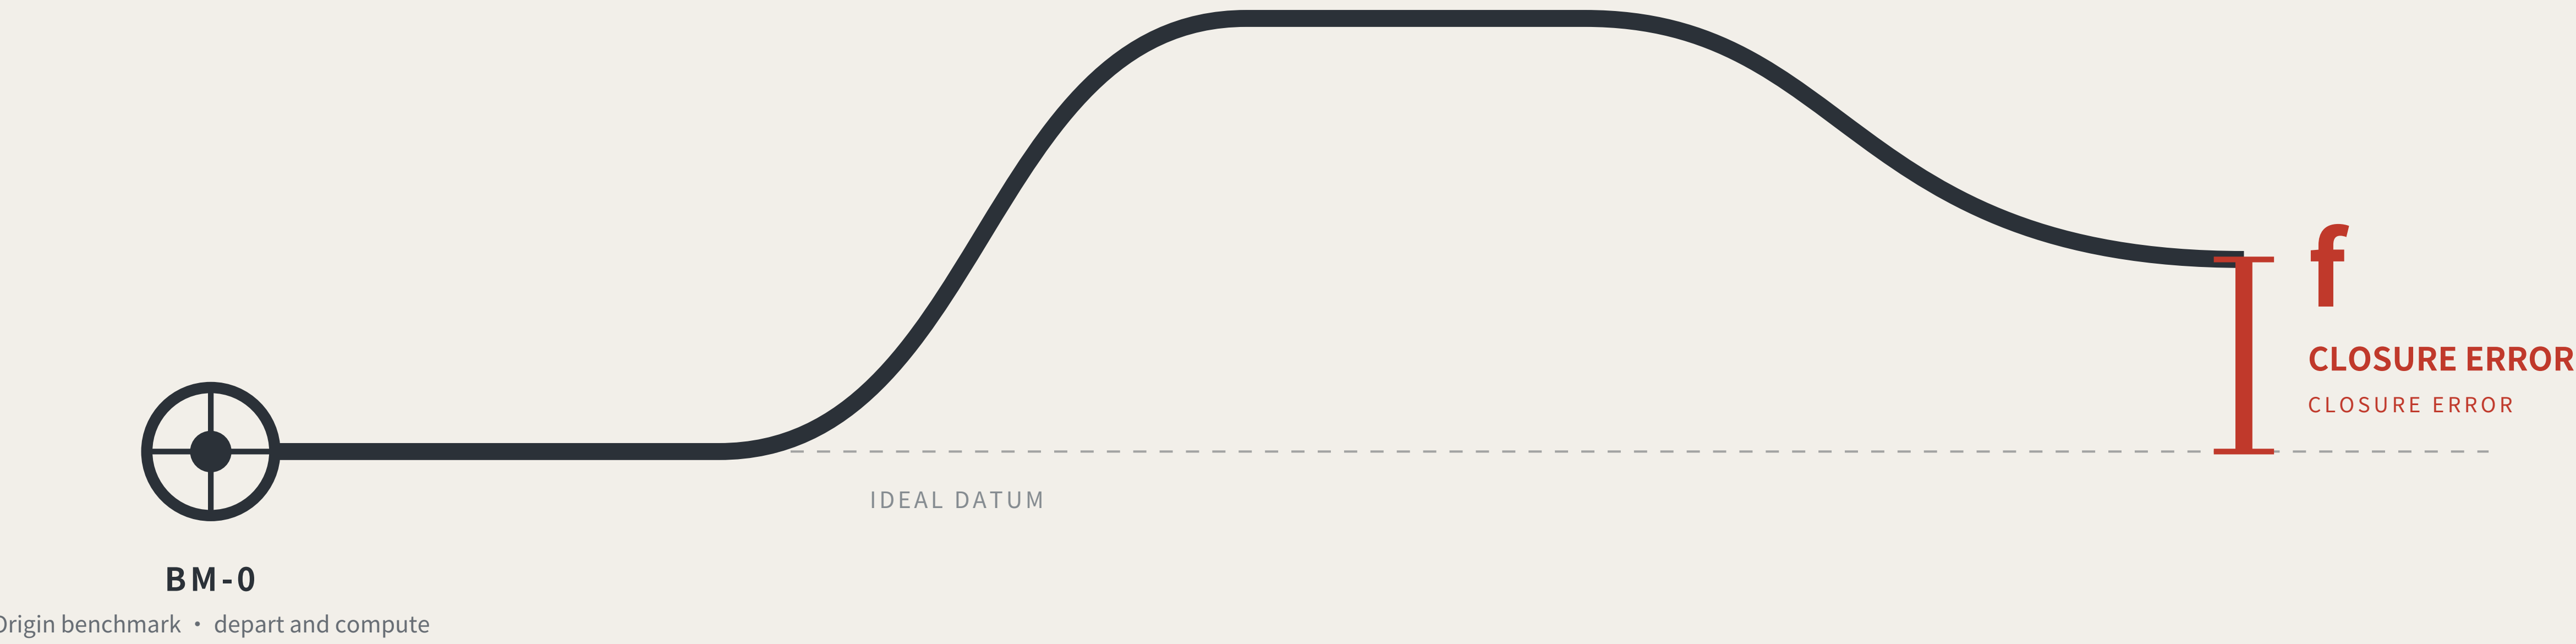


Leveling is not about measuring accurately. It is about measuring back.

Depart from the origin, carry the height station by station, run the circuit and return — the part that does not land back on the datum is the closure error.

Within tolerance every station is accepted; over tolerance the whole run is void and re-measured, and no single station may be patched.

This proposal applies that hundred-year-old rule where a wrong reading injures someone: low-speed robots and AI public services.

OVERALL CONCEPT AND SITE OVERVIEW

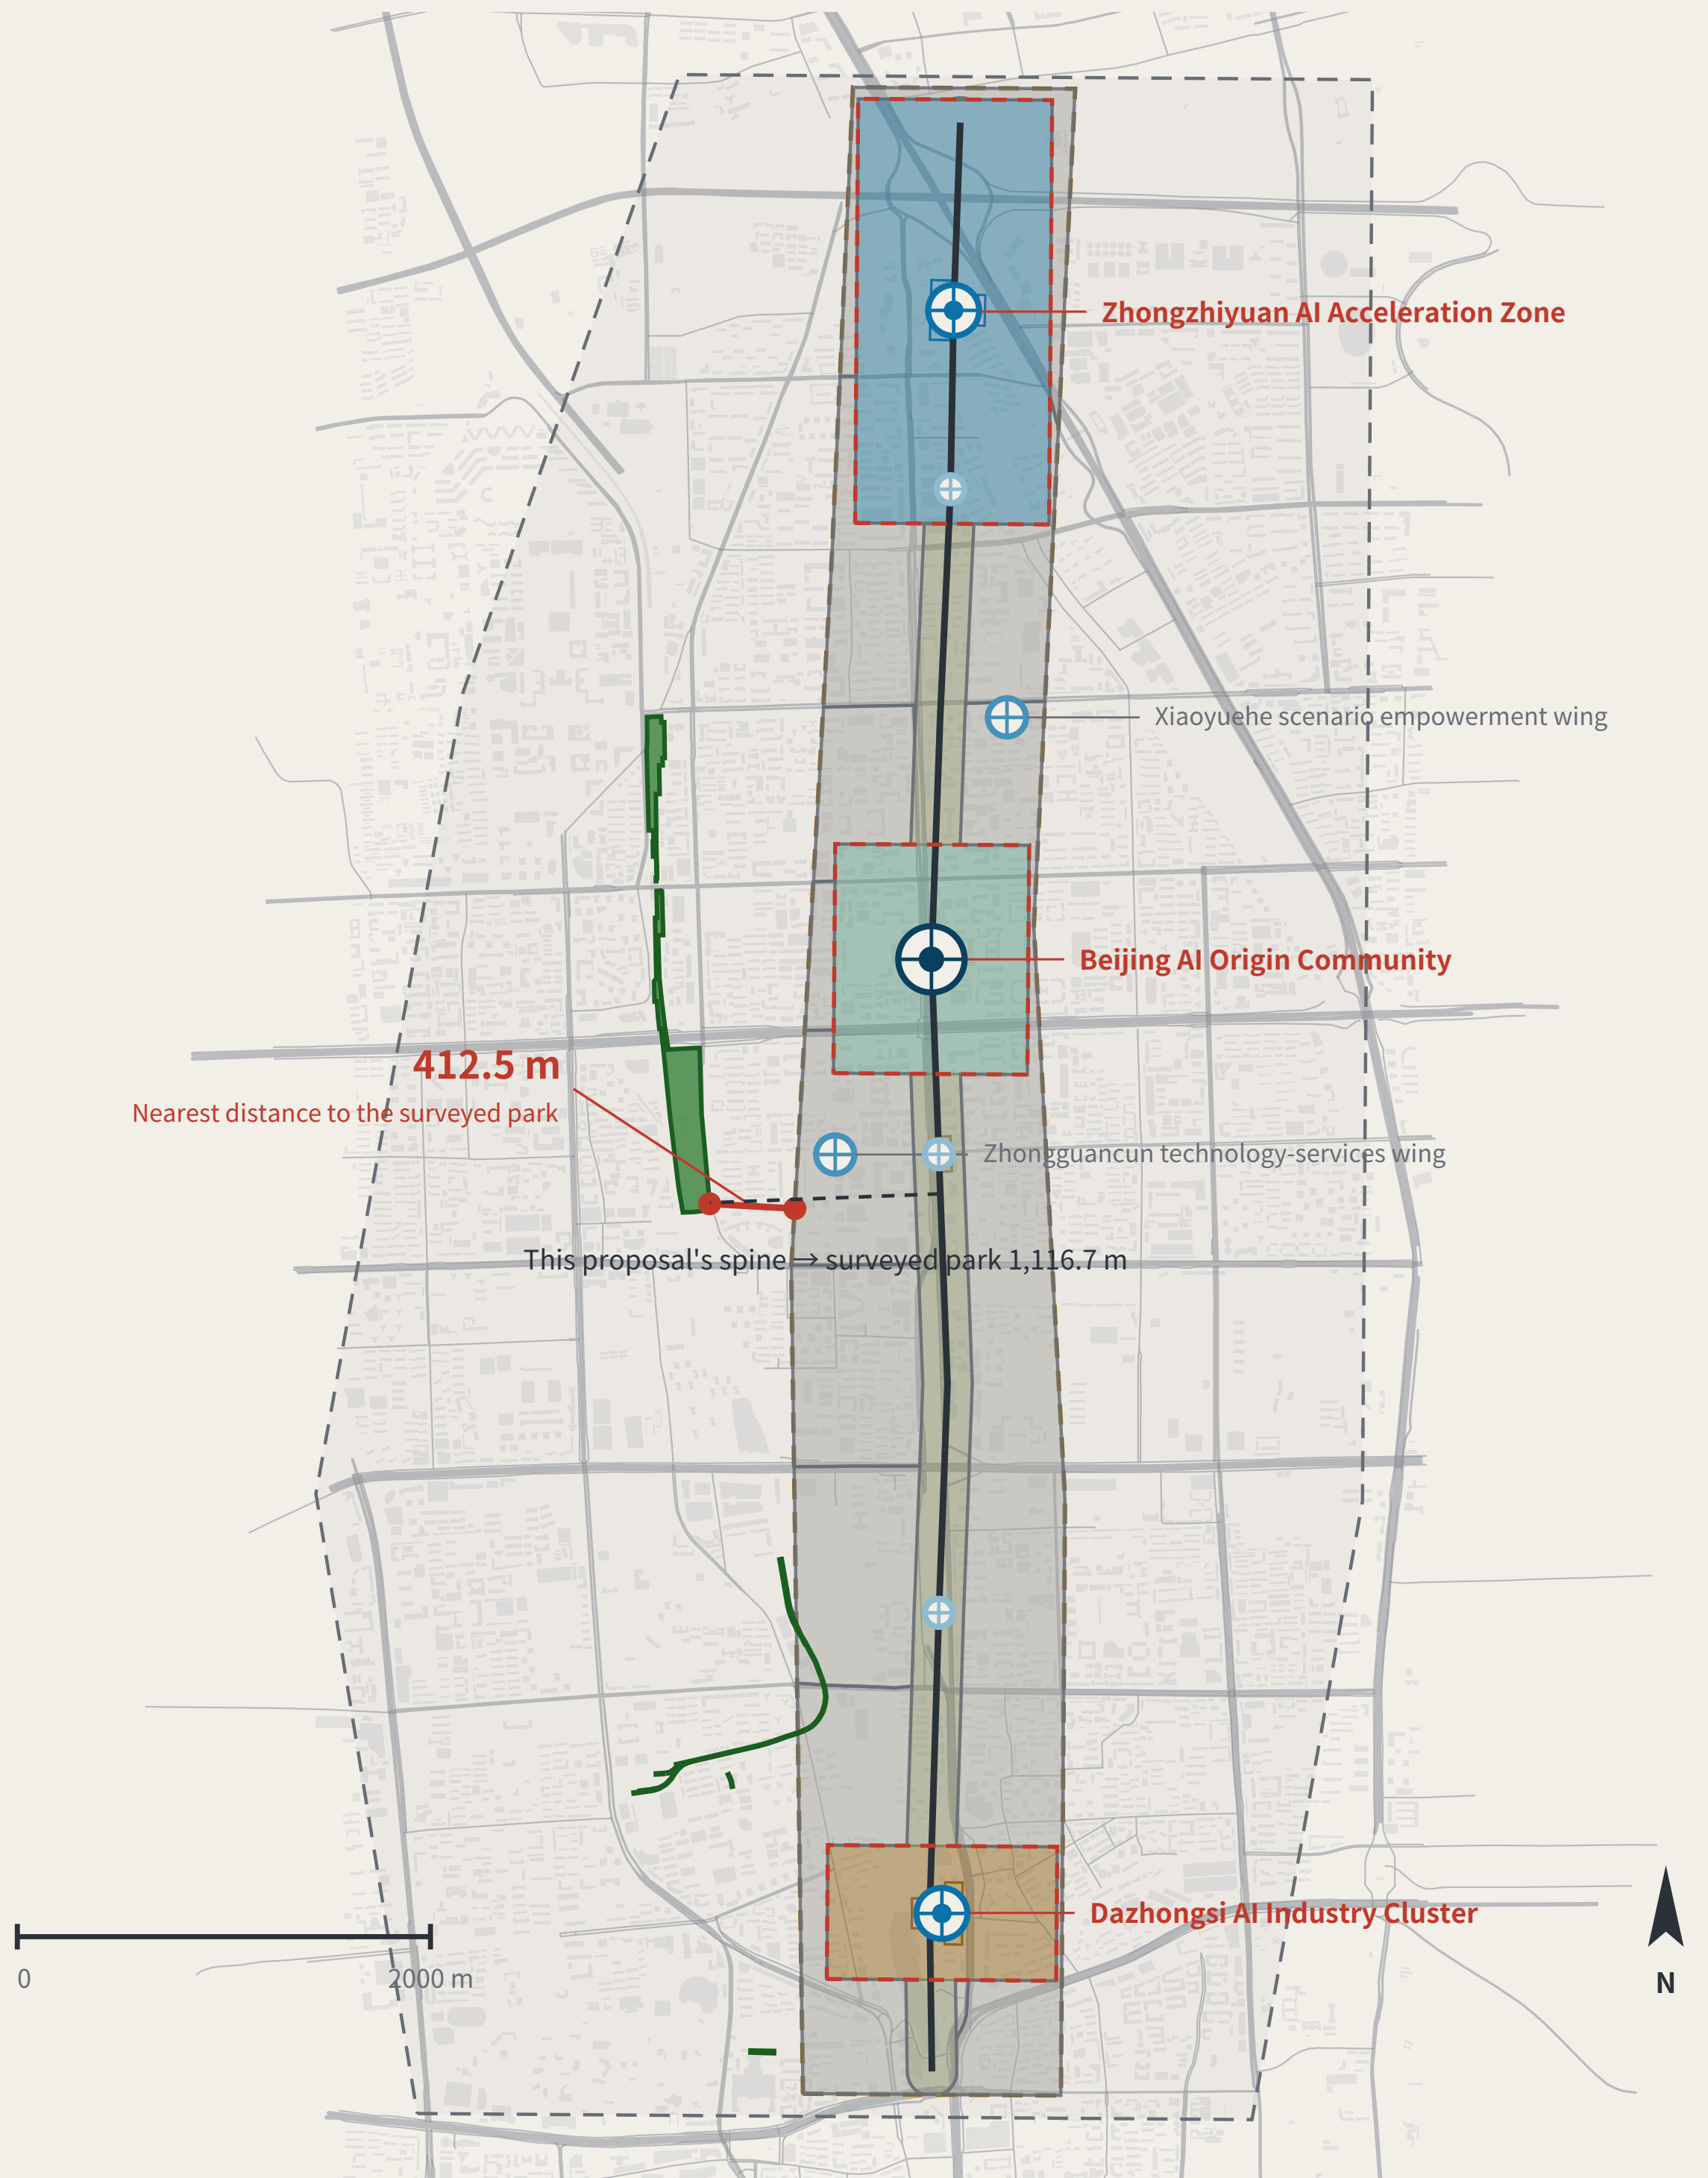

Legend and how to read it

LEGEND • surveyed data and inferred boundaries are shown separately

Surveyed (independently checkable)

- Jing-Zhang Railway Heritage Park (OSM survey, 17.49 ha)
- Disused railway (14 segments, 3,028 m)
- Existing street network (OpenStreetMap, 1,376 ways in this window, expressway to tertiary; local lanes not drawn)
- Existing building footprints (OpenStreetMap, 7,709 in this window)

Inferred (not usable as a redline)

- Coordinated research area 43.6 km<sup>2</sup>
- Overall design area 11.4 km<sup>2</sup>

This proposal's design (generated against inferred boundaries)

Blank-block edges follow the existing arterials; they are not a parcel subdivision or an ownership boundary

- Cultural use (0803)
- AI R&D and research (0802)
- Community services and support (0702)
- Industry and commercial services (05)
- Park / green (1401)
- Urban road land (1207)
- Left blank by this proposal (code 16)
- Spine (design centreline)
- Tiered benchmarks

**The line to read on this sheet is the red one.**  
Research area and surveyed park agree 100%, so the announced bounds do not conflict with actual geography; the discrepancy is confined to the overall design area.  
This proposal's spine is displaced with it. Marked here rather than hidden.

What the belt does

WHAT THE BELT DOES • the five functions are five positions on one loop

| Set the tolerance | Depart                | Take the readings                                      | Close at the origin | Over tolerance: re-survey |
|-------------------|-----------------------|--------------------------------------------------------|---------------------|---------------------------|
| BM-1 Zhongzhiyuan | BM-0 Origin Community | BM-2 Dazhongsi, the wings                              | BM-0                | the whole route returns   |
| 9.4 km            | 11.4 km <sup>2</sup>  | 8                                                      |                     |                           |
| Spine length      | Overall design area   | Tiered benchmarks (origin, first, second, third order) |                     |                           |

**Site cross-check (the red line at left):**  
The surveyed park is 17.49 ha; it agrees 100% with the coordinated research area and intersects the provisional overall design area 0%, nearest distance 412.5 m.  
The same instrument measured this proposal too: the submitted spine is 1116.7 m from the surveyed park, because it was generated against the provisional boundary.  
A recomputability standard invoked only when it flatters the author is not a standard.