
## Product Name Hybrid Stepper Motor MT-1704HSM168RE Made by P.T Approve Martin Date 2/27/2017

E3D SKU: E-MOTOR-NEMA17-48MM

4-M3 Depth 4.5MIN.

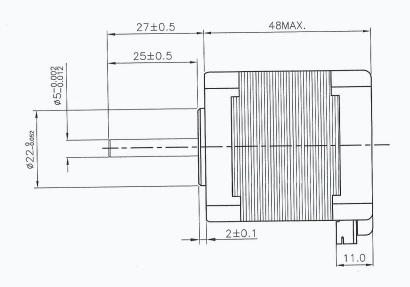

42.3MAX.	_
JST S6B-PH	
	Wiring

42.3MAX.

31±0.1

Items	Specs	Items	Specs
Phase Number	2 phases	Step Angle	0.9°±5%
Rated Voltage	2.8 VDC	Rated Current	DC 1.68 A / Phase
Resistance(20°C)	1.65±10% Ω / phase	Inductance	2.8±20% mH / Phase
Holding Torque	≥ 4.4 Kg-cm(61 Oz.in)	Detent Torque	0.25 Kg-cm REF.
Rotate Direction	ABĀBA CW	MAX Starting PPS	2500 PPS
MAX slewing PPS	2500 PPS	Insulation Resistance	≥100 MΩ(DC 500V)
НІ РОТ	AC600V/1mA/1S	Insulation Class	Class B
Rotor Inertia	68 g.cm²	Weight	0.35 Kg REF.

## Wiring Diagram

