


editi	A1.1
on	201401008460

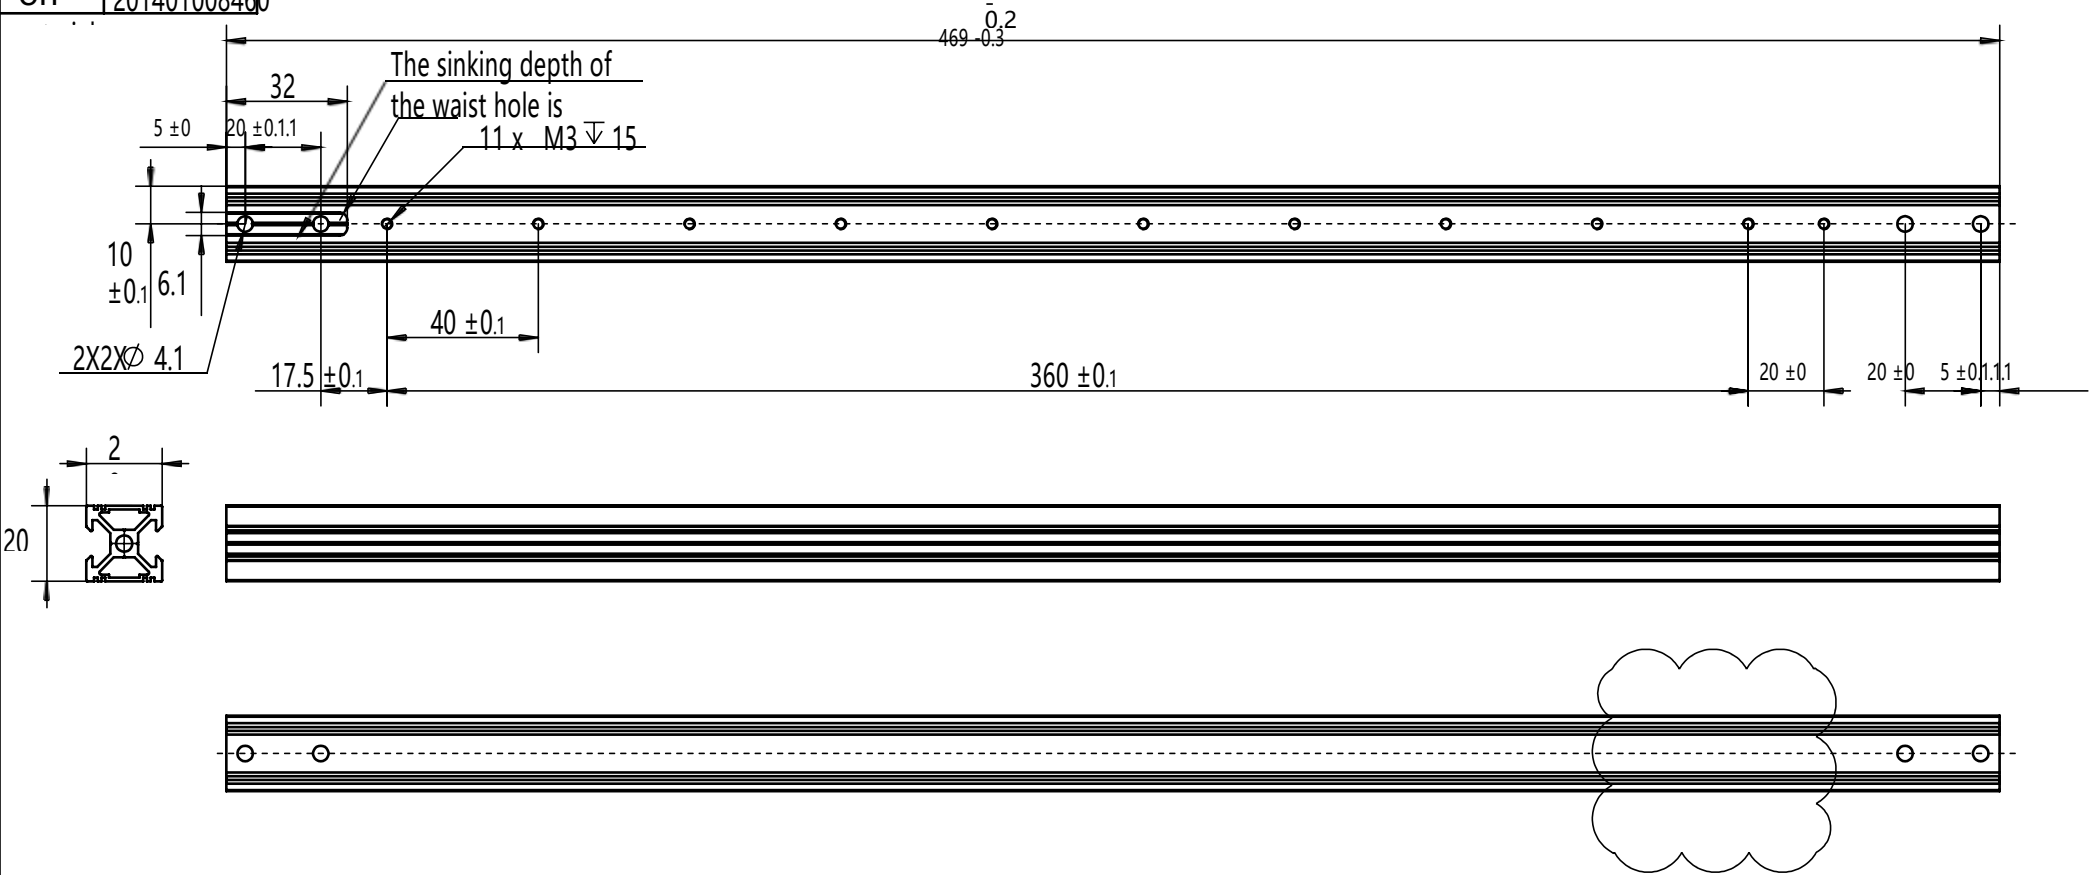

technical requirement:  
Surface treatment: sandblasting oxidation, gray, PANTONE 430C, the sample shall prevail;  
1 . To deburr, the sharp angle is too blunt;  
2 . No note of the chamfer C0.2;  
3 . Drawing for all hole position tolerance dimensions ± 0.1mm;  
4 . Reference to 3D drawing for unannotated dimension;  
5 . The surface to prevent scraping, bumping, crushing, deformation and other bad.

				The linear tolerance is GB / T1804-m; the shape tolerance is GB / T1184-K						desi gn	Wang Enda	2024/3/9	Jie Xinhua Technology Co., LTD				mat erial	6061	
				Linear basic ruler, pole of inch section, limit deviation	> 6~30	> 30~120	> 120~400	> 400~1000	> 1000~2000	> 2000~4000	exami ne and verify							type	SV05P
					±0.2	±0.3	±0.5	±0.8	±1.2	±2									

	A1.1 edi tio n	Revis ed line mark ing	Cancel the thread hole  Change the content	2024.1.31 date	Straight degree peace The surface degree is not noted Toleran ce value	≤10	>	>	>	>	>	y			marking			ntity			numbe r	
						0.05	10~30	30~100	100~300	300~100	1000~30											
							0.1	0.2	0.4	0	0.6			1, the 1				1		1:2	nam e	Side profile