



Version A0

material code 200402008586

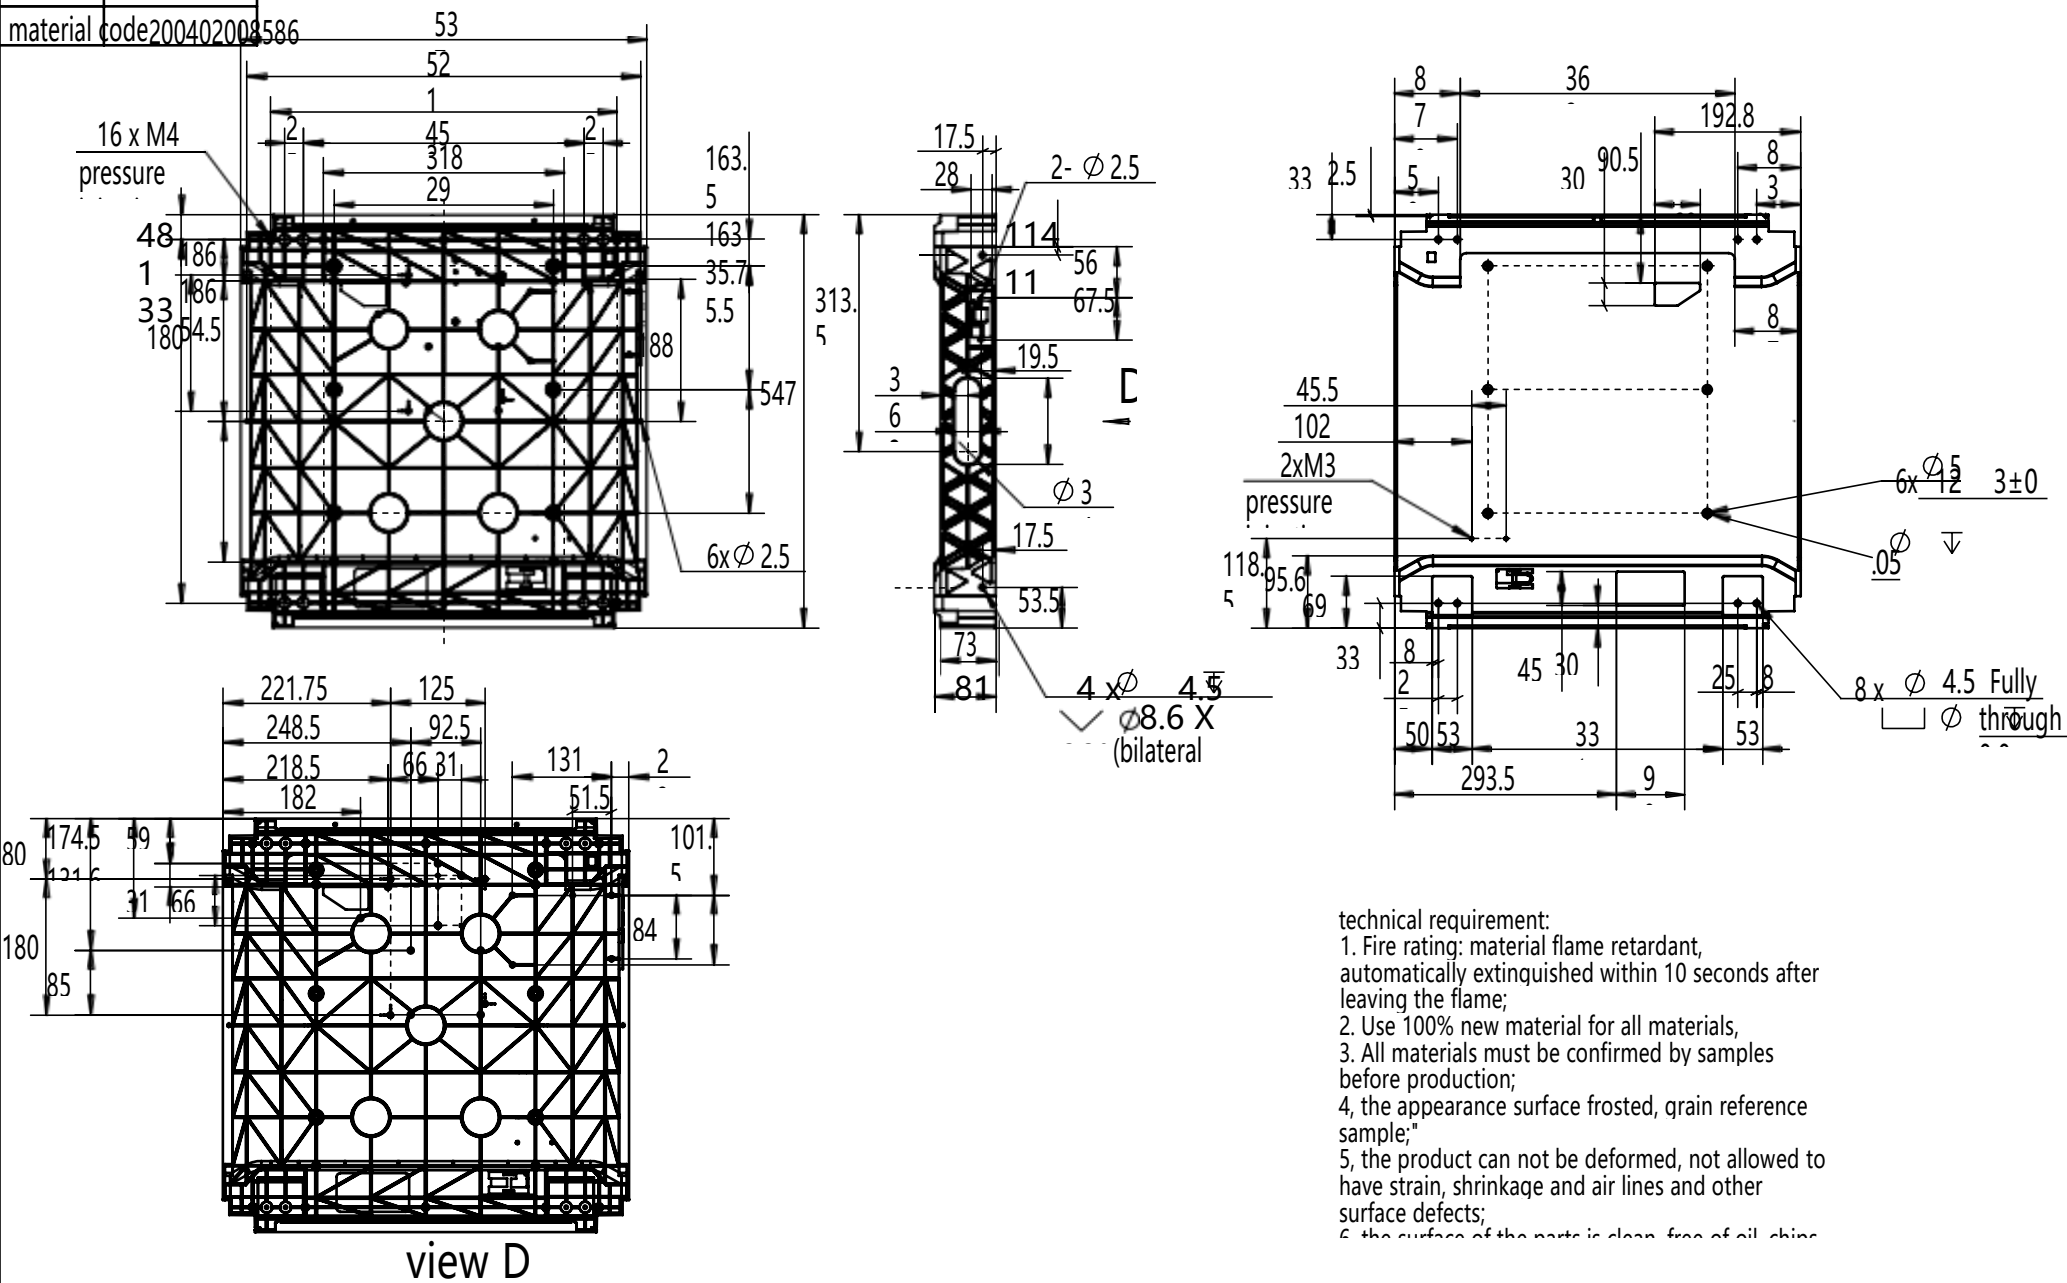

technical requirement:  
1. Fire rating: material flame retardant, automatically extinguished within 10 seconds after leaving the flame;  
2. Use 100% new material for all materials,  
3. All materials must be confirmed by samples before production;  
4. the appearance surface frosted, grain reference sample;"  
5. the product can not be deformed, not allowed to have strain, shrinkage and air lines and other surface defects;  
6. the surface of the parts is clean, free of oil, chips

|  |  |  |  |   |        |          |           |            |             |        |             |           |                                |                    |      |
|--|--|--|--|---|--------|----------|-----------|------------|-------------|--------|-------------|-----------|--------------------------------|--------------------|------|
|  |  |  |  | The linear tolerance is GB / T1804-m; the shape tolerance is GB / T1184-K |        |          |           |            |             | design | Xiao Zeping | 2024/2/27 | Jie Xinhua Technology Co., LTD | material           | ABS  |
|  |  |  |  | Linear basic ruler, pole of inch section, limit deviation                 | > 6~30 | > 30~120 | > 120~400 | > 400~1000 | > 1000~2000 |        |             |           |                                | > 2000~4000        | type |
|  |  |  |  |   | ±0.2   | ±0.3     | ±0.5      | ±0.8       | ±1.2        |        |             | ±2        |                                | examine and verify |      |

|  |      |     |                    |       |  |      |       |        |         |         |         |   |  |          |  |  |               |   |     |      |        |       |                                      |                  |    |     |     |
|--|------|-----|--------------------|-------|--|------|-------|--------|---------|---------|---------|---|--|----------|--|--|---------------|---|-----|------|--------|-------|--------------------------------------|------------------|----|-----|-----|
|  |      |     |                    | value |  |      |       |        |         |         |         | ratify  |  |          |  |  | Stage marking |   |     | qua  | weight | scale | figure                               | JXHSV05P-01001-d |    |     |     |
|  | edi  | tab | Change the content | date  | Straight<br>degree<br>peace<br>The<br>surface<br>degree is<br>not<br>noted<br>Toleran<br>ce<br>value | ≤10  | >     | >      | >       | >       | >       |  |  | 1, the 1 |  |  |               | 1 | 2.1 | 1:10 | nam    | e     | Base integral<br>injection parts (2) |                  |    |     |     |
|  | tion |     |                    |       |  | 0.05 | 10~30 | 30~100 | 100~300 | 300~100 | 1000~30 |   |  |          |  |  |               |   |     |      |        |       |                                      | 0                | 00 | 0.6 | 0.8 |
|  |      |     |                    |       |  |      |       |        |         |         |         |   |  |          |  |  |               |   |     |      |        |       |                                      |                  |    |     |     |