
editio	A1 3
n	
material code	2014010083 89




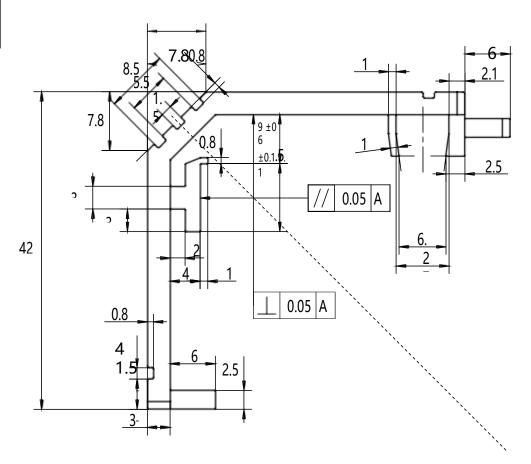

technical requirement:
Surface treatment: sandblasting oxidation, gray, PANTONE 430C, the sample shall prevail;
1. To deburr, the sharp angle is too blunt;
2. No note of the chamfer C0.2;
3. Drawing for all hole position tolerance dimensions ± 0.1mm;
4. Reference to 3D drawing for unannotated dimension;
5. The surface to prevent scraping, bumping, crushing, deformation and other bad.

				The T118		lerance is	GB / T180	4-m; the sl	nape tolerar	nce is GB /	desi gn	Wang Enda	2024/3/29	Jie Xinhua Technology				mat erial	ADC12
A1.3	⊠	1. Modify the size of 2 places;	2024.3.13	basic ruler, pole	>6~30		> 120~400	> 400~100 0	> 1000~20 00	> 2000~40 00	examin e and			Co.,	LTD		•	type	SV05P
A1.2	Δ	1, increase the inverted corner R1,4;	2024.1.30	of inch section, limit	±0.2	±0.3	±0.5	±0.8	±1.2	±2	verify			6.	I				11/41/01/05/01/01/01

ĺ					deviation value										n	narking	g	ntity		numbe	
	A1.1	revisio n bars	1, increase the hole 1,2, increase the 1 threaded hole; 3, increase the chamfer 2; 4, change the hole distance of 185, a total of 2;		Straight degree peace The surface	≤10	> 10~30	> 30~100	> 100~300	> 300~100 0	> 1000~30 00	(1, the 1	1				1	2:1	nam	Z-axis profile 2
	edi tio n	tab	Change the content	date	degree is not noted Tolerance value	0.05	0.1	0.2	0.4	0.6	0.8									е	

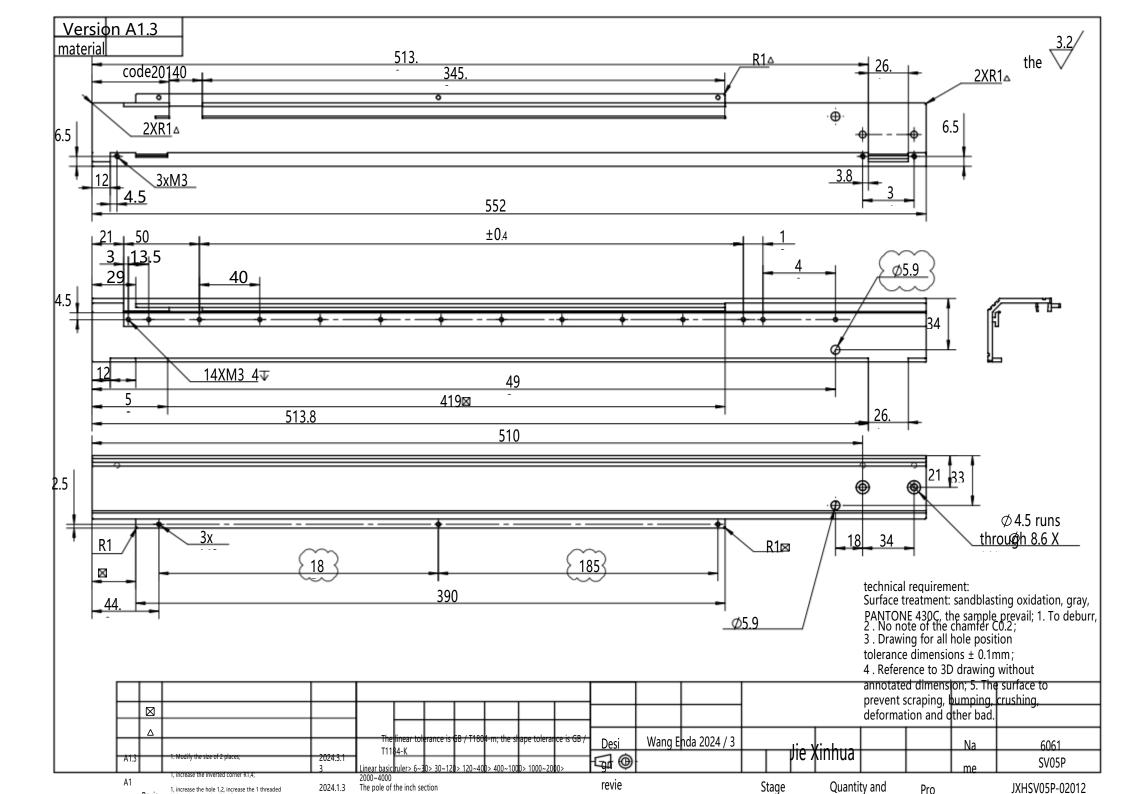

of mat erial dra win g nu

> mb er