


A0 version material
code 200402008610

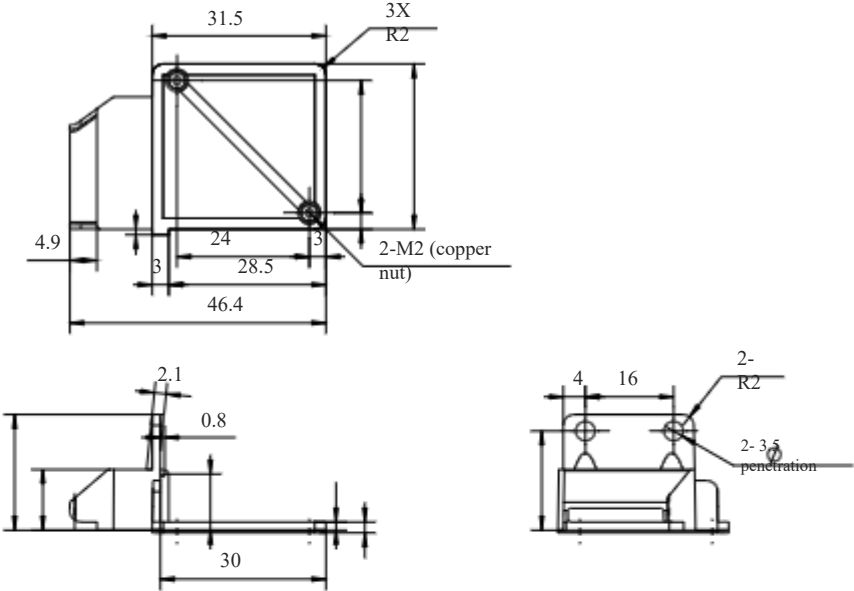


Technical requirements: 1. Fire protection level: The material is flame retardant and will automatically extinguish within 10 seconds after leaving the open flame; 2. All materials use 100% new materials.

3. All materials must be sample confirmed before production; 4. The appearance is frosted, and the texture refers to the sample; "5. The product cannot be deformed, and surface defects such as strains, shrinkage, and air marks are not allowed; 6. The surface of the parts is clean and free of oil stains , chips, dust, etc.

7. The surface is protected from scratches, bumps, bruises, deformation and other defects." 8. Comply with the latest RoHS regulatory requirements; 9. No dimensions are noted, please refer to the 3D drawings;

10. Material color: black;

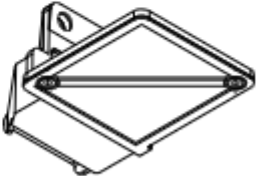

				Linear tolerances are implemented according to GB/T1184 in level; geometric tolerances are implemented according to GB/T1184 K level.							design	Xiao Zepeng	2024/2/24	Jie Xinhua Technology Co., Ltd.				Drawing number	ABS+PC (fireproof)
				Limit deviation values for linear basic size segments	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000		review						model material	SV05P
					±0.2	±0.3	±0.5	±0.8	±1.2	±2		approve							
				Unspecified tolerance values for the straightness and flatness	≤10	> 10 ~ 30	> 30 ~ 100	> 100 ~ 300	> 300 ~ 1000	> 1000 ~ 3000		stage mark		quantity	weight	Proportion	JXHSV05P-06034-d		
Version mark	change content	date			0.05	0.1	0.2	0.4	0.6	0.8		1 in total	Picture 1		1		1:1	name	guide 2