


editi	A0
on	
material code	20020200920




3.2 The rest





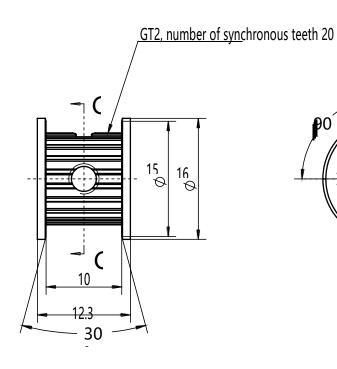

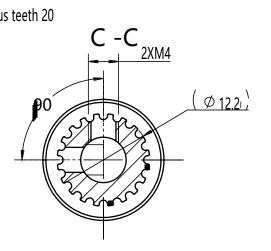

- technical requirement:

 1 . To deburr, the sharp angle is too blunt;

 2 . No note of the chamfer C0.2;

 3 . Drawing for all hole position tolerance dimensions ± 0.1mm;

 4 . Reference to 3D drawing without annotated dimension;

 5 . The surface to prevent scraping, bumping, crushing, deformation and other bad.

		The linear tolerance is GB / T1804-m; the shape tolerance is GB / T1804-m; the shape tolerance is GB / The linear basic ruler> 6~30> 30 120> 120 400> 400 1000> 1000 2000> 2000 4000 inch section. 0	¹¹⁸ Desi an	Wang Enda	2024/3/27	Jie Xinhua Technology	mat erial	6061
		Limit of ± 0 ± 0 ± 0 ± 0 ± 1 ± 2.2.3.5.8.2 Straight degree peace 0 > 10 > 30 > 30~100; 100~300 > 300~1000 > 1000~3000	rovio			Co., LTD	type	JXHSV05P 6mm

edi	edi tab tio n	Change the content	date	Tolerance value of 0.05 0.1 0.2 0.4 0.6 0.8			Stage marking		qua ntity	weight	scale	figure numb	
1 1		J.a. ge ve concer.			1, the 1	1			1	0.0	2:1	er nam e	Z-axis synchronous wheel (GT2-20T-