




Al version of the item code 200402008599	
---	--

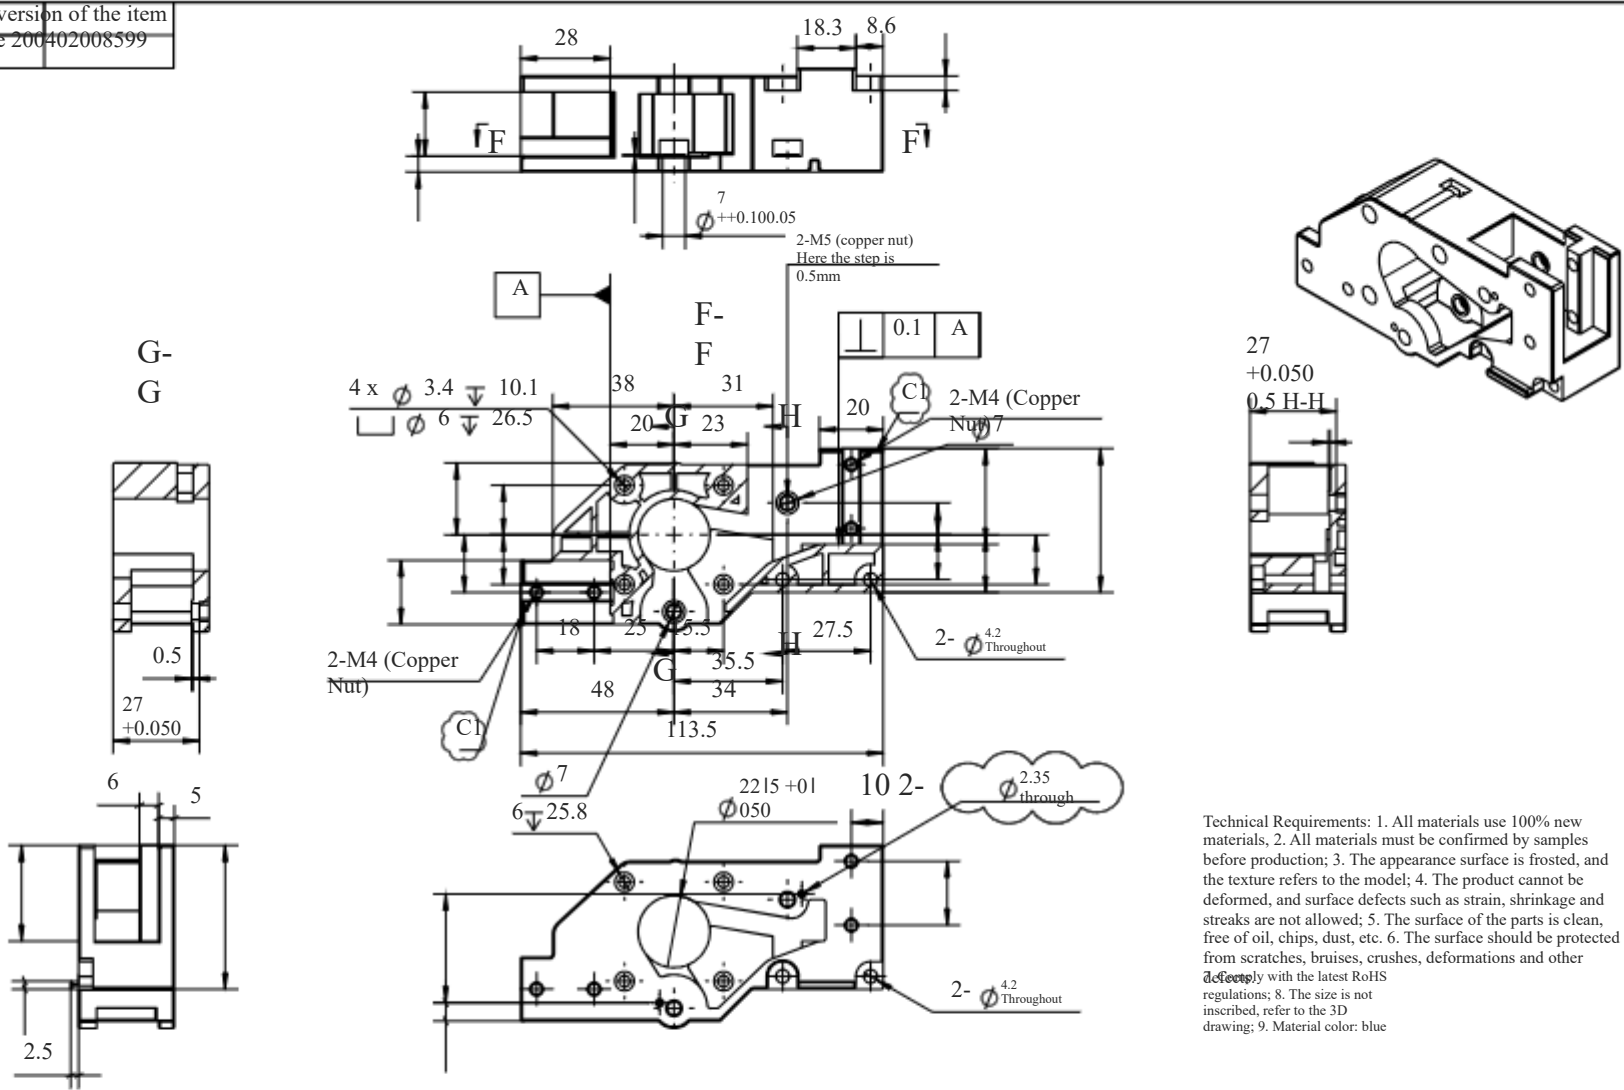

					The linear tolerance is implemented according to GB/T1184-m level, and the geometric tolerance is implemented according to GB/T1184-A level							Design	xiao Zepeng	2024/3/20	Jiexinhua Technology Co., Ltd				Figure No.	Double 6, PA66 + fiberglass
					The value of the extreme deviation of the linear basic size segment	> 6 ~ 30	> 30 ~ 120	> 120	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000	Audit							Model Material	SV05P
						±0.2	±0.3	±0.5	±0.8	±1.2	±2									
A1		1. Add 2 chamfers;2. Modify 2 dimensions		2024.3.19	Unmarked tolerance values for straightness and fitness	≤10	> 10 ~ 30	> 30 ~ 100	> 100 ~ 300	> 300 ~ 1000	> 1000 ~ 3000	Ratiofication				Stage markers	quantity	weight	proportion	JXH505P-03009-D Motor Mount, Left 2
version	mark	where Changed		date		0.05	0.1	0.2	0.4	0.6	0.8		1 in total	Picture 1			1		1:2	name