


A0 version	on material
code 200402009145	

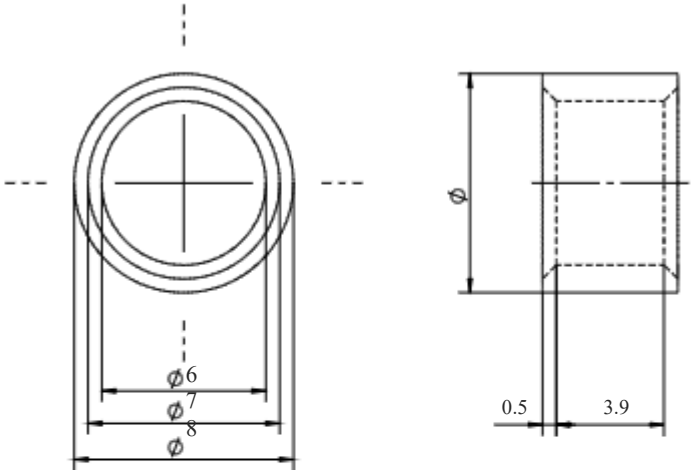

Technical requirements: 1. All materials use 100% new materials. 2. All materials must be sample confirmed before production; 3. The appearance is frosted, and the texture refers to the sample; 4. The product cannot be deformed, and no strains, shrinkage or air marks are allowed, and other surface defects; 5. The surface of the parts is clean and free of oil, chips, dust, etc.6. The surface is protected from scratches, bumps, bruises, deformation and other defects.

7. Comply with the latest RoHS regulatory requirements; 8. No dimensions are noted, please refer to the 3D drawing; 9. Material color: black 10. Fire protection level: The material is flame retardant and will automatically extinguish within 10 seconds after leaving the open flame;

				Linear tolerances are implemented according to GB/T1184 in level; geometric tolerances are implemented according to GB/T1184-K level.				design	Xiao Zepeng	2024/3/13	Jie Xinhua Technology Co., Ltd.				Drawing number	Saigang
				Limit deviation values for linear basic size segments	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000					model	JXHSV05P
					±0.2	±0.3	±0.5	±0.8	±1.2	±2					material	
				Unspecified tolerance values for straightness and flatness	≤10	> 10 ~ 30	> 30 ~ 100	> 100 ~ 300	> 300 ~ 1000	> 1000 ~ 3000					stage	JXHSV05P-
Version	mark	change content	date		0.05	0.1	0.2	0.4	0.6	0.8	stage mark	quantity	weight	Proportion	name	06042-d column
											1 in total	Picture 1		1	0.0	5:1