



A0 version material
code 200402008608

3.2 Rest

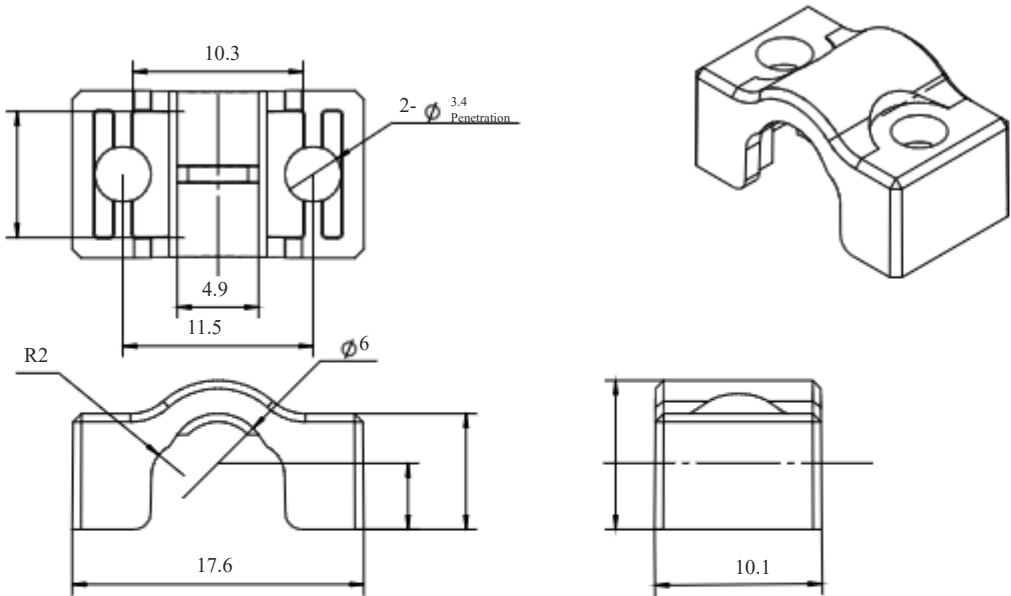

Technical requirements: 1. Fire protection level: The material is flame retardant and will automatically extinguish within 10 seconds after leaving the open flame; 2. All materials use 100% new materials.
3. All materials must be sample confirmed before production; 4. The appearance is frosted, and the texture refers to the sample; "5. The product cannot be deformed, and surface defects such as strains, shrinkage, and air marks are not allowed; 6. The surface of the parts is clean and free of oil stains, chips, dust, etc.
7. The surface is protected from scratches, bumps, bruises, deformation and other defects." 8. Comply with the latest RoHS regulatory requirements; 9. No dimensions are noted, please refer to the 3D drawings;
10. Material color: black;

				Linear tolerances are implemented according to GB/T1184 in level; geometric tolerances are implemented according to GB/T1184-K level.						design	Xiao Zepeng	2024/2/28	Jie Xinhua Technology Co., Ltd.				Drawing number	ABS+PC	
				Limit deviation values for linear basic size segments	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000	review						model	SV05P	
				Unspecified tolerance values for straightness and flatness	±0.2	±0.3	±0.5	±0.8	±1.2	±2	approve				stage mark	quantity	weight	Proportion	JXHSV05P-06031-d
Version mark	change content		date		≤10	> 10 ~ 30	> 30 ~ 100	> 100 ~ 300	> 300 ~ 1000	> 1000 ~ 3000		1 in total	Picture 1			1		3:1	name
					0.05	0.1	0.2	0.4	0.6	0.8									