
	editio	A0
	n	
r	naterial ode	2002020092 08



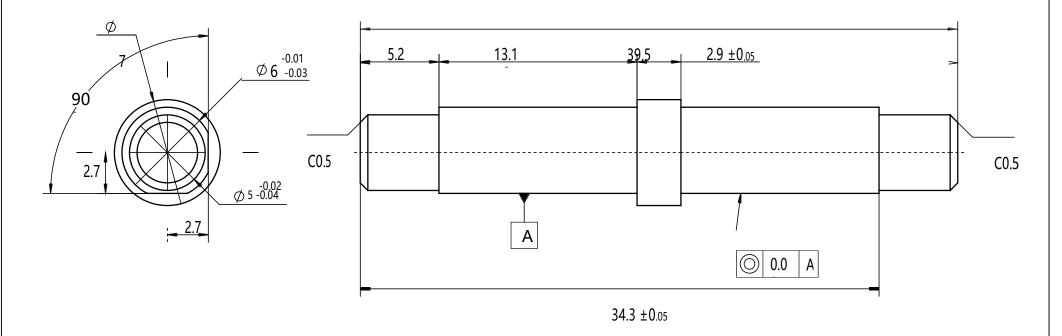

- technical requirement:

 1 . To deburr, the sharp angle is too blunt;

 2 . No note of the chamfer C0.2;

 3 . Drawing for all hole position tolerance dimensions ± 0.1mm;

 4 . Reference to 3D drawing for unannotated dimension;

 5 . The surface to prevent scraping, bumping, crushing, deformation and other bad.

			e linear to 84-K	lerance is	GB / T180	4-m; the sl	hape tolera	nce is GB /	desi an	Wang Enda	2024/3/27	Jie X	Xinhua	mat erial	SUS304		
		Linear basic ruler, pole	r, pole 30~120 120~400 40				> 1000~20 00	> 2000~40 00	examin			Co., LTD			type	JXHSV05P	
		of inch section, limit deviation	±0.2	±0.3	±0.5	±0.8	±1.2	±2	e and verify			C+				· ·	IV/ICV05D 02004 04

1	1	I	1		value		I				l	П			markin	na	ntity		numb	а
					Straight degree	≤10	>	>	>	>	>				markin	9	licity		er	
	edi tio n	tab	Change the content	date	peace The surface degree is not noted Toleran ce value		0.1	0.2	0.4 0.4	0 0 0.6	1000~30 00 0.8		1, the	1			1	4:1	nam e	Synchronous wheel shaft