Notice:

1. The dimensions with "A" in the picture are important inspection items, and the marked dimensional tolerances are all positive tolerances; 2. Load specifications: UL1007 24AWG (8 parallel wire, black); 3. Continuity test: 100% no-open/no-short circuit; Open-circuit, short-circuit, reverse connection, wrong connection, wrong specification, missing connection, damage/poor copper leakage and other defects in appearance; 5. Wiring test: complies with relevant standards such as UL817 "General Safety Requirements for Cord Assemblies and Power Cords" Regulations; 6. Comply with the company's color test standards, and the color difference should be no more than 3 levels; 7. Comply with the latest RoHS regulations and REACH regulations; 8. Comply with the "Administrative Measures for the Restriction of the Use of Hazardous Substances in Electrical and Electronic Products".

The original size is 100mm, changed to 480mm A A1

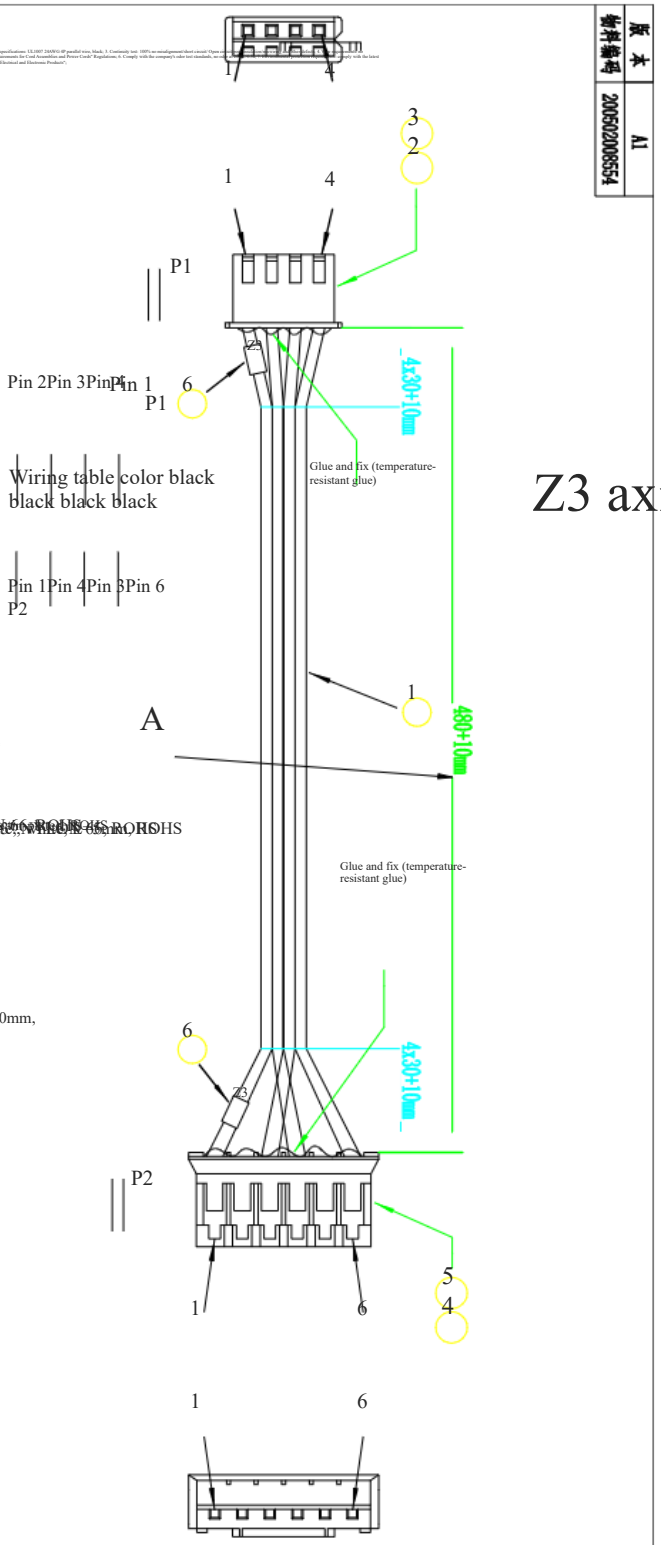

Z3 axis motor line

serial number	1	2	3	4	5	6
describe	Wire	terminal	Plastic shell	terminal	Plastic shell	Digital Tube
model	UL1007 24AWG(0.8A)	XH2.54-2P ROHS	XH2.54-6P ROHS	XH2.54-2P ROHS	XH2.54-6P ROHS	4P parallel wire, black, tinned copper, L=480mm, ROHS
Quantity 480		4	1	4	1	2
unit	mm	PCS	PCS	PCS	PCS	PCS

Picture 1

A stage mark

quantity 1

weight

Proportion 1:1

Drawing number model

material

name Z3 axis motor line

JXHSV05P-08003-g

SV05P

2024/01/24

版本 A1

物料编码 20050200855 4