


editi	Α0
on	
material code	20020200920




3.2 The rest





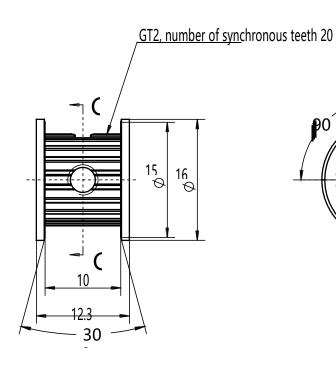



- technical requirement:

 1 . To deburr, the sharp angle is too blunt;

 2 . No note of the chamfer C0.2;

 3 . Drawing for all hole position tolerance dimensions ± 0.1mm;

 4 . Reference to 3D drawing without annotated dimension;

 5 . The surface to prevent scraping, bumping, crushing, deformation and other bad.

		The linear tolerance is GB / T1804-m; the shape tolerance is GB / The linear bisic rulers 6~30> 30 120> 120 400> 400~1000> 1000 2000> 2000~4000 Inch section. 0	¹¹⁸ Desi an	Wang Enda	2024/3/27	Jie Xinhua Technology	mat erial	6061
		Limit of ± 0 ± 0 ± 0 ± 0 ± 1 ± 2.2.3.5.8.2 Straight degree peace (0 > 10 > 30 > 30~100 > 100~300 > 300~1000 > 1000~3000	rovio			Co., LTD	type	JXHSV05P 6mm

edi	tab	Change the content	date	Tolerance value of 0.05 0.1 0.2 0.4 0.6 0.8			Stage marking		qua ntity	weight	scale	figure numb er	
tio n					1, the	I, the 1	1	nam e	Z-axis synchronous wheel (GT2-20T-				