

Version			
mark			
change content			
date			


Technical requirements: 1. Dimensions with "△" in the picture are important inspection items; 2. Dimensional tolerances that are not noted are ±5mm; △3. Specifications: Huaxinong EFC-04D24L 4010 24V double ball bearing 5500r/min 6.3~7.7 CFM 32.6~39.8dB; △4. Terminals should be sheathed with heat-shrinkable tubes; 5. There should be no dirt or damage on the exterior surface, and there should be no broken copper wires inside the conductors; △6. The connectors can withstand 58N/89N without loosening; 7. Wires No damage, no deformation or rust on the terminals; 8. The wire must comply with UL certification; 9. Comply with the company's odor test standards, no odor at 200°C/0.5h; 10. Comply with RoHS (the European market also complies with REACH requirements); 11. Comply with the "Administrative Measures for the Restriction of the Use of Hazardous Substances in Electrical and Electronic Products";

Material coding	Version
Book	
200003008569	
A0	

Unnoted tolerance values for straightness and Roundness: Linear tolerances are implemented according to GB/T1804-m level; geometric tolerances are implemented according to GB/T1184-K level.


0.05	≤10	△4.2	>10~30
0.1	>10~30	△4.3	>30~120
0.2	>30~100	△4.5	>120~400
0.4	>100~300	△4.8	>400~1000
0.6	>300~1000	△1.2	>1000~2000
0.8	>1000~2000	△2	>2000~4000

batch	review	sequence
allow	count	Number
McConnell	trace	Wire
describ	material	
No.	2023/11/24	26AWG(0.08A)
open		

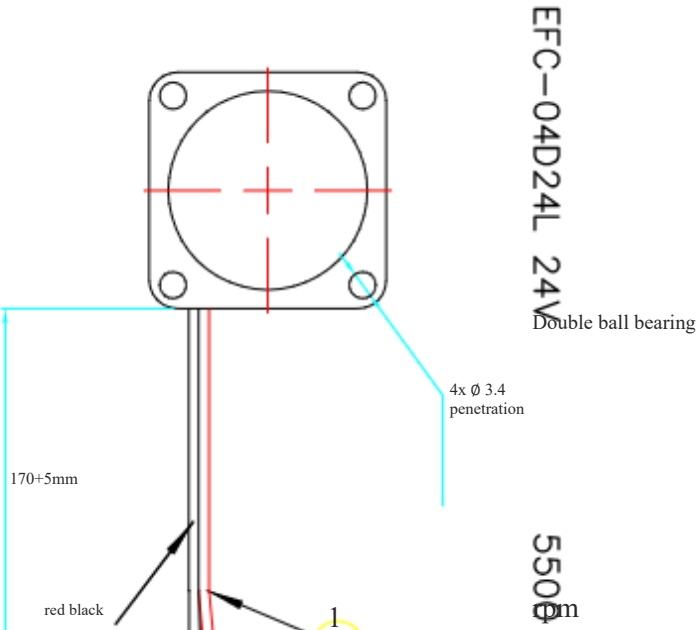

# 4010 axial flow fan

Jie Xinhua Technology Co., Ltd.									
	stage mark								
	quantity								
1									
	weight								
1:1	Proportion								
name	Drawing number	model							
		material							
	JXHSV05P-01008-1								
4010 axial flow fan				quantity					
	SV05P				2				
				Unit	PCS				

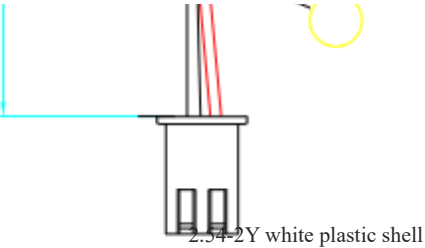

2.54-2Y white plastic shell