Material coding
Version
Book
200603008566
A0

△5. The joint between the wire and the terminal must be firm and reliable, and there shall be no broken copper wires inside the wires;
△6. The wires are not damaged, and the terminals are not deformed or rusty.
(the European market also meets REACH requirements), (8. Comply with the relevant requirements of the European Union and Hong Kong.)
△7. Specifications: Z.00YOU Times

Version
mark
change content
date

ZYT2515H24B

2515 24V double ball bearing 15000r/min 4.3~4.8CFM 32~35.2dB;

Unused tolerance: Non-for roughness and burrs. Linear tolerances are implemented according to GB/T1804-m level; geometric tolerances are implemented according to GB/T1184-K level.

2515 axial flow fan

ZYT2515H24B 24V
Double ball bearing

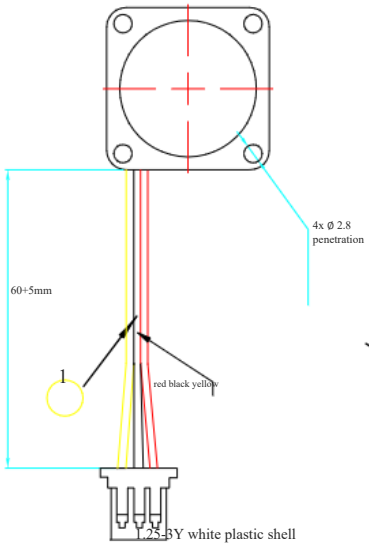

15000r/min

0.05	±0.3	±0.3	±0.4	±0.5	±0.5
0.1	±0.4	±0.3	±0.5	±0.6	±0.6
0.2	±0.5	±0.4	±0.6	±0.8	±0.8
0.4	±0.6	±0.5	±0.8	±1.0	±1.0
0.6	±0.8	±0.6	±1.0	±1.2	±1.2
0.8	±1.0	±0.8	±1.2	±2	±2

batch revision
allow count Number
McConnell trace Wire
describe material
open
No. 2023/11/24 30AWG(0.08A)
open

Jie Xinhua Technology Co., Ltd.
, UL1007

stage mark
quantity
mold
Number
1
weight
Proportion
1:1
name Drawing number model
material
JXHSV05P-06038-f
2515 axial flow fan
SV05P
quantity
3
UnitPCS