



A0 version material  
code 200402008609

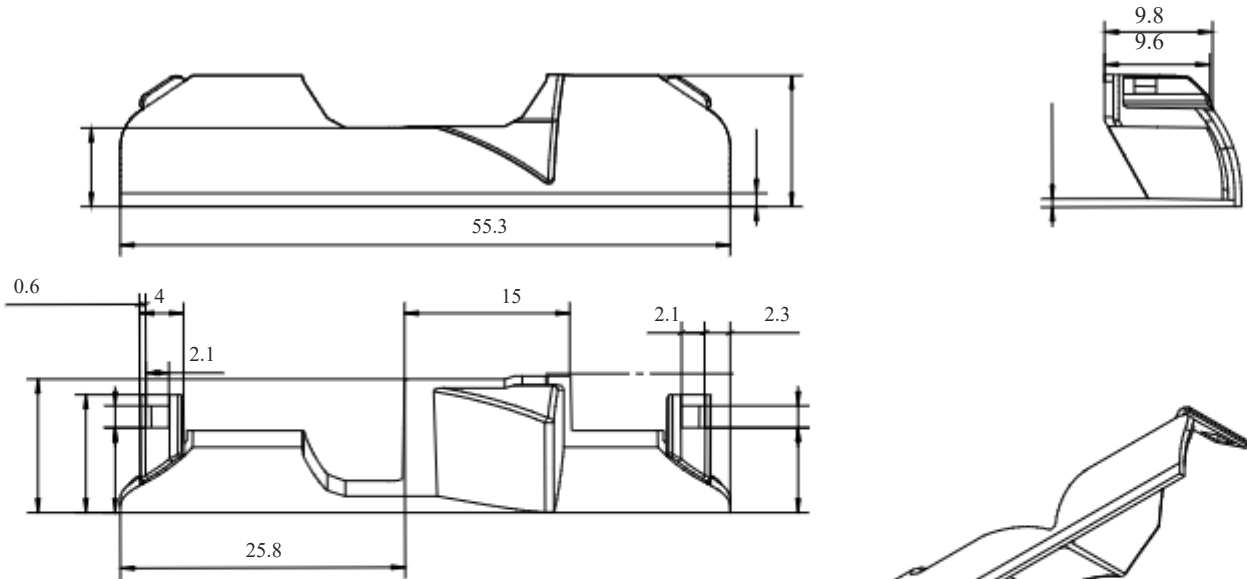

Technical requirements: 1. All materials use 100% new materials. 2. All materials must be sample confirmed before production; 3. The appearance is frosted, and the texture refers to the sample; 4. The product cannot be deformed, and no strains, shrinkage or air marks are allowed, and other surface defects; 5. The surface of the parts is clean and free of oil, chips, dust, etc.6. The surface is protected from scratches, bumps, bruises, deformation and other defects. 7. Comply with the latest RoHS regulatory requirements; 8. No dimensions are noted, please refer to the 3D drawing; 9. Material color: black 10. Fire protection level: The material is flame retardant and will automatically extinguish within 10 seconds after leaving the open flame;

				Linear tolerances are implemented according to GB/T1184 in level; geometric tolerances are implemented according to GB/T1184-K level.						design	Xiao Zepeng	2024/2/28	Jie Xinhua Technology Co., Ltd.				Drawing number	ABS+PC (fireproof)
				Limit deviation values for linear basic size segments	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	> 400 ~ 1000	> 1000 ~ 2000	> 2000 ~ 4000	review					model material	SV05P	
					±0.2	±0.3	±0.5	±0.8	±1.2	±2	approve							
				Unspecified tolerance values for straightness and flatness	≤10	> 10 ~ 30	> 30 ~ 100	> 100 ~ 300	> 300 ~ 1000	> 1000 ~ 3000		stage mark		quantity	weight	Proportion	JXHSV05P-06032-1	
Version mark	change content	date			0.05	0.1	0.2	0.4	0.6	0.8		1 in total	Picture 1			1:1	name	Air guide cover 3