




edition	A0
material code	700400008953



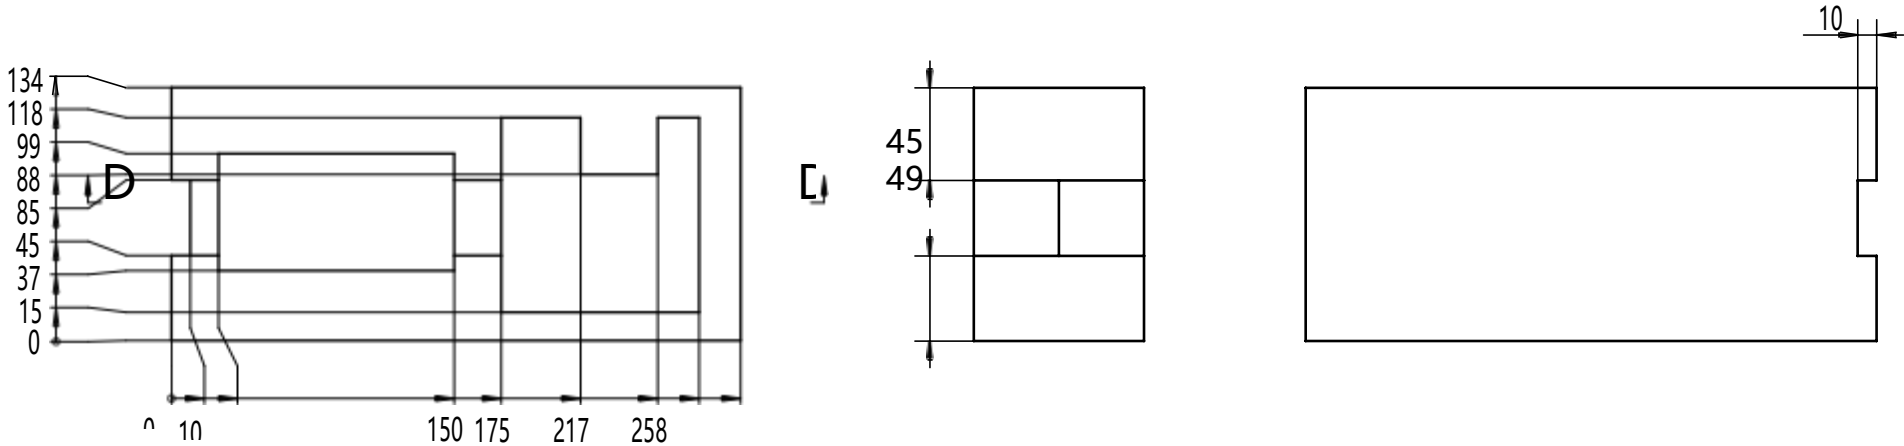

D-D
1 : 4

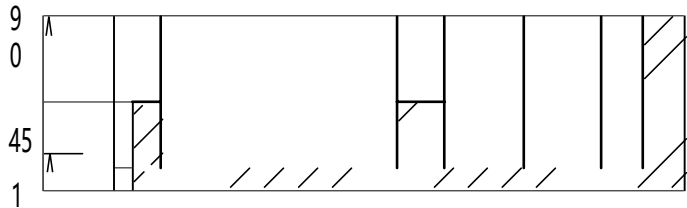

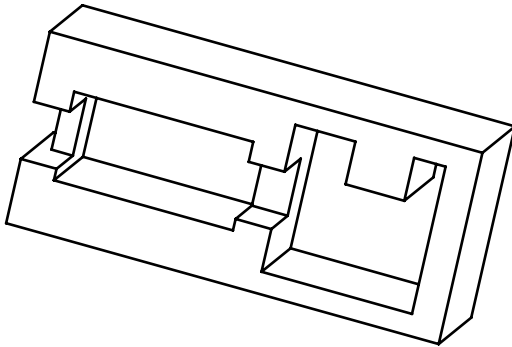Technical requirements: 1. Overall dimensions: 134 * 305 * 90mm, black EPE, 18 Kg / m 3; 2. Fobble bonding is firm, beautiful, and no exposed wire, fault foam bonding surface should be glued with glue.3 . All dimensions are processed according to the drawing, the surface is not dirt, impurities, damage, or margins.4 . Processing error + 5mm; (similar size is negligible) 5. The bottom layer and the penultimate layer must be glued firmly.



				The linear tolerance is GB / T1804-m; the shape tolerance is GB / T1184-K							design	Xiao Zepeng	2024/3/11	Jie Xinhua Technology Co., LTD	material	Pearl foam (black)	
				Linear basic	> 6~30	> 30~120	> 120~400	> 400~1000	> 1000~2000	> 2000~4000	example					type	SV05P

				ruler, pole of inch section, limit deviation value	±0.2	±0.3	±0.5	0	±0.8	±1.2	±2	mine and verif y											
edi tio n	tab	Change the content	date	Straight degree peace The surface degree is not noted Toleran ce value	≤10	>	>	>	>	>	>	ratify			Stage marking			qua ntity	weig ht	scal e	figur e num ber	JXHSV05P- 08106-h	
					0.05	10~30	30~100	100~300	300~100	1000~30	0.1										0.2	0.4	0
													1, the 1						1		1:5	nam e	Spray head foam