
Contents

1	Executive Summary	1
2	Overview	2
2.1	Broader Impact	2
2.2	Personal Motivations	2
2.2.1	Brandon Aulet	2
2.2.2	Timothy Flowers	3
2.2.3	Mark McCulloh	3
2.2.4	Christopher Williams	4
3	Specifications	5
3.1	Goals	5
3.2	Requirements	5
3.2.1	Necessary Features	5
3.2.2	Possible Features	5
4	Research	6
4.1	Camera Research	6
4.1.1	HTC Vive	6
4.1.2	Microsoft Hololens	6
4.1.3	Intel® RealSense™ F200	7
4.1.4	Microsoft Kinect	12
4.1.5	Final Decision	15
4.2	Computer Vision Research	16
4.2.1	Inputs	16
4.2.2	Outputs	16
4.2.3	Training Hardware	17
4.2.4	Computer Vision Terminology Overview	17
4.2.5	Previous Methods	19
4.2.6	Datasets	25
4.2.7	The Object Segmentation Database (OSD)	25

4.2.8	Willow and Challenge Dataset	25
4.3	Unity Game Engine Research	26
4.3.1	Basic Unity	26
4.3.2	Plugin types	28
4.3.3	Version Differences and Pricing	29
4.4	Unreal Engine 4 Research	32
4.4.1	Plugin System	33
5	Detailed Design	35
5.1	Camera Design	35
5.1.1	ICamera Public Members	35
5.1.2	Concurrency	36
5.2	Computer Vision Design	36
5.2.1	Accord.NET Framework	36
5.2.2	Input from Unity Interface	36
5.2.3	Random Forest Implementation	38
5.2.4	RANSAC Implementation	38
5.2.5	Pose Refinement Implementation	38
5.2.6	Output to the Unity Interface	38
5.3	Unity Design	38
5.3.1	Custom Window	39
5.3.2	Object Creator	41
6	Design Summary	42
6.1	Camera Module UML	42
6.1.1	Camera Module Class Diagram	42
6.1.2	Camera Module Activity Diagram	42
6.2	Computer Vision UML	42
6.3	Unity UML	42
6.4	Overview UML	42

7	Development Environment and Operations	42
7.1	IDE	42
7.2	Version Control System	46
7.3	Documentation	46
7.3.1	Markdown	46
7.3.2	Pandoc	47
8	Testing Plan	48
8.1	CameraModule Testing	48
8.1.1	Unit Tests	48
8.2	Computer Vision Testing	49
8.2.1	Benchmark Testing	49
8.2.2	Accord Framework Unit Tests	50
8.2.3	Unit Testing	50
8.3	Unity Testing	52
8.4	Integration Testing	53
9	Budget and Resources Provided by Sponsors	54
9.1	Cameras	54
9.2	Working Area	54
9.3	Expert Consultation	54
10	Challenges	55
10.1	Computer Vision Algorithmic Complexities	55
10.2	Realistic Goals and Requirements	55
10.3	Inexperience with Necessary Tools and Libraries	55
11	Milestones	56
11.0.1	October 2016 - Run and test Bachmann implementation	56
11.0.2	November 2016 - Train Bachmann implementation on ‘Dummy Data’ and test on test set	56
11.0.3	December 2016 - Final Documentation	56
11.0.4	January 2017 - Set up Accord Framework	56
11.0.5	January 2017 - Camera Module Implemented	57

11.0.6	January 2017 - Train Bachmann implementation on real data and test	57
11.0.7	January 2017 - Run Accord Samples	57
11.0.8	January 2017 - Working UI	57
11.0.9	February 2017 - Computer Vision Progress	57
11.0.10	February 2017 - Object Creator	58
11.0.11	March 2017 - Computer Vision System	58
11.0.12	April 2017 - Computer Vision Finalized	58
12	Summary	59
13	Appendices	60

1 Executive Summary

The purpose of our 3D scanner for Unity is to provide a useful and novel tool for the Unity game engine. This application will be free to use for UCF students and potentially added to the Unity Asset Store for use by indie game developers. The only similar application that is currently available is Intel® RealSense™, which does not offer the 3D scene segmentation features to help developers with level creation that we are planning.

The scanner will consist of three major modules, the first of which accepts RGB-D images from sensors, like the Microsoft Kinect, and preprocesses the data to prepare it for the interpreter. The data interpreter uses this data as input for a computer vision system that will run a scene understanding algorithm to detect objects and estimate object poses in 3D space. The last module will take the information gathered from the computer vision system and transfer this into a format that can be ported into Unity. Then this module will render the appropriate models in a Unity scene.

2 Overview

2.1 Broader Impact

What we are creating is more than just a tool to build prototypes of videogame levels. It breaks down many of the barriers of entry to videogame development, softens the learning curve of game design in general, and makes game design accessible to a wider audience. One of the barriers to video game design is the time required to build a game. To build anything of reasonable complexity, a significant investment of time is required to both design the level and then implement it. Our tool aims to consolidate the design and implement stages into a single step. By doing so designs can be quickly evaluated, modified, and reevaluated to arrive at the best course of action in as little time as possible. This significantly lowers the barriers of entry to small game studios and single person teams for creating high quality games. This tool will allow them to develop higher quality games without requiring the resources that large game studios have. Our tool also softens the learning curve for learning how to create videogames. The tool eliminates the need to learn any new skill to design levels. This allows individuals who are interested in learning about game design to complete initial projects faster and more quickly evaluate how they feel about the field of videogame design in general. Finally, our tool makes game design more accessible to those who would otherwise not be able to develop videogames via traditional means. By using blocks to design levels rather than writing code or using a two-dimensional drag and drop interface, people with underdeveloped computer skills can engage in videogame design. This means that young children, elderly, and those lacking finer motor skills would be able to play levels of their own creation.

2.2 Personal Motivations

2.2.1 Brandon Aulet

My initial interest in this project stems from my desire to work in the gaming industry as a software developer. I have been playing videogames and using computers since I was 4 years old. It has had a huge impact on my life, and was the main reason for my decision to choose this project. The further that I have gone in my Computer Science degree, the more opportunities I try to look for to be able to learn about technology that the gaming industry uses. This project gives me a great chance to learn how to manipulate one of the biggest game engines in the market today.

I was also excited by the prospect of getting to work with hardware and computer vision algorithms, things that I have not had much experience with in my time at UCF. This project gives me the opportunity to expand my knowledge in these fields, making it more interesting and overall beneficial for my future in and industry by helping me learn to adapt to different scenarios.

The final reason is that I already had some background in the subject to begin with. In addition to my Computer Science degree I also pursued a Digital Media minor, during that time I learned skills that I believed would help me add to this project such as 3D modeling and a general proficiency in using Unity from a game designer's perspective. That plus the connections I made in my Digital Media classes helped me pick this project as my first choice.

2.2.2 Timothy Flowers

I first became interested in working on this project because of the interest I have had in videogames. Although I have never had a very strong desire to work in the video game industry, I have always enjoyed videogames as someone who plays them. When I began my course work as a Computer Science major, I also began to appreciate them on a technical level. When I saw the pitch for this project I thought it would be a great opportunity to exercise both my passions in videogames as well and technical programming.

Apart from my love for videogames, I've also been heavily interested in graphics. I think the field presents unique programming opportunities and paradigms that are not often encountered in other areas of computer science. These opportunities include the usage of highly parallelized graphics cards as well as the design of shaders which model the behavior of light when it reflects off different surfaces. I felt like this would be a good project to further explore my interest in graphics since there would be opportunity to process three dimensional models as well as write an application that interacts with the Unity game engine.

Finally, I found the initial concept of the tool very exciting. When the implementation is complete, it will allow game designers to eliminate the need to spend so much time prototyping levels. Our tool should give them the ability to test an initial concept and then begin to build on top of it. I get a certain satisfaction at building tools for other people to use because I feel that in a certain way, I'm responsible for what people can create with it. To be able to design something that can help others complete a task much more quickly and efficiently than would otherwise be possible is what software engineers should always strive to do.

2.2.3 Mark McCulloh

Out of all the possible projects the I could choose for senior design, I sought after one that provided an interesting outlet for algorithms related to computer vision whilst also allowing the project to not be especially daunting due to my lack of experience. I know that I will fully invest myself in the project if it is interesting and approachable, regardless of how I feel about my lack of experience. This project fit that bill immediately, but there were even more positives on top of that.

I spend a lot of my leisure time both playing and creating games, so it was natural for me to choose a project that integrates with that culture and helps others in the same field. The love

the idea that I could create a tool that students of game development can use to develop their skills or simply have fun visualizing their creativity. I have a hope that this tool is something that people would actually want to use.

Our project at first seems to lack requirements in a structures way, but there is a large open field of possibilities that we can tap into. I see Senior Design as a way to sharpen my skills as a programmer whilst creating something that I can be proud of, and I consider this project as a way to accomplish the goals set by my outlook.

2.2.4 Christopher Williams

I had previously suggested a Senior Design project similar to this, but utilizing procedural generation techniques. I wanted to assist game developers in level creation by creating procedurally generated assets/levels as a tool for the Unity or Unreal Engine. This project gives the same satisfaction in assisting game developers to increase their efficiency in level prototyping and will allow me to work with the Unity Game Engine as I intended.

I had not considered that my experience with Computer Vision could help with game development and I am excited to apply my experience in this field and learn much more. I am already familiar with resources for potential previous implementations of Computer Vision systems in 3D scene processing and reproduction. I enjoy researching the field of computer vision and hope to write an original implementation for this project alongside Mark.

I have always been enthralled with the game development process and I am excited to have a chance to contribute. My career plans are still an open book at this point in my life and I feel that this project could even open a door to future game development positions. Consisting of both computer vision systems and game development methodologies, this project combines two fields that I am passionate about and I .

3 Specifications

3.1 Goals

Users of Unity will be able to utilize our system turn blocks laid out on a flat surface into untextured unity models, each of which are positioned, scaled, and oriented analogous to their real-life counterparts relative to a current Unity scene. While in Unity, users may initiate a plugin interface to start capturing their proper camera and consequently capture images of the real-life block scene. The untextured objects will appear in the scene when the plugin concludes its execution.

3.2 Requirements

We have divided up the requirements into two categories: Necessary Features and Possible Features. Necessary Features contains what is required for our minimal viable product. Without these, our product is incomplete. Possible Features contains capabilities we would like for our product to have but are not mandatory for the final deliverable.

3.2.1 Necessary Features

1. The system functions on the Windows platform
2. The system is fully invoked enclosed within the Unity platform
3. The system takes data from pictures taken from within the system
4. The system can interpret a single vertical layer of blocks (minimal occlusion) on a flat surface
5. The system analyses RGB-D data to calculate objects' placements and orientations
6. The system uses object data to create and place models into an established Unity scene

3.2.2 Possible Features

1. The system has Linux and OSX compatibility
2. The system can take and analyse RGB or RGB-D data
3. The system can interpret multiple vertical layers of blocks on a flat surface
4. The system will have a similar counterpart to work in the Unreal Engine.

4 Research

The following section contains the entirety of the research we have conducted thus far. It includes our research into all of our camera options, multiple computer vision algorithms for object recognition, and our research into industry standard game engine plugin models and capabilities.

4.1 Camera Research

The UCF Games Research Group had several devices available to us for no charge. These included: Intel® RealSense™ F200, Microsoft HoloLens, HTC Vive, and Microsoft Kinect. The following is an analysis as to the suitability of each of the devices.

4.1.1 HTC Vive

The HTC Vive is a virtual reality headset. Although it does have spatial scanning capabilities, its primary purpose is to immerse the user into another reality. This does not make it an ideal device for this task since it requires visual presence at all times to place the blocks on the scanning surface as well as awareness of the environment to perform the actual scanning of the blocks. The head-mounted nature of the device is not as easy to aim as a hand-held device. The cost of the device also makes it prohibitively expensive which is not congruent with the accessibility that we desired our tool to provide.

4.1.2 Microsoft HoloLens

The Microsoft HoloLens is an augmented reality headset that projects images onto the viewing lens to make it appear as if the images are sharing the same space as the user. Unlike the HTC Vive, Microsoft HoloLens does not remove the user from the environment. This allows the user to stay visually engaged in the environment and move about safely. The HoloLens also has the added ability of being untethered which allows for easy movement independent of the location of the device running the rest of the application. The primary drawbacks to the use of the Microsoft HoloLens are: battery life, cost, and usability. According to our sponsors while in use the battery only lasts for approximately two hours and returning the device to full charge requires approximately five hours. This does not coincide with our desire to create a tool for rapid prototyping. While the untethered design is desirable, it does not justify the sacrifice to be made for battery life. The cost of the device is also prohibitively expensive. It would not be a resource that could be acquired easily by small game studios or individual developers. To maintain the accessibility of our tool a more cost effective device is needed. Finally, we considered the use of a head mounted device impractical for our project. The benefit of allowing the user to capture the spatial data hands free is not significant since the user's hands would have to be cleared from the

workspace before capture could begin. This means that the user cannot perform any actions with their hands while capturing the data. This makes the hands free capability of any head mounted headset insignificant for our project.

4.1.3 Intel® RealSense™ F200

The Intel® RealSense™ F200 camera is a small rectangular camera that could easily be mounted in a variety of settings. The camera provides the ability to obtain both color streams and depth streams. Its SDK includes not only the tools to interface with the device itself, but also prebuilt algorithms for 3D scanning and other computer vision applications. The only drawback to the device is that it must be tethered to the computer via USB. This could make it difficult to capture all the necessary angles for the construction of the Unity scene.

Possible Implementations

There are four choices of implementation for the Camera module of our application. They are C# .NET4, C# Unity, C# UWP, and C++. The C++ implementation provides a native interface for the camera and the other three implementations are wrappers around the C++ implementation. The four different approaches are described and analyzed below.

C# .NET4

This implementation allows for the .NET4 Framework to interface with the Intel® RealSense™ F200 camera. We would create a DLL file that provides access to the data that we wish to retrieve from the camera. This implementation provides the benefit of allowing me to draw on my previous .NET development experience. The implementation provides the benefits of a managed language so no extra time would be spent managing resources. The primary downsides to this approach would be the complexity associated with calling an external DLL from Unity, and the performance loss of using a managed language over a native one. The additional complexity of using an external DLL should be very minor since there are only a few points of interaction between the Unity game engine and the external DLL. The performance loss of using a managed language should not be of a great concern for this application. The application is not performing real time data analysis so the need for the extra performance is not great. The module's primary responsibility is to gather data from the camera and possibly do some light preprocessing. Neither of these tasks are time critical so the need of a native implementation is not necessary.

C# Unity

This implementation allows the camera module to be written directly into a Unity Managed Plugin. One of the benefits of implementing the camera module within the Unity plugin, is the reduction in complexity of the project. There will not be the need for us to generate an external DLL for the camera module and will simplify the structure of the project. Another

benefit to this approach is the automatic memory management that a managed language provides. This reduces the complexity for the programmer, allows for faster development, and is less likely to introduce common errors such as memory leaks into the project.

C# UWP

This implementation allows for the Universal Windows Platform to interface with the Intel® RealSense™ camera. This would involve creating a UWP app that would interface with the camera and then transfer the image data to back to Unity as a saved file. The benefit of creating a UWP application is that the camera module can be run on all variants of Windows 10. This means that the module could run on phones without any code changes if necessary. Since there is no benefit to being able to run the camera application on a phone, the benefits are not useful to our project.

C++

This implementation does not use a wrapper and is a pure native implementation. This gives the advantage of a boost in performance but also means that we must handle our own memory management. This module of the project does require a high level of performance. The camera module is not required to do any real-time data processing and the amount of processing that is done in this module is relatively light. The advantages of a native implementation are not as significant here as they would be in other applications.

Final Decision

For this module, it makes the most sense to use the C# Unity implementation. Since C# is managed, the code required is simpler and less prone to errors being introduced by the programmer. The lack of real-time processing in the camera module also means that the negative performance impacts associated with managed code are reduced. Finally, since the code is incorporated directly into the Unity plugin, the need to call an external DLL is eliminated and will make the deployment and maintenance of the project simpler.

Intel® RealSense™ SDK Overview

The Intel® RealSense™ SDK provides access to the camera as well as access to some computer vision algorithms. Fundamentally the SDK is needed so that we can receive the data from the camera and then pass it along to the computer vision module. All the following information is available from the Intel® RealSense™ SDK [1].

SenseManager

The SenseManager class is the access point for all other modules within the Intel® RealSense™ SDK. An instance of the SenseManager class cannot be created with a constructor but instead is created with a factory pattern using a static method of the SenseManager

class. The primary purpose of the `SenseManager` class is to create `SampleReader` objects, initiate the data pipeline for processing, and to control execution of the pipeline. The exact methods required for these functions in the “Capturing Data” section below.

SampleReader

The `SampleReader` class provides access to a stream of color samples, depth samples, or both. The sample reader is obtained through a member function contained within a `SenseManager` object. The type of data that the `SampleReader` provides is determined by the parameters of a member function call on the `SampleReader` in question. The `SampleReader` provides properties for accessing the sample that the pipeline generates.

Scan3D

The `Scan3D` class provides high level access to the 3D Scanning algorithms. It acts as an interface to the `PreviewImage` property which displays the current captured image, as well as the `Reconstruct` method which builds the three dimensional object from the acquired frames.

Image

The `Image` class provides a means to acquire access to the pixel data of an image as well as the `Image`’s metadata such as height and width. Its primary elements of interest within the `Image` class are the `AcquireAccess` method, `ReleaseAccess` method, and the `Info` property. The `AcquireAccess` method gives the caller a reference to the underlying image data through the use of an `ImageData` object reference. Additional parameters of the `AcquireAccess` method can also be used to convert the format of the pixel data received. The `AcquireAccess` method must be followed by a `ReleaseAccess` method call. The `ReleaseAccess` method allows other callers to acquire access to the image’s data. The `Info` property of the `Image` is also of importance as it contains the height, width, and format of the `Image`.

ImageData

The `ImageData` class is comprised of the actual pixel data. It contains several methods for converting to and from various array types as well as some Unity specific and .NET specific types. The array types are general enough that they can be used to convert to another type of image representation if the need arises.

Important Enumerations

`FileFormat` is used to specify the file type used by `Scan3D` in the `Reconstruct` method. There are three supported file types.

- `OBJ`

-
- PLY
 - STL

ImageAccess is used to as an argument to specify the access permissions when acquiring an ImageData object with AcquireAccess method.

- ACCESS_READ
- ACCESS_WRITE
- ACCESS_READ_WRITE

PixelFormat is used as an argument to specify the format to be returned by the AcquireAccess method. Some of the formats are exclusive to a certain type of data such as color, depth, or infrared. There are several pixel formats.

- PIXEL_FORMAT_YUY2
- PIXEL_FORMAT_NV12
- PIXEL_FORMAT_RGB32
- PIXEL_FORMAT_RGB24
- PIXEL_FORMAT_Y8
- PIXEL_FORMAT_Y8_IR_RELATIVE
- PIXEL_FORMAT_Y16
- PIXEL_FORMAT_DEPTH
- PIXEL_FORMAT_DEPTH_RAW
- PIXEL_FORMAT_DEPTH_F32
- PIXEL_FORMAT_DEPTH_CONFIDENCE

StreamType is used as an argument to specify the type of stream to a SampleReader receives. Some of the stream types are not supported by all Intel® RealSense™ cameras.

- STREAM_TYPE_ANY
- STREAM_TYPE_COLOR
- STREAM_TYPE_DEPTH
- STREAM_TYPE_IR
- STREAM_TYPE_LEFT
- STREAM_TYPE_RIGHT

Capturing Color and Depth Data

The basis of computer vision algorithms is the capture and analysis of depth and color data. In order to begin capturing depth and/or color data, 4 steps have to be executed.

1. Acquire the SenseManager object by calling the static SenseManager.CreateInstance method

-
2. Acquire a `SampleReader` object by calling the static `SampleReader.Activate` method and passing the acquired `SenseManager` as an argument
 3. Call the `EnableStream` method on the acquired `SampleReader` and pass it the type of desired stream
 4. Call the `Init` method on the `SenseManager` with no arguments

Once these steps have been completed it is possible to acquire data from the video pipeline. Acquiring data can be achieved in 3 easy steps

1. Call `AcquireFrame` on the acquired `SenseManager`
2. Retrieve the `Sample Property` from the acquired `SampleReader`
3. Call `ReleaseFrame` on the acquired `SenseManager` when frame processing is complete

The above three steps may be repeated as many times as desired for each frame of data to be captured. Upon completion of data capture. The `Close` method or `Dispose` method must be called on the acquired `SenseManager`. Use `Close` if the `SenseManager` instance will be used to stream data later. Otherwise use `Dispose` to free all resources associated with the instance.

3D Scanning

The Intel® RealSense™ SDK also provides algorithms for scanning 3D objects into common 3D file formats including: OBJ, STL, and PLY. The use of these algorithms is made easy through the Intel® RealSense™ SDK and does not require much more effort than it does to capture raw color and depth. The process is very similar to process detailed in the Capturing Color and Depth Data section above. In order to scan objects the following steps have to be performed.

1. Acquire the `SenseManager` by calling the static `SenseManager.CreateInstance` method
2. Acquire a `Scan3D` object by calling the static `Scan3D.Activate` method and passing the acquired `SenseManager` as an argument
3. Call the `Init` method on the `SenseManager` with no arguments

This initializes the pipeline for constructing a 3D object. Once the pipeline has been initialized the data can begin to be captured. Follow the following steps to capture an image.

1. Call `AcquireFrame` on the acquired `SenseManager`
2. Capture the result of the `Scan3D` object's `PreviewImage` method as an `Image` object
3. Call `ReleaseFrame` on the acquired `SenseManager` in order to capture the next frame

The above three steps may be repeated as many times as desired for each frame of data to be captured. After all desired frames have been captured. The `Reconstruct` method can be called which will save the object with the specified file format and file location. Upon completion of data capture and exporting the data to a file, the `Close` method or `Dispose` method must be called on the acquired `SenseManager`. Use `Close` if the `SenseManager` instance will be used to stream data later. Otherwise use `Dispose` to free all resources associated with the instance.

Dispose Method

Although C# is a managed language there are some classes in the Intel® RealSense™ SDK that do not benefit from automatic garbage collection. These objects include the `SenseManager` class and the `Image` class. In order for the object to be processed by the garbage collector, the `Dispose` method must be called. In order to ensure that the `Dispose` is called, it is wise to place the method call inside of a class destructor or to initialize the `SenseManager` in a `using` block.

4.1.4 Microsoft Kinect

The Microsoft Kinect is a rectangular sensor that can provide both depth and color data. Much like the Intel® RealSense™ F200 camera, its SDK also includes prebuilt computer vision algorithms in addition to the standard camera interface functionality. It also shares the disadvantage of needing to be tethered via USB to the main computing device. The current mode of the Microsoft Kinect sensor has the additional disadvantage of needing an adapter for use with a laptop. This increases the cost of the device as well as marginally increasing the complexity of the set up for the user.

Possible Implementations

The Microsoft Kinect API provides three different types of APIs. It provides APIs for the Windows Runtime, .NET Framework, and Native APIs. All three APIs use similar naming conventions and therefore skills learned with one API should be able to easily transfer to another. The advantages, disadvantages, and types of applications that can be written with these APIs are detailed below.

Windows Runtime

The Windows Runtime APIs allow Windows Store Apps that interface with the Microsoft Kinect to be written. These APIs can be accessed by any language that supports the Windows Runtime including C# and Visual Basic. The APIs are managed which allow for automatic garbage collection and memory allocation. Since Windows Store apps have to be distributed through the Windows Store, we are not interested in this implementation. We want to be able to package and distribute our plugin together so having to download one component from the store and another component from another location is not ideal. We

would also have to communicate the data captured by the Microsoft Kinect to the game engine using a localhost loopback or saved file.

.NET Framework

The .NET Framework APIs allow WPF applications to interface with the Microsoft Kinect. WPF applications are also managed so they carry the same garbage collection and memory allocation benefits as mentioned in the Windows Runtime APIs. WPF also supports both C# and Visual Basic. Unlike Windows Runtime applications, WPF applications can be distributed easily outside of a storefront. We would still likely have to use the same method to transfer data to the game engine.

Native APIs

The Native APIs differ from the previous two implementations in that they do not include garbage collection or memory allocation. Both of these functions have to be explicitly handled by the programmer using the APIs. This can slow down implementation since extra code has to be written. It would also require additional diligence during testing to ensure that there are no memory leaks. The benefit to using the native implementation is additional performance but the majority of our computation time is likely to be invested in the computer vision algorithms and processing and not the data capture itself.

Microsoft Kinect SDK Overview

The following is a brief description of classes from the SDK as they would be useful to our project. All the information is available in the Microsoft Kinect SDK Documentation in Appendix B.

KinectSensor

The KinectSensor class is used as the primary interface to the Microsoft Kinect. The KinectSensor adopts a singleton pattern by using a static method to return an instance of the KinectSensor class. Once an instance has been obtained all other access to the sensor is handled through the instance.

DepthFrameSource

The DepthFrameSource class gives access to DepthFrameReader objects through a simple OpenReader method. Also includes properties representing the reliable distances that the Microsoft Kinect can read data.

DepthFrameReader

The `DepthFrameReader` class is used to capture `DepthFrame` objects which represent actual data. The frames can be captured by subscribing an event handler to the `FrameArrived` member event or by making a call to the `AcquireLatestFrame` method.

DepthFrame

The `DepthFrame` class represents a single moment of depth data capture. The data is represented as an image where the pixels represent the distance of the given pixel area from the camera. It provides methods for accessing the underlying pixel data in both buffer and array forms.

ColorFrameSource

The `ColorFrameSource` class gives access to `ColorFrameReader` objects through a simple `OpenReader` method. Also includes properties representing the reliable distances that the Microsoft Kinect can read data.

ColorFrameReader

The `ColorFrameReader` class is used to capture `ColorFrame` objects which represent actual data. The frames can be captured by subscribing an event handler to the `FrameArrived` member event or by making a call to the `AcquireLatestFrame` method.

ColorFrame

The `ColorFrame` class represents a single moment of color data capture. The data is represented as an image where the pixels represent the color of the given pixel area as recorded by the camera. It provides methods for accessing the underlying pixel data as either a buffer or an array.

Capturing Color and Depth Data

The following steps should be followed in order to initialize the Microsoft Kinect camera sensor for data collection.

1. Acquire an instance of the `KinectSensor` class by calling `KinectSensor.GetDefault()`
2. Call the `Open()` member method on the acquired `KinectSensor` object
3. Call the `OpenReader()` member method on the acquired `KinectSensor` object's `ColorFrameSource` property to acquire a `ColorFrameReader`
4. Call the `OpenReader()` member method on the acquired `KinectSensor` object's `DepthFrameSource` property to acquire a `DepthFrameReader`

Once the previous steps have been completed the data can begin to be captured from the sensor. Perform the following steps in order to acquire color and depth data.

1. Call the `AcquireLatestFrame` method on the acquired `ColorFrameReader` to obtain a `ColorFrame`
2. Call the `AcquireLatestFrame` method on the acquired `DepthFrameReader` to obtain a `DepthFrame`

Once the previous steps have been performed the data can be read from the two acquired frames. Once the processing is complete be sure to call the `Close()` member method on the two acquired frames to release the system resources. Repeat the previous step as many times as desired. If no more data needs to be collected, then call the `Close()` member method on both the acquired `ColorFrameReader` and the acquired `DepthFrameReader` as well as the acquired `KinectSensor` instance.

4.1.5 Final Decision

In addition to all of the advantages and disadvantages of each camera device described above, it is also important to compare the system requirements. Our project team has the computing power to use each of these devices and we feel it is also reasonable to assume that game developers would also already have devices of this caliber in order to run high performance games. Even so all the devices compared have comparable hardware requirements to one another and are noted below [2, 3, 4].

Sensor	OS	CPU	Memory	I/O	Misc
HTC Vive	Win 7 SP1; Win 8.1; Win 10	Intel® Core™ i5-4590 <	4GB <	USB 2.0	Unspecified
Microsoft Hololens	N/A (Untethered)	N/A (Untethered)	N/A (Untethered)	N/A (Untethered)	N/A (Untethered)
Intel® RealSense™ F200	Win 8.1(x86/x64); Win 10 (x64)	4th or 5th Generation Intel® Core™	Unspecified	USB	Unspecified
Microsoft Kinect	Win 8 (x64) <	i7 3.1 GHz (or higher)	4 GB (or higher)	USB 3.0	DirectX 11

We took the HTC Vive and the Microsoft Hololens out of consideration because we did not feel that a head-mounted device fit with the way users would interact with our application. Our main decision was choosing between the Intel® RealSense™ F200 camera and the Microsoft Kinect. Both sensors had many of the same advantages and disadvantages. The differentiating factors between the two was the size of the sensor, cost of the sensor, and the usability of the APIs. It was in these areas that the aspects of the devices differed enough for us to make our decision.

The Intel® RealSense™ F200 Camera was marginally cheaper, costing approximately \$100. This reduced price helps to achieve a greater level of accessibility for our tool which is an overall goal of our project. By reducing the costs allows for smaller development

teams to expedite their design workflow. The Intel® RealSense™ F200 also did not require the additional purchase of an adapter for the sensor which simplifies the integration for the end user of our tool.

The handheld usability means that camera can be aimed easily and moved around the workspace as needed. Although the USB tethering of the device could make certain angles difficult, the use of a rotating platform or a primary computing device which can be easily moved, could be used to minimize this difficulty. The use of such solutions would allow images to be captured from every angle which is necessary for the computer vision algorithms that we will implement to process the data.

Finally, although the APIs were similar we felt that the documentation and overall pattern of use found in the Intel® RealSense™ SDK were much more straightforward and easier to understand. There were also several simple code examples to help get programmers who were unfamiliar with the API.

Both the Microsoft Kinect and the Intel® RealSense™ F200 are comparable devices and in the unlikely event that the Intel® RealSense™ F200 will not satisfy our requirements, the Microsoft Kinect is a sound alternative.

4.2 Computer Vision Research

4.2.1 Inputs

There are two basic input formats for the incoming camera data: Point Cloud Data (PCD) or RGB-D image pairs. Point Cloud Data provides millions of data points which provides an implicit high accuracy level. The difficulty with Point Cloud Data is that minimization or simplification would be required before processing if we wish to achieve fast runtimes.

RGB-D image pairs would contain an RGB image alongside a depth image per frame. This provides a faster runtime more similar to image processing tasks, but it still provides depth information to make sufficiently accurate processing results for our purposes. For these reasons we have chosen to utilize the ability of the Intel® RealSense™ F200 camera to capture RGB-D image pairs for our application.

The amount of images passed to the computer vision interface is a crucial detail and will take testing to determine the optimal amount of images, angles of view, and capture rate.

4.2.2 Outputs

Output from the computer vision interface will mimic the researched methods in the following section. These algorithms output pose information usually in the form of metadata. The metadata for our project will include an estimated object center point in 3D coordinates based on the camera's viewpoint, which is used to estimate a translation matrix. That translation matrix, an object rotation matrix, the object's scale, and an enumerated object type that corresponds with an object model will be outputted to provide sufficient information to add

an object to a Unity scene. We plan on importing this data directly into the Unity Game Engine through our plugin interface.

4.2.3 Training Hardware

Due to the demand required in the training process, our team will be using the strongest computer we have available to us. To train our detection algorithm, we will use Mark's personal laptop, which has the specifications listed below.

Component	Specification
CPU	Intel® 6th Generation Core i7
OS	Windows 10 Pro
Display	15.6" FHD (1920x1080), IPS-Level
Chipset	Intel® HM170
Graphics	GeForce® GTX 1060 with 6GB GDDR5
Memory	DDR4 16GB
Storage	M.2 SSD 128GB and 1TB 5800rpm HDD

4.2.4 Computer Vision Terminology Overview

We will present brief definitions for most of the terms related to computer vision the average reader may not be familiar with. Please refer back to this section if you encounter unfamiliar terms in the following section.

- 6D or 6DOF - The six degrees of freedom typically used for pose estimation algorithms. These include the x translation, y translation, z translation, x rotation, y rotation, and z rotation.
- Convolutional Neural Network (CNN) - A CNN is a data structure composed of layers. Each of these layers is composed of individual processing units called neurons which have weights associated with them. The advantage of CNNs over normal neural networks is that they are explicitly designed for image processing. They can handle large images due to their three dimensional structure, the third dimension of which is the depth of the neuron structure not the network itself. The network's layers can be categorized into three basic types: Convolutional layers, Pooling layers, and Fully-Connected Layers.
- Convolution - A convolution in a CNN context is a matrix operation resulting in one scalar value as a result. The dot product of two matrices are computed, one of which is a small matrix called a filter. The result is a single scalar value.

-
- Convolutional layers - Convolution layers in a CNN are what make this structure special. Each of these layers contains filters that are usually small but deep, extending the full depth of the input data. These filters are convolved with sections of the input data to create a two dimensional list of values called an activation map. This map represents the filter reactions at every point in the input data. Each layer can have many different filters and each filter has its own activation map. These maps are what make up the depth of each layer. These layers do most of the processing work in the network.
 - Pooling layer - The job of a pooling layer is to reduce the spatial complexity of the data being passed through the network. The operation these layers perform downsamples the images in the network to reduce the amount of parameters and therefore reduce the processing load on the network.
 - Normalization layer - A normalization layer in a CNN is a method of regularization that provides the activations with more of a significant value peak leading to more recognizable local maxima when compared with neighboring values.
 - Fully connected layer - A fully connected layer in a CNN is a layer whose neurons are attached to all of the activations of the previous layer rather than a small amount. This makes their activations able to be computed by a matrix multiplication with a bias offset.
 - Dropout layer - Dropout layers in a CNN are helpful in training because they reduce the size of the network by having a probability of forcing nodes to drop out of the network. The nodes are reinserted after the network is trained with their original weights. This process cuts down on training time and prevents the model becoming too complex.
 - Energy Function - This is the function that is minimized when computing values in machine learning tasks. You can view this function as a method of inferring whether a value is correct or not. Lower energies are associated with correct values and higher energies are associated with incorrect values.
 - Classification problem - Image classification problems are determining if an object in a scene belongs to a set, or one of many sets, of other objects or not.
 - Softmax regression - A method of supervised learning extending logistic regression to multi-class classification problems rather than just binary classification problems.
 - Iterative closest point (ICP) - This method of point cloud consolidation keeps one point cloud fixed and matches another source cloud to best match these reference points. Using a cost function, the rotation and translation are estimated and applied to the source points.
 - Outlier - An outlier is a value point in a statistical distribution located in the tail.

-
- Inlier - An inlier is a value point in a mathematical model whose distribution can be explained by the model parameters.
 - Random sampling consensus (RANSAC) - RANSAC is a algorithm for estimating parameters of a mathematical model. This will fit the data to a certain model (e.g. line fitting). We will provide an in-depth look at our chosen implementation of RANSAC in the Detailed Design section.
 - Kabsch Algorithm - This algorithm calculates the rotation matrix of two sets containing pairs of points such that the root mean squared deviation between the sets is minimized.
 - Decision tree - A decision tree is a tree structure where each node acts as a test of an attribute and every branch is a representation of the outcome of that test. The leaf nodes are labels that indicate which outcome is chosen as the final decision for the tree. These trees can be used as predictive models for machine learning tasks.
 - Random forest - A random forest is an ensemble method of machine learning using multiple decision trees usually for classification purposes.
 - Gaussian Mixture Model (GMM) - A GMM is a weighted sum of Gaussian statistical distributions. This creates a parameterized probability model of more continuous raw values.
 - Perspective-n-Point - This is a camera localization and camera-pose estimation problem. There are many popular methods for solving this problem using points in a 3D space with their corresponding projections, usually with extended refinement using RANSAC.

4.2.5 Previous Methods

We have studied many state-of-the-art computer vision methods for 3D scene processing, object detection, object recognition, and model alignment. Our goal with this research is to find a method or methods to adapt for our application that will provide a fast, accurate, and robust method of processing a 3D scene from our camera and exporting usable information to the Unity Game Engine to create a template level layout for the user.

We ensured our search was broad and included as many different methods as possible to allow for the mitigation of any single method failing or not satisfying the needs of the user. All of the following methods will require significant refinement and alteration to meet our needs but will save us time overall because we will not have to develop a 3D computer vision algorithm from scratch.

The heart of the problem that this project faces is pose estimation of a rigid object in a 3D scene with six degrees of freedom. This problem can be described as converting the position of a physical object from its own coordinate system to the camera's coordinate system. The

important aspects of an object's rotation are defined as its rotation and translation relative to the total coordinate system.

Most of these methods provide bounding-box information as output after processing. If rotational information is not provided this bounding box gives us the ability to infer where objects are in the scene and allows us to convert this information into a 3D box primitive as our input into the Unity Game Engine. This would work for a physical level built with only rectangular blocks, but we would like to find a method robust enough to include other types of blocks such as cylinders, cones, and pyramids. If a 3D model of the object and sufficient rotational information is provided we can fit other block types within the bounding-box. With the appropriate rotations applied, this provides a successfully and robustly matched object in the 3D scene space. Other methods match pre-existing 3D models to specific data points, typically pixels with object labels associated with them, in the scene provided.

The limitation set by these model-matching methods would be that users must use these specific types of blocks to get accurate results from our software. This will satisfy our project requirements, but will not make a robust system for broader use. A stretch goal would be to implement more robust methods for alignment that do not rely on pre-existing models. For now, we will adapt one of the model-alignment methods for our software and write an implementation in C# for use in a Unity Engine plugin. Any of the methods that require 3D models are appropriate for our purposes because we have been provided 3D models for each of the block types present in our target block set.

Aligning 3D Models to RGB-D Images of Cluttered Scenes

This is a convolutional neural network (CNN) approach to 3D pose recognition with objects from a furniture dataset. The network architecture has 3 convolution layers, 4 normalization layers, 3 rectified linear units, and a dropout layer with a ratio of 0.5. The network is trained for classification with softmax regression loss with the assumption that all objects will be resting on a surface. When testing, the image is propagated forward through the network and the network outputs a pose estimate of an object's orientation [5].

Then this method performs a search on a list of computer-aided design (CAD) models at different scales. Then the model search compares bounding box data given by the CNN output with dimension data from the models. When the correct model and scale is found for an object the rotation and translation are computed by using the iterative closest point (ICP) algorithm. Gravity is computed to restrain ICP to only rotate the furniture models in an upright position [5]. The objects' vertical translation is also assumed to be at floor level which helps with occlusion issues.

This method provides useful ideas about a potential convolutional neural network approach to our project's computer vision problem. The dataset and model-fitting methods are not applicable to our specific needs, but I believe the neural network approach could be a potentially useful architecture that we may consider for risk mitigation if another structure fails to meet our needs.

Learning 6D Object Pose Estimation using 3D Object Coordinates

This method begins by predicting probabilities and coordinates of object instances using a decision forest. An energy function is applied to the output of the forest next. Then, optimization is performed using an algorithm based on Random Sample Consensus (RANSAC) [6].

First, the decision forest is used to classify each pixel of an RGB-D input image. Each pixel becomes a leaf node of one of the decision trees in the forest. Then a prediction can be made about which object a pixel may belong and where on the object it is located. The forests were trained on RGB-D background images with random pixels from object images that were already segmented [6].

Then, to give each pixel a probability distribution and a coordinate prediction for each tree and object, each pixel of an input image is run through every tree in the trained decision forest. The result of this is the vectorized results from all leaf nodes in the forest containing probabilities and predictions for each pixel [6]. This allows for the prediction of a single pixel belonging to the desired object. If the object was predicted in all of the leaf nodes then its object probability will be calculated.

Pose estimation is calculated by optimizing the energy function in this method. Depth energy, coordinate energy, and object energy are calculated and summed to form the total energy for an estimated pose. The depth component is an indicator of how much an observed depth differs from that of an expected depth of a predefined object at the estimated pose. The other components are measures of how much the observed coordinates and object predictions differ from the predicted tree values [6].

Pose sampling is done by choosing three pixels from an integral of the image to increase efficiency. The Kabsch algorithm is used for obtaining object pose hypotheses. A transformation error is calculated for each pose hypothesis using 3D coordinate correspondences. The error for these distances must be under five percent of the target object's diameter. After 210 hypotheses are accepted the best 25 are refined by calculating error for all the trees. If the error distances are within 20 millimeters the pixel is accepted as an inlier [6].

The inliers' correspondences are saved and used for repeated runs of the Kabsch algorithm until one of three conditions occur. The conditions are as follows: the number of inliers becomes less than three, the error stops decreasing, or the number of iterations exceeds the limit of 100 [6].

Learning Analysis-by-Synthesis for 6D Pose Estimation in RGB-D Images

This is another convolutional neural network implementation of 6D pose estimation. The network takes 6 modes of input: observed depth, rendered depth, rendered mask, depth mask, object probability, and object coordinates. For image preparation to use the network this method runs the RGB input image through a random forest and produces the observed probabilities and coordinates based on the forest's modes of output. The probabilities are denoted by grayscale pixel intensity in the outputted image. The images created for object

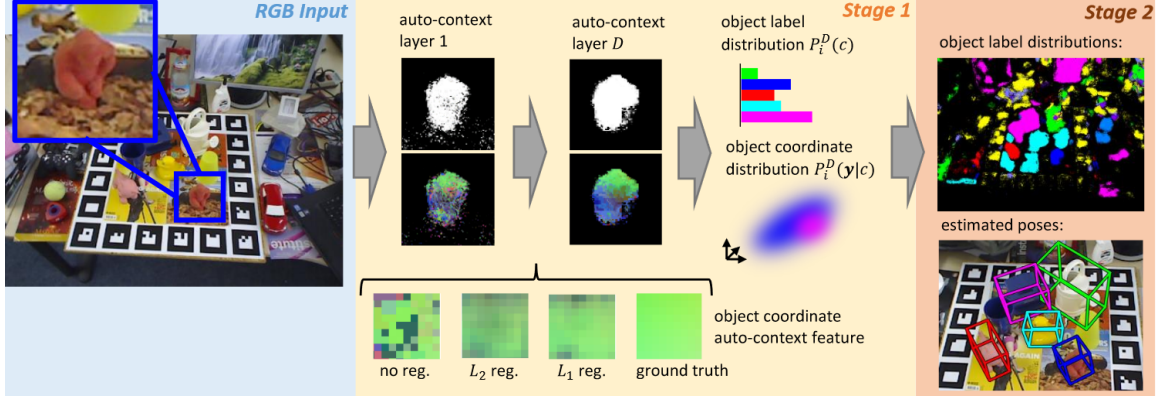


Figure 1:

coordinate measures are visualized in RGB and there is one image for every tree in the random forest [7].

After the random forest process is completed once, the image renders are then passed into the input channels of the convolutional network with the input image’s observed depth image. The data is fed through the network and an energy function is calculated. The energy function is then used to calculate the object pose hypothesis. The pose hypothesis transformations are then applied to a 3d model to produce a pair of rendered object coordinate and depth images. These are passed into the CNN and the process repeats until the energy function is at its apparent minimum [7].

Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image

This paper, which debuted at the 2016 Computer Vision and Pattern Recognition (CVPR) Conference, by Brachmann *et al.* is currently our most useful resource for the computer vision interface of our software. The paper is packaged with source code and extensive documentation which allows us to study in-depth what their method is accomplishing and how it functions. This allows us to accurately weigh the benefits and restrictions of this method in contrast to the other methods reviewed. An overview of the method is shown in figure 2, shown below with permission from the author [8].

This algorithm predicts object coordinates and labels with a modified random forest called a joint classification regression forest. This forest is trained by mapping object coordinates to a smaller set of discrete values using nearest neighbor assignment to the training data’s object coordinates randomly. Then those with the most information gain when compared with the object distribution are chosen and these are stored as a Gaussian Mixture Model. When testing an image, a pixel is fed through a tree in the forest and when it gets to a leaf it will store the distribution of object coordinates and predictions for that pixel. Then all of that tree’s object predictions are merged to form an overall prediction for that pixel. The coordinate distribution for the tree is then averaged [8].

$$H_{c'}^* = \operatorname{argmax}_{H_{c'}} \sum_{i \in \mathcal{W}(H_{c'})} \sum_{T \in \mathcal{T}^D} \mathbb{1}[\|\mathbf{p}_i - CH_{c'}\boldsymbol{\mu}_{i,T}\|_2 < \tau_{in}], \quad (5)$$

Figure 2:

Then Brachmann *et al.* use a stack of these forests to generate context information for each pixel in the input image. The first level of this stack of forests is trained normally, but all the following trees have access to the outputted information of the previous tree. To smooth the object probability distribution they use a median filter on the pixels surrounding each pixel. This median filter optimizes loss, specifically the least absolute deviations that minimize the difference between hypothesized values and target values, which allows it to be effective when dealing with outlier pixels that would otherwise negatively impact the result. The object coordinates are also regularized using a similar method which optimizes loss[8].

The object poses are then estimated using RANSAC. When RANSAC is mentioned in this paper it is actually a specific paradigm of RANSAC called preemptive RANSAC which estimates a certain number of hypotheses at once. This paradigm speeds up the normal RANSAC calculation when there are less inliers and many more outliers. Preemptive RANSAC is better for this case since there are always a large amount of outliers, but not too many to find a valid hypothesis. To perform this operation for a single object the forest values of object predictions, pixel positions, and object coordinates are used to estimate the 2D-3D correspondences. Then the reprojection error is calculated and subsequently minimized with the help of a camera matrix. This error is acceptable if it is under a pre-defined threshold, meaning that this data point is an inlier. The best pose hypothesis is the one in which the largest amount of inliers are found [8]. The equation from the paper that accomplishes this task is reprinted below with the permission of the author.

Hypotheses are drawn by solving the perspective-n-point problem for four correspondences. The first of four pixels is drawn according to a random tree’s mean probability distribution then the other three are drawn within a certain distance of the first pixel depending on the size of the object in question, but if the reprojection error calculated for the pixels is found to be above the threshold then this hypothesis is discarded and a new one is drawn. These hypotheses are sorted by their number of included inliers and the lower half is discarded. The hypotheses left after this process are then further refined by repeating the process of solving the perspective-n-point problem on the new set of inlier value points until only one hypothesis is left. This remaining hypothesis is the estimated pose for the object in question [8].

When this algorithm is detecting multiple objects at once the above method of detection does not maintain efficiency when a large number of objects are to be detected. Multi-object detections are performed by drawing a shared set of hypotheses instead of individual sets for each object. These hypotheses are chosen by analyzing the object probability dis-

$$P_{\mathcal{R}_i}^D \approx \sum_{(m, \boldsymbol{\mu}, \Sigma) \in \mathcal{M}_i^D} m \int_{-\infty}^{\infty} z^2 \mathcal{N}([0, 0, z]^T; \boldsymbol{\mu}_e, \Sigma_e) dz \quad (8)$$

Figure 3:



Figure 4:

tributions at the first pixel of the current hypothesis when performing the same actions as a single-object RANSAC pose estimation. These chosen hypotheses still have to pass the same validity check as in single-object detections. Using this method allows the algorithm to decide if a hypothesis belongs to multiple objects during the hypothesis sampling process instead of having a separate process for each object. This allows their RANSAC pose estimation to scale more easily with a large number of object detections in the same image [8].

During the pose refinement stage of this implementation they replace the standard error calculation that uses depth information with an error based on the projection volume of a pixel. This is one of the tweaks that allows this method to be extended to RGB images without depth information available. Instead of calculating the log-likelihood of the correspondences observed in a hypothesis using the depth-based error they find the approximate likelihood of the projection volume, as seen in the equation seen below which was reprinted with the author’s permission, and take the log-likelihood of that [8]. Results of some final poses from the Hinterstoisser *et al.* dataset are shown in the paper’s figure 4 pictured below, with permission from both Hinterstoisser and Brachmann [8, 9].

Since source code and documentation were included with this paper we have decided to use it to test the speed and accuracy of this type of pose estimation algorithm. We will test on the smaller dataset included with the source code (dubbed the ‘Dummy Data’) to ensure that the implementation is functioning correctly. Then it will be trained on the full Asian

Conference for Computer Vision (ACCV) object dataset provided by Hinterstoisser *et al.* [9]. Finally, we will test this algorithm on data we collect with the Intel® RealSense™ F200 camera. We will try to match the performance metrics gathered in this step as closely as possible when we implement a similar algorithm in C#.

4.2.6 Datasets

The RGB-D Object Dataset

This dataset contains 300 objects placed into 51 different categories. It was created with a Microsoft Kinect camera which is very similar to the Intel® RealSense™ F200 camera we plan to use for our application. The RGB frames are captured with width of 640 pixels and height of 480 pixels. The corresponding depth frames are captured at a rate of 30 Hz. The data was captured by recording objects rotating 360 degrees on a spinning table. There is pose-based ground truth data for every object in this dataset.

This dataset also includes 22 videos of indoor scenes including the objects in the dataset with sufficient cluttering and occlusion for our training purposes. The varying distances in the scenes can help with robust training for different camera setups as well [10].

4.2.7 The Object Segmentation Database (OSD)

The Object Segmentation Database includes data on 111 objects with corresponding RGB-D data divided into appropriate categories based on their basic shapes. There are categories for boxes, stacked boxes, occlusion, cylindrical objects, mixed objects, and complex scenes. The basic shapes provided could be an excellent resource for testing our algorithm since the blocks provided by our sponsors are the same basic shapes as those included in this database [11].

4.2.8 Willow and Challenge Dataset

The Willow dataset contains 24 series of 353 total RGB-D images with available ground-truth information and separate sets for training and testing. These include 110 objects and 1168 appearances of those objects.

The Challenge dataset is available alongside the Willow dataset. It includes 39 frame sequences, with 176 RGB-D images total. These include 97 objects with 434 appearances [12].

Big Berkeley Instance Recognition Dataset (Big BIRD)

This dataset includes 600 images, 600 RGB-D-based point clouds, pose information for every image and point cloud, segmentation masks for all images, and meshes created from merged point clouds. This dataset is extensive but utilizes point clouds which would not be

applicable for our purposes. Although, if extra data is needed, this could be a potentially useful resource [13].

Hinterstoisser *et al.* ACCV Dataset

This dataset was created for a paper presented at the Asian Conference for Computer Vision (ACCV) by Hinterstoisser *et al.*. This dataset contains 15 videos of 15 different objects with texture-less models for matching. There are corresponding ground truth poses for all scenes and objects. There is sufficient variation in clutter, camera angle, camera tilt, scene scale, and object rotation in the scenes for robust pose estimation testing. Every video is comprised of over 1100 images from varying angles [9]. This dataset is used to test the method presented in “Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image” and we would like to test our implementation on this dataset to benchmark test our implementation against the one presented by Brachmann *et al* [8].

4.3 Unity Game Engine Research

4.3.1 Basic Unity

Overview

Unity is a game development engine that permits users to create a variety of games for different platforms, some of the biggest being PC, Xbox, Playstation, and Android/IOS.

The base requirements for Unity version 5.5.0 are:

OS: Windows 7 SP1+, 8, 10; Mac OSX 10.8+ GPU: Graphics card with DX9 (shader model 3.0) or DX11 with feature level 9.3 capabilities

Scripting

Unity uses an implementation of the Mono runtime for scripting. Mono is an implementation of the .NET framework. Mono is sponsored by Microsoft and it follows the ECMA standards for C#.

Unity mainly supports two scripting languages, C# (which is what this project is using) and UnityScript, which is a language that is modelled after Javascript to use specifically for Unity. Unity can compile the source code that is in the “Assets” folder of the project. For other languages, they can be used in Unity scripts in the form of DLLs, so as long as a language can be compiled into a Dynamically Linked Library(DLL) file it can be tied into Unity scripts.

Unity’s GameObjects are controlled by Components that are attached to them, and scripts allow the user to create these Components and manipulate them dynamically. Unity’s GUI allows for a simple script creation by going to Assets -> Create -> C# Script or Assets -> Create -> Javascript. This will create a class following your naming convention that

extends `MonoBehaviour` and has two methods already created, `void Start()` and `void Update()`.

The extension of `MonoBehavior` is necessary to allow the script to interface with Unity. It contains the necessary classes to allow for the created script to affect the `GameObjects` in Unity. It also gives the class access to the functions that determine when the script is called (like start and update). The `Start()` method is called by Unity when the script is initialized, whereas the `Update()` method is called by Unity on every frame of the game.

3D Models

Unity has two kinds of file that it can use to import 3D models. The first is exported 3D file formats and the second is application files from 3D Editors.

The exported 3D file formats that Unity uses are: `.FBX`, `.dxf`, `.obj`, `.3DS`, and `.dae`. The benefit to these kinds of files are that they tend to be smaller than the application files and export only the data you will be using. These types of files are more generalized and are more easily generated programatically due to them not being proprietary to a certain piece of premium software.

The applications that unity accepts files from are: Blender, Cinema4D, Cheetah3D, Lightwave, Maya, Max, and Modo. These kinda of files tend to be simpler in terms of usability, especially since Unity will re-import the model every time the user saves the file. But they also tend to be larger when compared with exported files due to data bloating which is commonly found within 3D modeling software, which can cause a slowdown of Unity. The proprietary software used to create the file must also be owned and licensed on the computer in which it's being used.

Unity itself has support for simple models to be created through the editor. In the main editor screen, the user can go to Create -> 3D Objects and choose from a list of different simple 3D objects such as cubes or cylinders. Unity will then spawn the object, typically at world coordinates (0, 0, 0), and the user can edit them.

Unity also also has support for dynamic Mesh creation.

The file format for 3D models we have chosen to use for our project in the Unity Engine is the `.obj` format mentioned previously. This format was chosen due to some key advantages such as the ability to generate the file programatically if it is found to be necessary. The `.obj` file specification is also publicly available and allows us to construct `.obj` files from scratch. The four types of vertex types are geometric vertices (`v`), texture vertices (`vt`), vertex normals (`vn`), and parameter space vertices (`vp`) [14].

The following are proper syntax examples in the `.obj` file format:

`v x y z w` for a geometric vertex, where `x`, `y`, and `z` are coordinates of a vertex and `w` is a weight for curves defaulted to one.

`vp u v w` for a freeform geometry, where `u` is either a coordinate of a curve or the first coordinate of a surface. `v` is the second coordinate of a surface. `w` is a curve trimming weight defaulted to one.

`vn i j k` for a normal vertex, where *i*, *j*, and *k* are the normal vector components.

`vt u v w` for a texture vertex, where *u* is the horizontal direction, *v* is the vertical direction, and *w* is the depth. Depending on the dimensionality of the texture, *u* and *v* may be 0.

Syntax for different geometric elements are as follows:

`p v1 v2 ... vn` for a point, where *vn* represents the *n*th vertex which will create the *n*th point.

`l v1/vt1 v2/vt2 ... vn/vtn` for a line, where *vn/vtn* represents the *n*th vertex on the line separated from the texture vertex with a `/`.

`f v1/vt1/vn1 v2/vt2/vn2 ... vn/vtn/vnn` for a face, where *vn/vtn/vnn* represents the *n*th vertex, texture vertex, and normal vertex respectively.

`curv u0 u1 v1 v2 ... vn` for a curve, where *u0* is a float representing the starting parameter value for the curve, *u1* is a float representing the ending parameter value for the curve, and *vn* represents the *n*th control point parameter vertex for the curve (there must be at least two).

`curv2 vp1 ... vpn` for a 2D curve, where *vpn* is the *n*th control point parameter vertices.

`surf s0 s1 t0 t1 v1/vt1/vn1 ... vn/vtn/vnn` for a surface, where *s0* is the start parameter value for the *u* direction, *s1* is the end parameter value for the *u* direction, *t0* is the start parameter value for the *v* direction, *t1* is the end parameter value for the *v* direction and *vn/vtn/vnn* is the *n*th control vertex with the *n*th texture vertex and normal vertex separated by a `/` [14].

Asset Store

Unity has an Asset Store where users can put any plugins that they create to be sold to other Unity users. It contains thousands of plugins and other assets created by thousands of users for use in a large amount of game types. From 3D to 2D, controls, sprites, models, and more it can all be found on the Unity asset store. Some of these assets are free for anyone's use and others have to be paid for. Any Unity user with an account can have their assets looked at by a Unity Assets Store team and then placed on the asset store for purchase.

4.3.2 Plugin types

Managed Plugins

Managed plugins are a type of plugin that Unity supports which allows Unity to use C# code that has been created by a third party to supplement created code. It allows for a community to form around Unity that continuously builds additional functionality allowing users to create better products. Many Unity users eventually will place their managed plugins on the Unity Asset store for others to buy and then use/improve on for their needs.

Unity allows for any C# files in a folder labeled “plugins” under the Assets folder to be considered a plugin, the files in that folder will be included with every C# script that the user creates, allowing access to the methods.

Managed plugins can also be implemented through the usage of Dynamically Linked Libraries (DLLs). This allows a user to take C# code and compile it through a different compiler into a DLL, then the user can place the DLL into a unity plugin folder to be used in their scripts. From there the DLLs can be used in the same way that normal C# scripts are used in Unity.

Native Plugins

Native plugins are libraries of native code that is written in any language that is not directly compiled by Unity, that can also be compiled into a DLL (Windows). The process of placing the Native Plugin into the project is the same as Managed Plugins, you create a folder titled “plugins” located under the Assets folder and drop the DLLs in there.

To access the methods or functions from the DLL files the user must add tags on the C# method used to call the DLL method. First you import the plugin, then you can declare the external method using the extern modifier to mark it as an external function:

```
[DllImport ("PluginName")]  
private static extern pFunction();
```

The user can then use the declared method to make a call to the native method/function from the DLL. It should be noted that when creating Native Plugins using C++ or Objective-C, there must be steps taken to avoid name mangling issues, because plugin functions use a C-based call interface.

Any version of Unity that is below 5 requires either a Unity Pro License or a Unity Enterprise License to be able to use Native Plugins. Unity 5, however, allows all versions to use Native Plugins, from the Personal version to the Enterprise Version.

Extending the Editor (Maybe change this part’s location)

Similarly to how plugins can be made for game logic in Unity, one could also create plugins to extend the Unity editor itself to make game functionality easier. In fact, one might say that is the entire purpose of this project. To extend the editor, a script needs to be created where the class extends EditorWindow. This script will create a new editor window

4.3.3 Version Differences and Pricing

Features	Personal	Plus	Pro	Enterprise
All Engine Features	Y	Y	Y	Y

Features	Personal	Plus	Pro	Enterprise
All Platforms	Y	Y	Y	Y
Continuous Updates	Y	Y	Y	Y
Royalty Free	Y	Y	Y	Y
Splash Screen	Y	Custom	Custom	Custom
Revenue Capacity	\$100k	\$200k	Unlimited	Unlimited
Unity Cloud Build	Standard Queue	Priority Queue	Concurrent Builds	Dedicated Build Agents
Unity Analytics	Personal Analytics	Plus Analytics	Pro Analytics	Custom Analytics
Unity Multiplayer	20 Concurrent Users	50 Concurrent Users	200 Concurrent Users	Custom Multiplayer
Unity Ads	Y	Y	Y	Y
Beta Access	Y	Y	Y	Y
Pro Editor UI	N	Y	Y	Y
Skin				
Performance Reporting	N	Y	Y	Y
Flexible Seat Management	N	Y	Y	Y
Asset Kits	N	20% Off	40% off	40% off
Unity Certification	N	1 Month Access	3 Month Access	3 Month Access
Courseware				
Source Code Access	N	N	\$	\$
Premium Support	N	N	\$	\$

Unity free

Unity Free is the base version of Unity that anyone can download from their website at www.unity3d.com. The base requirements for Unity version 5.5.0 are:

OS: Windows 7 SP1+, 8, 10; Mac OSX 10.8+ GPU: Graphics card with DX9 (shader model 3.0) or DX11 with feature level 9.3 capabilities

Unity's base edition is different from the other editions in a variety of ways. Any game created in it automatically has a short splash screen video play at the beginning of any game when it is launched depicting the Unity logo with the words "Personal Edition" under the logo.

Unity personal comes with a \$100k revenue capacity. What that means is that if an entity

uses Unity personal to create their game and then sells it, if the game makes more than \$100,000 dollars in annual gross revenue, that entity must sign up for either the Plus, Pro, or Enterprise edition of Unity. If they do not, then they are not allowed to use Unity anymore. They may still sell the game which made them that money, but they are no longer allowed to update or expand that game at all, or make any new games using Unity.

The personal edition also comes with the Unity Cloud Build feature, it allows developers to instantly compile, test, and deploy the game builds to everyone that needs it. The standard queue processes the builds in FIFO form across all Unity customers.

Unity Analytics is a feature that allows game developers seamlessly view information about their game like how it's being used, general gameplay behaviors, and it comes with a money optimization feature. It comes with Unity IAP, which allows users to set up In-App Purchases within their game and keep track of it across all platforms.

Unity Plus

Unity Plus is the version of Unity that is one level above the personal edition. It costs \$35 per person per month and comes with upgraded features.

The first upgraded feature is the splash screen. The Plus edition allows users to either use the normal Unity splash screen, create their own splash screen and insert it into where the Unity splash screen would be, or elect to not use a splash screen at all.

The Plus edition also upgrades the revenue capacity by \$100k extra, allowing users to make an annual gross revenue of \$200k before they are required to either subscribe for Unity Pro Edition or Unity Enterprise Edition.

The Unity Cloud Build feature is also improved in the plus version, it gives the user a Priority Queue allowing their builds to be compiled, tested, and deployed faster than the personal version queue.

Unity Plus gives users access to all the features in Unity Analytics that the personal version users have, but also gives Priority Analytics, livestream support, and more specific analysis of the game data.

Unity Plus also comes with a dark theme called the Pro Editor UI theme which is not available for the personal version.

Performance reporting is a feature that is only available in Unity Plus and above. It allows users to view bugs and errors in all of their Unity builds across all platforms, it prioritizes issues as they are reported in realtime.

Another feature that Unity Plus has is Flexible Seat Management, this allows a moderator/manager of the entity or team that uses Unity to control what person on the team uses Unity and how they use it.

Another thing that having a Plus subscription gives users is a 20% discount in the Unity Assets Store, plus one months access to Unity's Certification Program.

Unity Pro

Unity Pro edition is the next tier of Unity above the Unity Plus Edition. It costs \$125 per person per month and upgrades the features even more than Unity Plus does. Unity pro contains all of the features that the previous two have, with some upgrades.

Unity Pro edition has no limit on revenue like the previous versions. Anyone who is subscribed to the pro version can make any Unity game and does not have to change their subscription based on how much they make. This is most likely because Unity Pro is the highest tier of Unity that a single person can buy.

The Unity Cloud feature is upgraded further from the Plus Unity Cloud feature. It still contains the Priority Queue allowing the user to have a faster build time than the Personal users, but it also allows for creating multiple parallel builds for any project.

Unity Analytics comes with the Unity Pro Analytics feature. It has all that plus has with 50 gigabytes of raw data export. It also has even more game data analysis than the plus version.

The Assets Store discount is upped in Pro to 40% from the 20% that is discounted in Plus. The Unity Certification Course access is extended to 3 months.

Unity Enterprise

Unity's Enterprise edition is somewhat of a mix of the previous versions. It allows businesses to make a customized plan for all of their workers that need Unity to give those who need specific versions exactly what they need. This also gives the business access to special Enterprise features.

In the Enterprise tier, Unity will build a custom Unity Cloud infrastructure to give the business a queue time that only includes the users in that business.

The Unity Analytics feature is also upgraded in the Enterprise tier to a level that is configurable by the business. It has all the features of Pro with a custom raw data export size and a custom analysis.

4.4 Unreal Engine 4 Research

Unity is the primary target of our project, but the Unreal Engine is similar target that may serve as an additional implementation path. The Unreal Engine has recently changed into a free-to-use model, with a royalty needed if the profits exceed three thousand dollars per quarter. This is important to note for our project because of the implications for educational use. With that in mind, we will describe the process of creating a similar implementation of our project in the Unreal Engine.

Field name	Info	Description
FileVersion	<i>Required</i>	Version of this plugin descriptor file itself. It is used for backwards compatibility as new features are added to the plugin system. You should usually set this to the latest version that is allowed by the version of the engine you are using. The latest version is currently 3 , and is the version of format that is documented here. We do not expect this version to change very frequently. In source code, you can look at EProjectDescriptorVersion to see the actual value. If you require maximum compatibility with older versions of the engine, then you can use an older version of the format, but it is not recommended.
Version	<i>Optional</i>	Current version number of this build of your plugin. This value should always increase with future versions. This version number is not usually displayed to end-users.
VersionName	<i>Optional</i>	Version of the plugin displayed in the editor UI. This is never used for any versioning checks and can be in whatever format you would like, however we suggest a simple Major.Minor format. You should always update the VersionName whenever the Version number has increased.
FriendlyName	<i>Optional</i>	Name of the plugin displayed in the editor UI. If not specified, the name will default to the .uplugin file name.
Description	<i>Optional</i>	A paragraph of text that describes what this plugin is used for. This will be displayed in the editor's plugin window.
Category	<i>Optional</i>	This is a special dot-separated path string that allows you to assign your plugin to a category in the editor UI. It is purely for organizational purposes. An example of a category path is " Editor Features.Level Editing.Mesh Painting ". Each category is separated by a period character and represents a deeper level in the tree.
CreatedBy	<i>Optional</i>	The individual or company name that created this plugin. This may be displayed in the plugin UI or in other locations.
CreatedByURL	<i>Optional</i>	A web link to the individual or company that created this plugin. If specified, the editor UI may display a hyperlink that allows the user to browse to this web page.
DocsURL	<i>Optional</i>	A web link to the plugin's documentation. If specified, the editor's plugin browser will display a hyperlink that allows the user to browse to this web page.
SupportURL	<i>Optional</i>	Link to the support page for the plugin. Will be shown on the editor's plugin browser if specified.
CanContainContent	<i>Optional</i>	When specified and set to true , enables Content support for this plugin. The default setting is false . See the section on Content in Plugins for more info.
Modules	<i>Optional</i>	For plugins that contain source code (and binaries), this is the list of modules that should be loaded at startup. See below for more info.

Figure 5:

4.4.1 Plugin System

Unlike Unity, Unreal plugins operate on a relatively separate layer of engine itself. The support documentation for the system is also sparse, due to the relatively new implementation of the system (2015).

Unreal uses C++ within its environment to do programming, and the same goes for the plugin system. For the most part, plugin source file layout is the same as any other C++ module in Unreal Engine. The Primary addition is a *.uplugin file that acts as a descriptor for the plugin.

Descriptors

Plugin descriptors are files that end in a *.uplugin extension that are formatted like JSON. one should refer to the following two tables to create a proper plugin description couple with a proper proper module description.

Descriptor File Format [15]

Module Descriptors [15]

Plugin Code

The process for developing our plugin in Unreal will be very similar to the process in Unity, because we will be linking a DLL from within the plugin to provide the necessary functions

Field name	Info	Description
Name	<i>Required</i>	Unique name of this plugin module that will be loaded with the plugin. At runtime, the engine will expect appropriate plugin binaries to exist in the plugin's Binaries folder with the module name as specified here. For modules that have a Source directory, a matching *.Build.cs file is expected to exist within the module's subfolder tree.
Type	<i>Required</i>	Sets the type of module. Valid options are Runtime , RuntimeNoCommandlet , Developer , Editor , EditorNoCommandlet , and Program . This type determines which types of applications this plugin's module is suitable for loading in. For example, some plugins may include modules that are only designed to be loaded when the editor is running. Runtime modules will be loaded in all cases, even in shipped games. Developer modules will only be loaded in development runtime or editor builds, but never in shipping builds. Editor modules will only be loaded when the editor is starting up. Your plugin can use a combination of modules of different types.
LoadingPhase	<i>Optional</i>	If specified, controls when the plugin is loaded at startup. This is an advanced option that should not normally be required. The valid options are Default (which is used when no LoadingPhase is specified), PreDefault , and PostConfiginit . PostConfiginit allows the module to be loaded before the engine has finished starting up key subsystems. PreDefault loads just before the normal phase. Typically, this is only needed if you expect game modules to depend directly on content within your plugin, or types declared within your plugin's code.
WhitelistPlatforms	<i>Optional</i>	If specified, gives a list of platforms which this module will be compiled for. If not specified, the module will be compiled for all platforms.
BlacklistPlatforms	<i>Optional</i>	If specified, gives a list of platforms which this this module will not be compiled for. If not specified, the module will be compiled for all platforms.

Figure 6:

to access hardware and do the computation algorithms. To start the process, every plugin will start with the following two steps:

1. Duplicate the template plugin folder structure given by Unreal.
2. Modify the Plugin and Module Descriptors to match the new plugin.

DLL Import

With a blank plugin set up, it is pertinent to note the means by which one loads a DLL into the plugin. You will need a minimum of three things:

1. The DLL itself
2. The .h header file that declares all the functions of the DLL that you can call
3. The .lib file or import library which contains address of the header file functions in the DLL

Once those files are collected and placed in the project, once has to follow the next three steps to use the functions in the DLL:

1. In the build.cs, add the following lines:

```
PublicDelayLoadDLLs.Add("FreeImage.dll"); PublicAdditionalLibraries.Add(Path.Combine(
    "FreeImage.lib"));
```

2. In the main cpp file for the plugin, add the following:

```
DLLHandle = FPlatformProcess::GetDllHandle(*Path);
```

After all that, just include the header in any file in the plugin and call any of the DLL functions.

5 Detailed Design

5.1 Camera Design

The design of the camera module strives to implement the fundamental concept of separating interface from implementation. By defining an `ICamera` interface that handles all public access, the underlying implementation can change dramatically as long as it conforms to the contract specified by the interface. This allows for supporting additional cameras in future versions of the product as well as making camera changes should unforeseeable events occur. All these changes can happen within the camera module without the unity plugin needing to change its method calls at all.

5.1.1 ICamera Public Members

The `RealSenseCamera` has three public members. All three of its public members are implementations of the `ICamera` interface's public members. They include: `StartCapture()`, `StopCapture()`, and `GetImages()`. Each of these public members are described below.

StartCapture

The `StartCapture` method of the `RealSenseCamera` signals the class to start capturing images from the Intel® RealSense™ F200 Camera. This updates the camera's state variable to the `CameraState.RUNNING` state. The method will engage the camera capture loop which will continually capture images until otherwise notified. This notification is created by calling the `StopCapture` method described below.

StopCapture

The `StopCapture` method of the `RealSenseCamera` signals the class to stop capturing images from the Intel® RealSense™ F200 Camera. The State member variable will be changed in order to signal to the capture loop to terminate. The camera module will then finish converting and saving all images that have been captured. Image capture will not resume again until the `StartCapture` method has been called.

GetImage

Gets the next available image from the camera as a `Bitmap`. If an image is available, it will be returned. Otherwise, the function will block if the `Status` member equals `CameraStatus.RUNNING` and return the next available image once it becomes available. If the `Status` member equals `CameraStatus.STOPPED`, the method will return `null` to signal that there are no available images.

5.1.2 Concurrency

The ICamera Interface should be able to return a Bitmap image while still capturing data. This will be accomplished by placing captured images into a ConcurrentQueue<Bitmap>. When the queue reaches a certain capacity the remaining captured images will be written to a disk. As the ConcurrentQueue<Bitmap> empties the images will be read from disk and loaded back into the queue. In order to accomplish this concurrency, two threads will be needed. One thread will be used to produce data. The other thread will belong to the caller of the GetImage method and will be used to dequeue the next image, by blocking if necessary, and serve it the caller. The only resource shared between the two threads are the ConcurrentQueue<Bitmap> which will account for synchronization issues between the two.

5.2 Computer Vision Design

5.2.1 Accord.NET Framework

The Accord.NET framework is a machine learning framework written in C# for signal processing, statistics, computer audition, and computer vision applications. Accord.NET extends AForge.NET which is another popular C# machine learning framework, but Accord adds extra scientific computing features.

The libraries available in the Accord.NET framework are divided into three sections: scientific computing, signal and image processing, and support libraries. One primary namespace we will be using is Accord.MachineLearning for DecisionTrees, GaussianMixtureModel and the RANSAC implementation included [16].

Another useful namespace for this project is Accord.Math for integration techniques among other mathematical implementations that will prove useful for calculating loss minimization, refining the RANSAC pose estimation, and any other mathematical equations we incorporate into our implementation [16].

The Accord.Neuro is useful for any neural network structures. The visualization features of Accord can be used during testing, benchmarking, and development of our implementation to better show our progress and metrics [16].

Accord is made available in the NuGet package manager, making it easily integrated into our Visual Studio project environment.

5.2.2 Input from Unity Interface

Using the putImage method in the primary CVInterface class we will be importing images captured by the Intel® RealSense™ camera after it is passed through the Unity interface. These images will be read in and stored using the System.Drawing.Bitmap format. This format's pixel structure can be altered depending on the needs of the computer vision implementation.

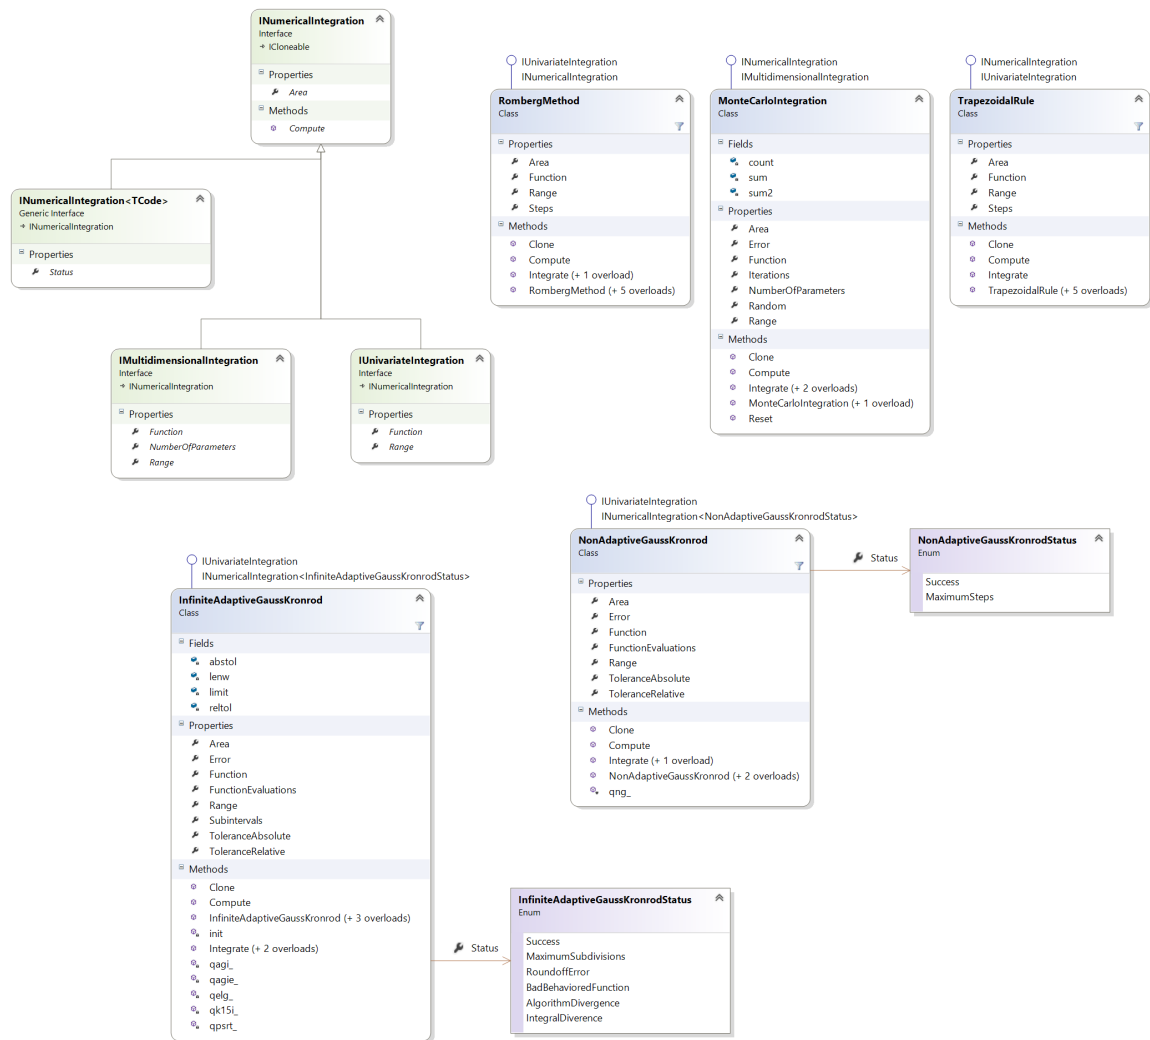


Figure 7:

5.2.3 Random Forest Implementation

Our implementation of the auto-context random forest suggested in “Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image” will be built using the `Accord.MachineLearning` namespace. More specifically the structure will be built with the `RandomForest`, `DecisionTree`, and `DecisionNode` classes. The random forest will first use the built-in learning functions for training and later be modified to more closely resemble the training of Brachmann *et al.* [8, 16].

5.2.4 RANSAC Implementation

Our random sampling consensus (RANSAC) implementation will be built to approximately mimic the implementation explained in “Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image” [8]. The `RANSAC<TModel>` class in the `Accord.NET` framework will be utilized to create our implementation [16]. This implementation will be modified to run parallel hypothesis checks to follow the structure of preemptive RANSAC.

Our instance of RANSAC will have a set of `Hypotheses` which have the pose information stored. During processing these will be culled, refined, and added to as necessary.

5.2.5 Pose Refinement Implementation

We would like to implement a similar method to Brachmann *et al.* to refine the poses gathered by RANSAC [8]. Each `Hypothesis` in the RANSAC instance will have a refinement method called `refine()` which will be able to improve the pose estimation if that hypothesis is chosen for refinement. The poses chosen for refinement will be handled within our RANSAC implementation.

5.2.6 Output to the Unity Interface

The metadata associated with each detected object will be exported to Unity in a data-structure containing the x translation, y translation, z translation, x rotation, y rotation, z rotation, scale, and the object type according to the pre-existing 3D models. The translation values will be provided according to the estimated center of the observed scene. This information will then be used to create and transform the object in a Unity scene.

5.3 Unity Design

When the user starts up Unity, they will be directed to the base Unity Editor screen which is shown right under. From there, they will have the option to go into the Window tab and select our custom screen.

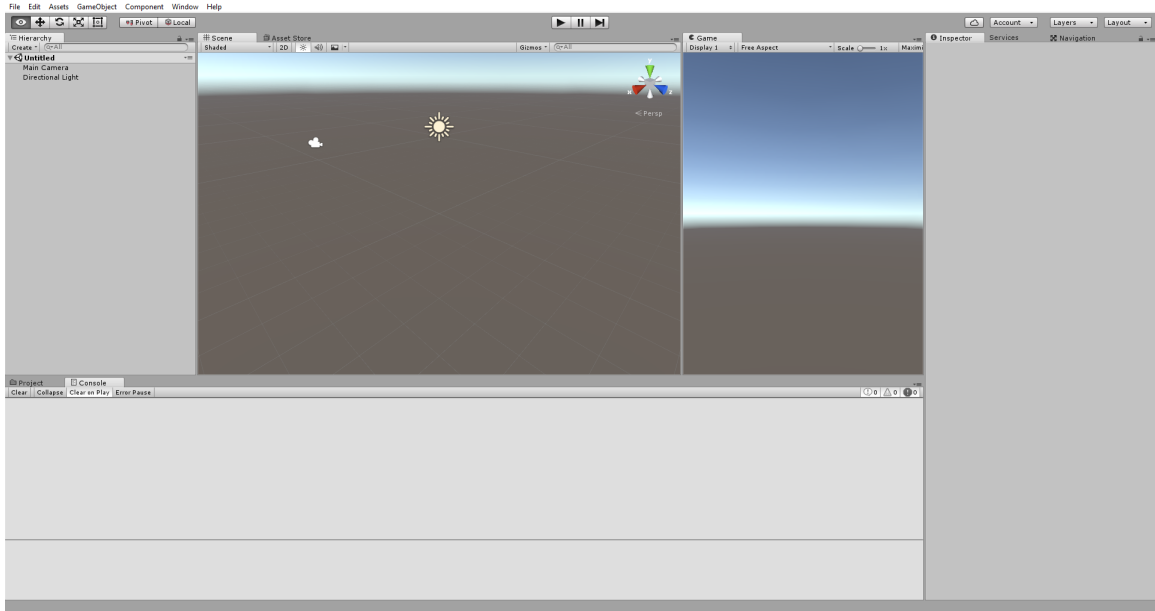


Figure 8:

5.3.1 Custom Window

The design of the Unity module will be centered around 2 different parts. The first part is the UI/central control class which will implement and create a new Unity Editor window. This window will contain the button that the user can press to begin the plugins function. On initial press of the button, the UI will call on the camera module's interface. It will wait for the camera to send images back, which it will then feed to the computer vision interface so that the computer vision module can process the images. An example of a simple custom screen and the script in the assets is shown below, without any of the functionality described above.

UI Features

While the plugin is in different stages of execution, the overall status will be translated into user-friendly terms, outputted as a string, and displayed as a label in the window. When the camera starts up, the label will display "Scanning Objects..." and will continue displaying that label until the camera software stops sending images back to the UI/Controller class. Once the images stop, the label will switch to "Processing Images..." while the computer vision module processes the scanned images into a usable format for the Object Creator. The time that it takes the Object Creator to spawn the items on the scene should be negligible enough such that a label is not needed, but should the time be noticeable, the label may be switched to "Drawing Scanned Objects" while the Object Creator executes it's task. Once the plugin's execution is finished, the UI/Controller will revert back to a ready state to potentially scan one more time.

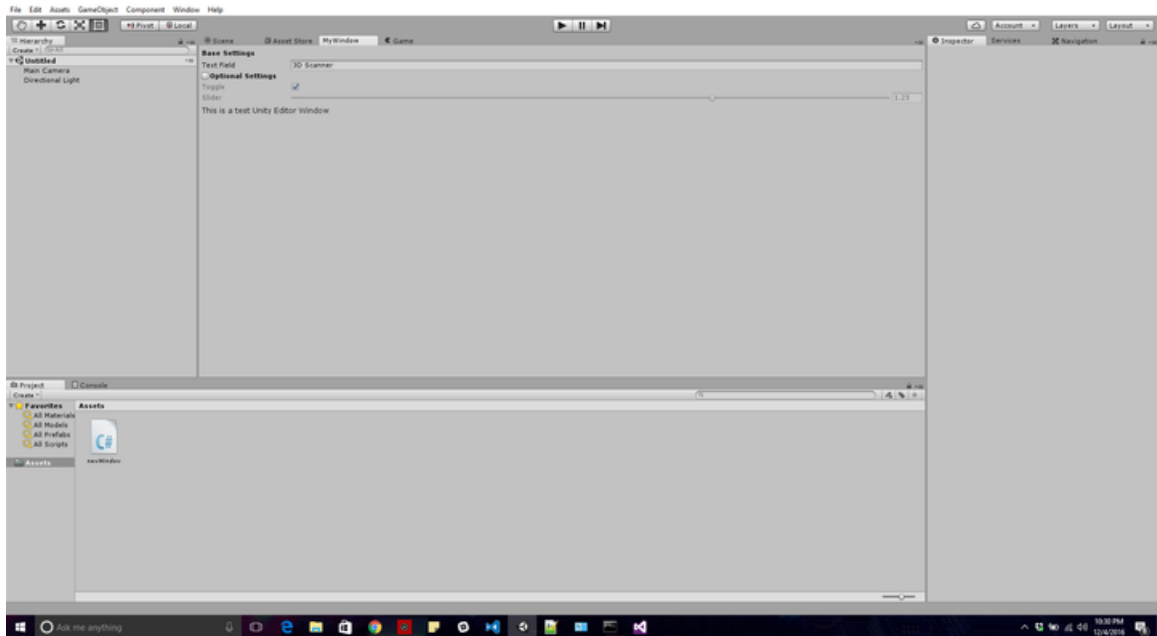


Figure 9:

Objects to Draw

The processed images will return in the form of a list comprised of type, translation, rotation, and scale. The type refers to the types of the specific objects scanned. Our implementation will call for prebuilt assets to be stored in our plugin files as prefabs that are base versions of all possible blocks that will be scanned into the Unity project. Should more block shapes be introduced into the algorithm, our sponsors have already agreed to create base models for us to use in Unity. The prebuilt objects that we already have at our disposal are:

- cubes
- cones
- cylinders
- rectangular prisms
- pyramids
- bridges
- wedges/ramps

The Translation refers to the position of the objects with respect to the origin of the world space in the Unity Scene. This attribute will determine exactly where the model is rendered in the scene. The current plan is to have a reference measurement which can be converted into Unity World Space coordinates.

The Rotation refers to the degrees around the object's 3 center axes (x, y, z) that the object is moving circularly. The rotation can go from 0 degrees up to 360 degrees (360 being the

original starting position). Unity allows users to change an object's rotation through using Euler Angles and the rotations themselves are stored in Unity as Quaternions.

The Scale refers to the size of the object with respect to the original object that it is modelled off of. For example, a cube that is twice as wide, long, and high as the normal cube used will have a scale of 2 in all directions. Having this implementation will allow for multiple block types to be used without having to restrict the user to a specific brand of blocks. The original block's scale will be saved and compared to the scanned blocks, allowing the Unity module to scale the stored prefab to whatever it needs to be.

5.3.2 Object Creator

The object creator is the class that the UI class will feed the processed object data to. This class extends Unity's MonoBehaviour and is what makes the calls to draw the objects onto the scene. Unity has a method called `Instantiate()` that allows one to instantiate prefabs through a script. The `Instantiate` method has multiple constructors that can be called to load a prefab. The one that will be mainly used in this class is:

```
public static Object Instantiate(Object original, Vector3 position,
Quaternion rotation);
```

This instantiation will allow us to set a variable equal to the newly instantiated prefab that is already set to the position and rotation necessary. From there the variable can be used to adjust the scale attribute for the newly created GameObject.

6 Design Summary

6.1 Camera Module UML

The final overall design of the camera module is displayed below. This includes the organization of the classes used as well as the flow of activities.

6.1.1 Camera Module Class Diagram

The following is the design of the Camera module. All access to the camera module is handled through the ICamera interface. This allows the commands called by the Unity Module to stay constant while the implementation of the Camera Module is free to change. The

6.1.2 Camera Module Activity Diagram

The following is the flow of activity within the class diagram. Once start has been called, the Intel® RealSense™ pipeline is initiated and will continually capture data frames until the caller has called stop. These captured frames are available via the GetImage method of the ICamera interface.

6.2 Computer Vision UML

The following UML diagram gives a general overview of the planned computer vision implementation for this project. The more fine-grained details such as parameters, methods, and types are still subject to change as development continues, but the general structure and ideas will remain the same.

6.3 Unity UML

6.4 Overview UML

7 Development Environment and Operations

7.1 IDE

We are using Microsoft Visual Studio 2015 Community Edition in order to develop our project. We chose Microsoft Visual Studio 2015 Community Edition because, it offers support for Unity Plugin development as well as excellent support for C# development. All

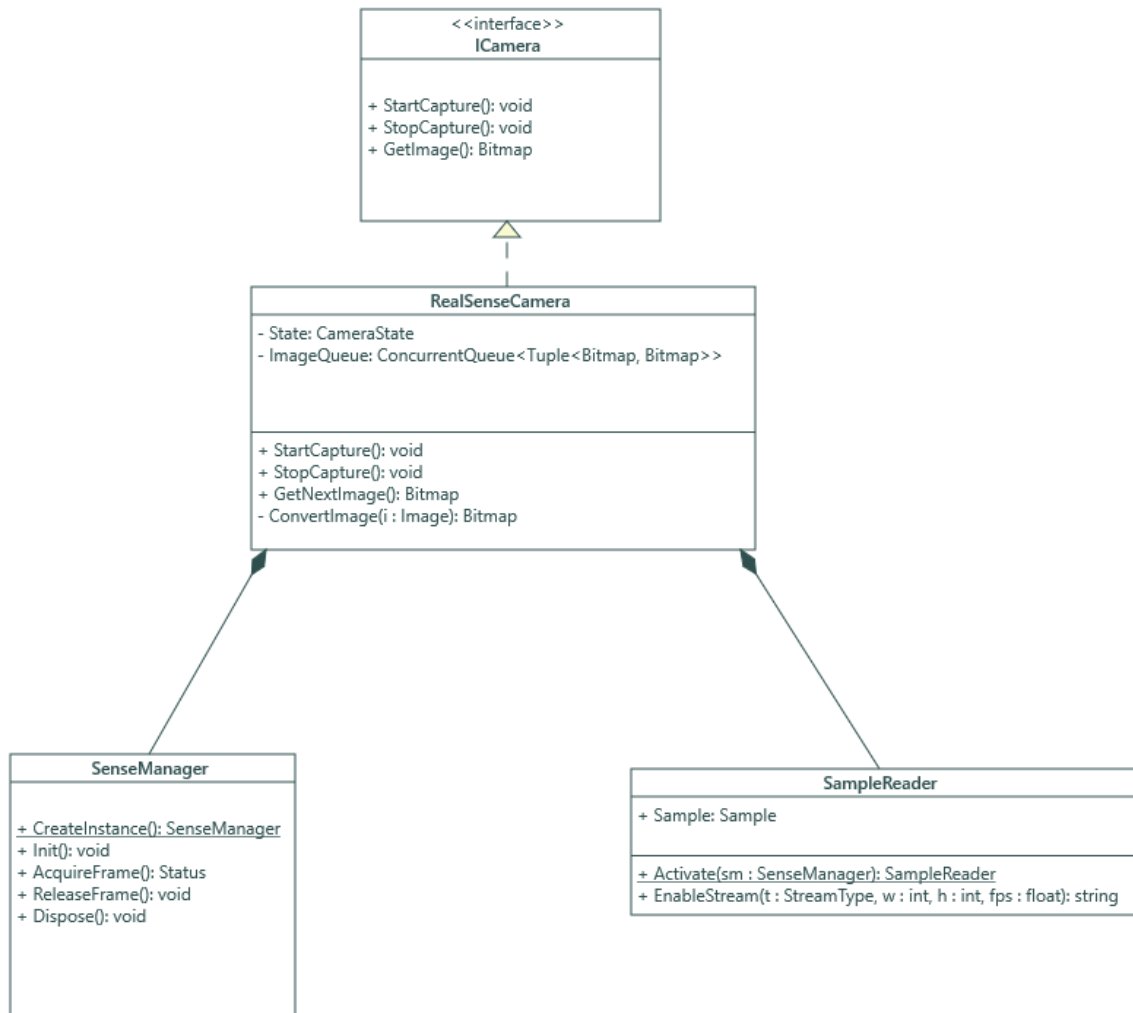


Figure 10:

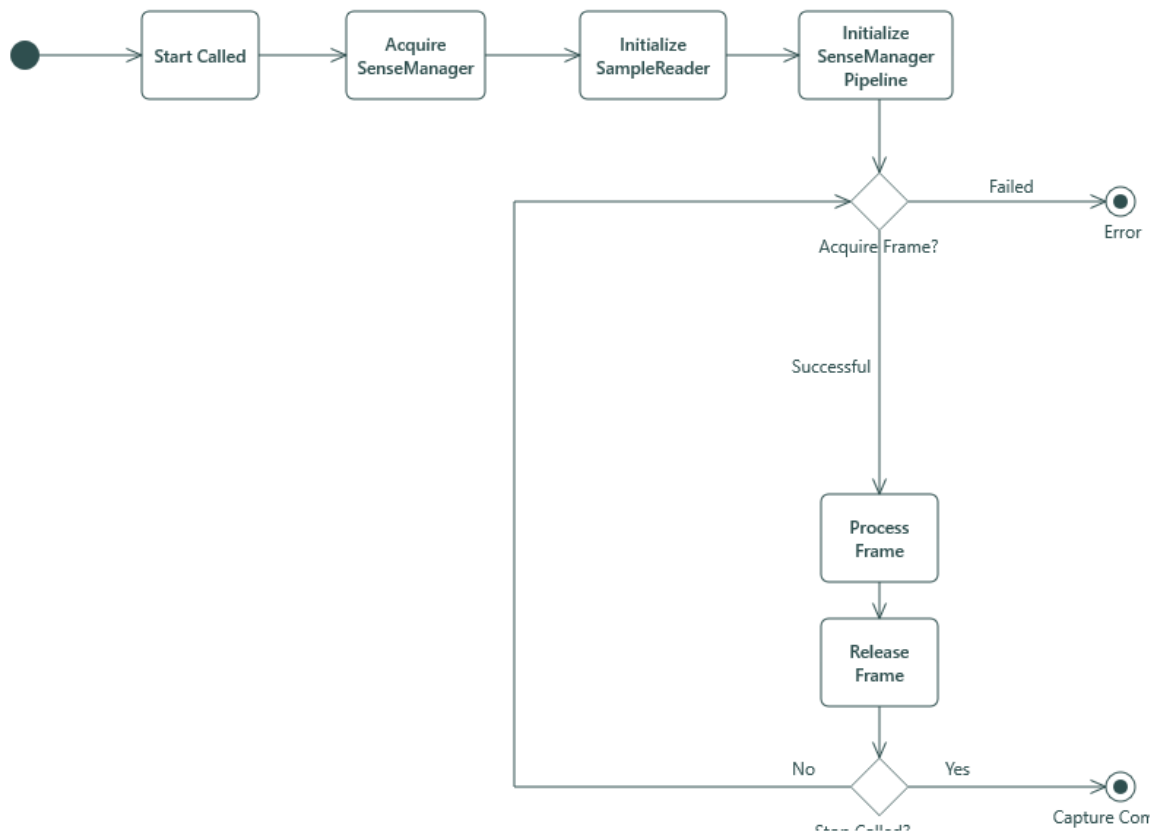


Figure 11:

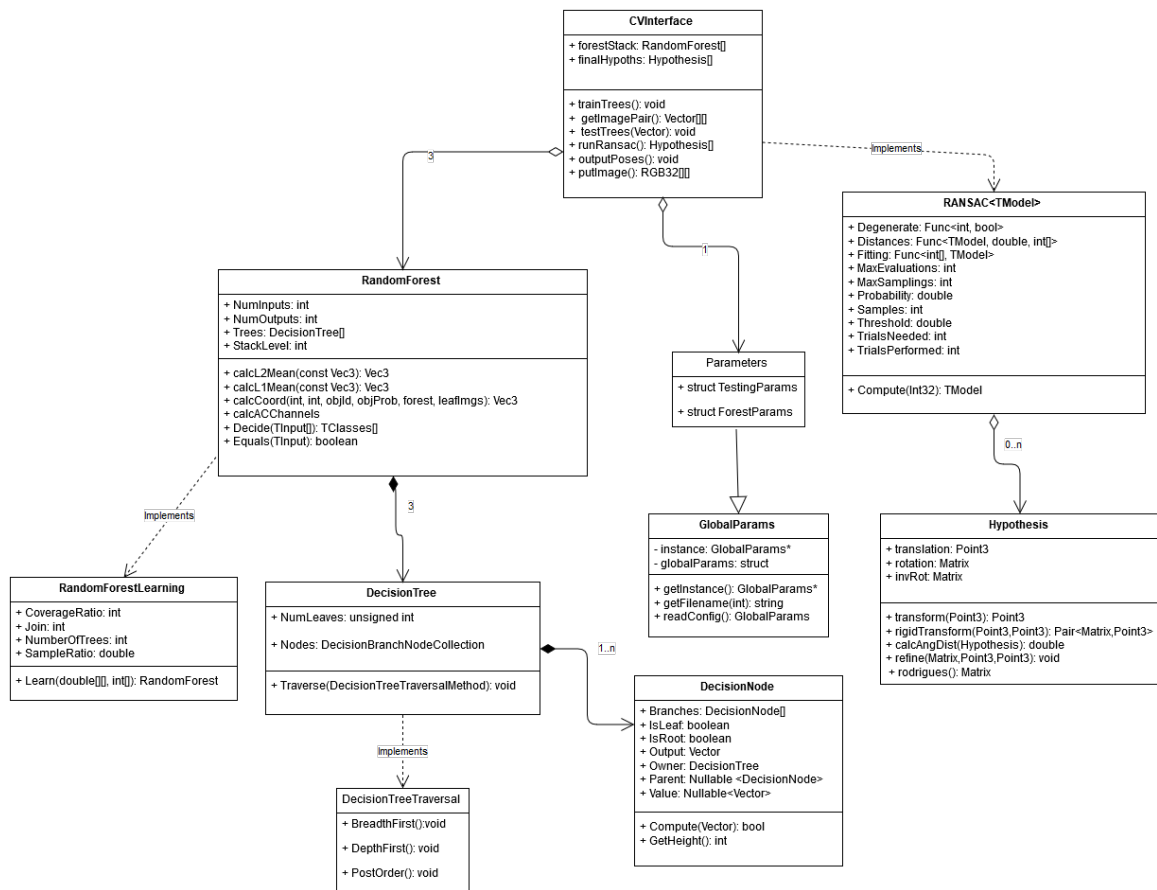


Figure 12:

the members on our team also have substantial experience with the IDE. Microsoft Visual Studio also helps to simplify the build process for multiple dependent projects. Visual Studio also features the NuGet Package Manager which is an incredibly helpful tool for adding libraries, frameworks, or dependencies to a project. The Accord.NET framework is available as a NuGet package and can be easily integrated with the Visual Studio environment. Finally Microsoft Visual Studio also has excellent integration with the Git version control system which will help facilitate rapid development by multiple authors on our team.

7.2 Version Control System

We chose to use Git as our version control system. We decided on Git due to our group members' familiarity with the system as well as its cost. All of our team members have worked with Git in the past, therefore we were able to incorporate the tool into our developer operations without any further training needed. Also since Git is free, it will not carry a cost to our sponsors or our team members. We are hosting our Git repository on GitHub. Hosting on GitHub is also free for public repositories, which we are able to use since we are not subject to a nondisclosure agreement. In addition to repository hosting, GitHub also offers some valuable tools to assist in developer coordination. We are making use of the issue tracking system within GitHub in order to coordinate the status of various features and bug fixes.

7.3 Documentation

In order to safely document our project using multiple authors, we needed to incorporate version-control-compatible formatting into this documentation's development environment. We used the Markdown mark up language in combination with Pandoc to facilitate our authoring and presentation of our documentation content.

7.3.1 Markdown

We are using Markdown for documenting purposes. Markdown is a simple plaintext format with allows for writing documents with common features such as: headers, lists, and tables. We chose to use Markdown because it is easy to version control as well as being a widespread format. Because Markdown is a plaintext format, multiple group members can work on it at the same time and Git is able to easily merge their changes. This is in contrast to a binary format such as *.docx whose line changes Git cannot merge. Also since Markdown has become such a widespread format there is plenty of tooling to support its authoring and conversion. We chose Markdown over similar formats such as LaTeX and HTML because its syntax is much simpler. This makes Markdown easy to learn as well as quick to write. Without Markdown, our documentation process would be slower and more prone to data loss.

7.3.2 Pandoc

We used to Pandoc to convert our Markdown to more presentation oriented formats. This tool allows us to easily develop, merge, and version control our documentation while also being able to support visually appealing presentation file formats such as *.docx and .pdf*. Without Pandoc we would be forced to use binary formats which would make it difficult to version control our documentation.

8 Testing Plan

8.1 CameraModule Testing

The primary aspects of the camera module that need to be tested are: the public interface and the image conversion capabilities.

8.1.1 Unit Tests

The unit tests will be used to test the behavior of each function individually in different circumstances. The parameters of each test are as follows:

- **Input** - The explicit parameters passed into each function. The value “N/A” will be used if the function takes no parameters.
- **Output** - The value which the function returns. The value “N/A” will be used if the function is void
- **Starting Conditions** - Any significant state values that should be set before the start of the test. The value “N/A” will be used if there are not any consequential initial state values.
- **Ending Conditions** - Any significant state values that should be present as a result of the method being tested. The value “N/A” will be used if there are not any consequential state values.

StartCapture

The job of the StartCapture method is to signal to the rest of the RealSenseCamera that capture should begin. This starts the capture loop and updates the State member to CameraState.RUNNING.

Input	Output	Starting Conditions	Ending Conditions
N/A	N/A	State == CameraState.STOPPED	State == CameraState.RUNNING

StopCapture

The job of the StopCapture method is simply to signal to the rest of the RealSenseCamera class that the capture should halt. This is used to signal to the capture loop to terminate execution.

Input	Output	Starting Conditions	Ending Conditions
N/A	N/A	State == CameraState.RUNNING	State == CameraState.STOPPED

ConvertImage

The only way to objectively test the ConvertImage method is to procedurally generate Image objects from the Intel® RealSense™ SDK as input for the ConvertImage method. A brief description of the attributes are below:

- **TestRSImage1** - All pixels are set to black
- **TestRSImage2** - Simple white background with black text in the foreground
- **TestRSImage3** - Picture of the table with blocks

The test would make sure that the Bitmap (denoted as ImageGeneratingBitmap#) that was used to produce the Intel® RealSense™ SDK Image objects (denoted as TestRSImage#) are what the ConvertImage method produces.

Input	Output	Starting Conditions	Ending Conditions
TestRSImage1	ImageGeneratingBitmap1	N/A	N/A
TestRSImage2	ImageGeneratingBitmap2	N/A	N/A
TestRSImage3	ImageGeneratingBitmap3	N/A	N/A

8.2 Computer Vision Testing

8.2.1 Benchmark Testing

We will be using the CVPR 2016 code included with “Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image” as a benchmark for our computer vision interface. We would like to track metrics on our training and detection processes to attempt to get as close as possible to the results of Bachmann *et al.*.

On the Hinterstoisser dataset Bachmann *et al.* achieved 82.1% accuracy when estimating 3D 6-DOF pose with a maximum re-projection error for all vertices of 5cm and a maximum rotation error of 5°. Processing time was calculated at a maximum of 1 second for 13 objects, nearly 2 seconds for 25 objects and nearly 4 seconds for 50 images []. The issue with utilizing processing time is that the authors mention that processing time can broadly vary with hypothesis acceptance. If it is more difficult to accept a hypothesis, the processing time increases. We will mitigate this risk by testing both their implementation and our implementation on the same data after being trained on the same dataset and compare those recorded processing times. Their processing times and prediction-recall graph are pictured below in figure 5 from [].

The primary classes for benchmark testing in the CVPR 2016 implementation of “Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image” are `train_trees` and `test_pose_estimation`. `train_trees` monitors training time by using the `stopWatch` function for accurate time tracking and in `test_pose_estimation` the average RANSAC runtime, the average auto-context random forest runtime, and the

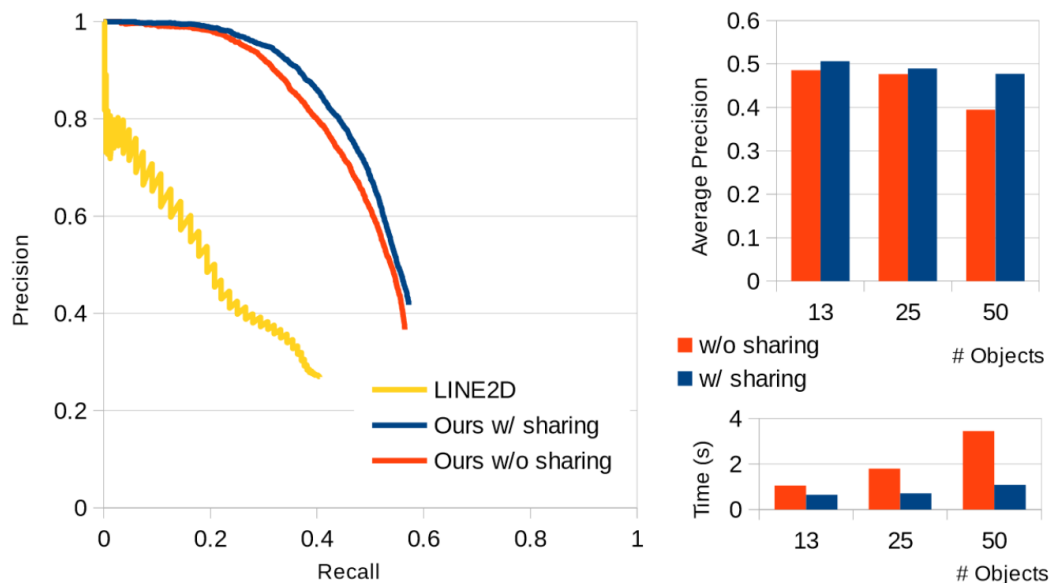


Figure 13:

evaluation results are given in `avgRansacTime`, `avgForestTime`, and `objEval` respectively. We will use these recorded measures on different datasets, beginning with the Hinerstoisser dataset, as targets for our implementation running on the same datasets.

8.2.2 Accord Framework Unit Tests

The Accord.NET framework includes some unit tests for each major namespace to allow the user to verify the integrity of the framework. We will run the unit tests for each namespace we will be utilizing to ensure that they are functioning as expected [16].

Test	Namespace
------	-----------

Validate full namespace	Accord.Tests.MachineLearning	Test Decision Tree	Accord.Tests.MachineLearning
Test Decision Tree Rules	Accord.Tests.MachineLearning	Test Random Forest	Accord.Tests.MachineLearning
Test Decision Tree C45 Learning	Accord.Tests.MachineLearning	Test RANSAC	Accord.Tests.MachineLearning
Test Matrix Math	Accord.Tests.Math	Test Point3	Accord.Tests.Math
Test Integrals	Accord.Tests.Math	Test Monte Carlo Integration	Accord.Tests.Math

8.2.3 Unit Testing

The first set of computer vision tests will begin in late December 2016 and continue through early January 2017. These tests will consist of integrity verification of the Accord.NET framework. We will ensure that the framework is performing as expected and the desired data-structures are built, modified, and run as efficiently as the team expects. Sample code included with the framework will be compiled and run for each of the major features to be implemented in the computer vision interface of our project.

Date	Test Purpose	Expected Outcome
Mar. 2017	Fully Functioning RANSAC	RANSAC runs on real data gathered from the Random Forest.
Apr. 2017	RANSAC Performance Benchmarking	RANSAC runs with comparable measurements to stat-of-the-art methods.

Random Forest Tests

Date	Test Purpose	Expected Outcome
Dec. 2016 - Jan. 2017	Verify Accord Random Forests	Sample code runs and performs as advertised.
Feb. 2017	Random Forest Training Test	Ensure RFs can be trained using built-in Learn() method.
Mar. 2017	Random Forest Testing	Forest is trained and can be used for predictions on image input with appropriate leaf values.
Apr. 2017	Random Forest Performance Benchmarking	Forest should be used for object predictions in reasonable time and with sufficiently accurate leaf values when compared to state-of-the-art methods.

Input Tests

Date	Test Purpose	Expected Outcome
Jan. 2017	Get an Image	Receive an image from the camera interface in the correct format.
Feb. 2017	Get a Series of Images	Receive multiple images at an appropriate rate according to processing time estimates.
Mar. 2017	Camera Angle Tests	Ensure the optimal camera setup for pitch and distance to receive the best results from the algorithm.

Output Tests

Date	Test Purpose	Expected Outcome
Jan. 2017	Output a Structure	Output a data-structure to Unity holding placeholder data.
Mar. 2017	Output Real Data	Output pose information gathered in RANSAC into the Unity interface.

8.3 Unity Testing

Date	Test Purpose	Expected Outcome
Jan. 2017	UI Button and Label Tests	Change labels and button text as the UI state changes.

Date	Test Purpose	Expected Outcome
Jan. 2017	Camera Output	Test main UI class calls to camera and that it receives camera output correctly.
Feb. 2017	Object Creation	Instantiate object prefabs with mock input and have them show up on screen.
Mar.. 2017	CV Data Tests	Test Object Creator with data output from cv module.

8.4 Integration Testing

As mentioned in the above test cases, by January 2017, when we have access to the necessary hardware for testing, the camera interface will be able to output an image in a bitmap format to the Unity interface. The Unity interface will then receive the input image data from the camera interface and send it to the computer vision interface. The computer vision interface will then output placeholder information into the Unity interface, completing the flow of data in our application. This will allow us to begin integration tests.

9 Budget and Resources Provided by Sponsors

Our sponsors did not specify a specific dollar amount for our budget but our possible costs are highly controlled. The UCF Games Research Group has many resources available for our team to utilize for this project. All possible costs or necessary resources are described below.

9.1 Cameras

The Intel® RealSense™ F200 was already available to the UCF Games Research Group. Therefore the use of the camera will not carry a cost to our group. The only potential cost the camera could pose is if we find the Intel® RealSense™ F200 camera to be unusable and we have to use a camera that the UCF Games Research Group does not already have in their possession. They also have a Microsoft Kinect, Microsoft Hololens, and an HTC Vive.

9.2 Working Area

The UCF Games Research Group has an office space with computers, cameras, and space for team collaboration. This area provides ample space for our team to work with the cameras and a table with objects placed on it.

9.3 Expert Consultation

Under the UCF Games Research group, we have contact with students and experts in various fields that can be useful for help with the development process. We have access to the following:

- Unity experts to consult in order to learn and work with the intricacies of the Unity Software.
- 3D models to create assets that may be required for the process of instantiating the models within the Unity Platform

10 Challenges

10.1 Computer Vision Algorithmic Complexities

The Computer Vision problem that our team is working through is still part of a very active field of research. With this in mind, the members of our team who will be focusing on the Computer Vision interface will need to at least partially catch up to this active field in order to successfully implement a useful algorithm. Our team will be using utilizing an already established paper to implement a proven algorithm so we don't use a large amount of our time becoming experts at computer vision rather than completing the project.

10.2 Realistic Goals and Requirements

The project sponsors had a broad idea for a project, in which a user imports real-life blocks into Unity. That being said, the actual requirements of the project were left up to our team to figure out. This is a difficult challenge for our whole team because it is not trivial to decide our limitations, such as:

- Deadline to completion
- Amount of time available per week due to other responsibilities
- Problem complexity and possibility

A priority goal this semester was seeking a means to mitigate this challenge by extensive planning.

10.3 Inexperience with Necessary Tools and Libraries

There are many technologies that we must use and interface with in order to complete this project. With regards to these technologies, our teams experience is generally very low. In the first half of development with this project, our team has sought to gain experience with these technologies so that implementation from this point on can go smoothly.

11 Milestones

11.0.1 October 2016 - Run and test Bachmann implementation

Compile on Ubuntu 14.04 and run the source code provided with the CVPR 2016 demo for “Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image”[1]. Resolve any dependency issues involved with nlopt, PNG++, or OpenCV.

Status: Completed Successfully

11.0.2 November 2016 - Train Bachmann implementation on ‘Dummy Data’ and test on test set

Run `train_trees` on the data included in the ‘dummy_data’ folder. If training is successful test on the included test sets.

Status: Completed Successfully

11.0.3 December 2016 - Final Documentation

Complete the final documentation for the planning of this project

Status: Completely Successfully

11.0.4 January 2017 - Set up Accord Framework

Perform unit tests for the Accord framework in Visual Studio. All necessary tests include Gaussian Mixture Model sample testing, RANSAC sample testing, Accord.Math namespace testing and Random Forest testing. We must ensure the framework integrity before continuing.

Status: In Progress

11.0.5 January 2017 - Camera Module Implemented

The camera module should be written and functional. All unit tests should have passed and the public interface should be returning correct values.

Status: In Progress

11.0.6 January 2017 - Train Bachmann implementation on real data and test

Run `train_trees` on either the Hinterstoisser dataset or the Object Segmentation Database to set a benchmark to test against.

Status: Pending

11.0.7 January 2017 - Run Accord Samples

Compile, run, and test the included samples of both RANSAC and the random forest implementation. Ensure that there are no errors and both of these run as expected. There are known issues with the latest NuGet package containing a bug that greatly decreases the accuracy of the forest. Rollback to the 3.3.0 NuGet build if necessary.

Status: Pending

11.0.8 January 2017 - Working UI

Create and design the custom Unity window where the users will be activating the app. Have it tested to make sure it puts the right labels for the correct states.

Status: Pending

11.0.9 February 2017 - Computer Vision Progress

The progress of our computer vision system in February should include a basic implementation of a trainable Random Forest structure as well as a testable RANSAC implementation.

Status: Pending

11.0.10 February 2017 - Object Creator

Working instance of the Object Creator class that is linked to the UI and can create all of the object prefabs in any order that they come in.

Status: Pending

11.0.11 March 2017 - Computer Vision System

Our computer vision system should function and make predictions by March. The system will need tweaking to approach our benchmark measurements.

Status: Pending

11.0.12 April 2017 - Computer Vision Finalized

The computer vision system will be in its final state in April. The system should make predictions reasonably with measurements close to those of our benchmark.

Status: Pending

12 Summary

TODO: Add Summary

13 Appendices

Request of Permission to Reprint Images



Eric Brachmann <eric.brachmann@tu-dresden.de>
Today, 4:39 AM




Hi Christopher,

from our side that's ok. But to be sure you would have to check the ICCV and CVPR guidelines whether your plan violates any rights of their publishers. Furthermore the figures of both papers contain images from the dataset of Hinterstoisser et al., so you would have to ask them, too.

Kind regards,
Eric



Christopher Williams
Yesterday, 11:09 AM
eric.brachmann@tu-dresden.de



Sent Items

Mr. Brachmann,

I would like to request permission to reprint figures and equations presented in your CVPR 2016 paper "Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image" (specifically figures 2, 4, 5 and equations 1, 3, 4, 5) as well as figure 2 from your "Learning Analysis-by-Synthesis for 6D Pose Estimation in RGB-D Images" 2015 paper. If permission is given I plan to use these figures in documentation for a senior design project at the University of Central Florida. If you would like more information about the project in question please feel free to ask.

Thank you,
Christopher Williams
Undergraduate Student, University of Central Florida

Permission to reprint dataset images




Stefan Hinterstoisser <stefan.hinterstoisser@gmail.com>
Today, 11:47 AM



Hi Christopher, sure please go ahead!best stefan



Christopher Williams
Today, 10:20 AM
hinterst@in.tum.de



Sent Items

Dr. Hinterstoißer,

I would like to request permission to reprint images from your ACCV 2012 paper "Model Based Training, Detection and Pose Estimation of Texture-Less 3D Objects in Heavily Cluttered Scenes". These images include figure 3 in your paper as well as figures including your dataset images found in a paper from Brachmann et al. "Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image".

These images would be included in senior design documentation for my group at the University of Central Florida. I greatly appreciate any response.

Thank you,

Christopher Williams
Undergraduate Student,
University of Central Florida

accord-framework.net/docs/html/R_Project_Accord_NET.htm

Search

Accord.Statistics.Models.Fields.Learning

Contains learning algorithms for CRFs and HCRFs, such as *Conjugate Gradient*, *L-BFGS* and *IRprop*-based learning.

Accord.Statistics.Models.Markov

Contains classes related to Hidden Markov Models and their learning algorithms. Offers support for both discrete and continuous-density models, as well as Markov classifiers and threshold models for sequence rejection.

Accord.Statistics.Models.Markov.Hybrid

Accord.Statistics.Models.Markov.Learning

Contains learning algorithms such as Baum-Welch.

Accord.Statistics.Models.Markov.Topology

Contains topologies for HMMs, such as Forward-only and Ergodic topologies.

Accord.Statistics.Models.Regression

Contains statistical regression models such as logistic and linear regressions.

Accord.Statistics.Models.Regression.Fitting

Fitting (learning) algorithms for regression models, such as the Iterative Reweighted Least Squares for standard logistic regressors and the Lower-Bound approximator for multinomial logistic regression.

Accord.Statistics.Models.Regression.Linear

Linear statistical regression models such as simple, polynomial, multiple and multivariate linear regressions.

Accord.Statistics.Moving

Contains classes to estimate moving statistics, i.e. statistics computed within a time frame window.

Accord.Statistics.Running

Contains classes to estimate running statistics, i.e. statistics which should be computed and updated as soon as new data becomes available.

Accord.Statistics.Testing

Contains 34+ statistical hypothesis tests, including *one way* and *two-way ANOVA tests*, non-parametric tests such as the *Kolmogorov-Smirnov test* and the *Sign Test for the Median*, contingency table tests such as the *Kappa test*, including variations for multiple tables, as well as the *Bhaskar and Bowker tests* and the more traditional *Chi-Square*, *Z*, *F*, *T* and *Wald tests*.

Accord.Statistics.Testing.Power

Contains methods for power analysis of several related hypothesis tests, including support for automatic sample size estimation.

Accord.Statistics.Visualizations

Contains classes for statistical visualization such as Histograms and Scatterplots.

Accord.Video

Access and process video using files, streams and image sequences.

Accord.Video.DirectShow

Access video files (.avi, .wmv) and capturing devices (webcam) using DirectShow.

Accord.Video.FFMPEG

Accord.Video.Kinect

Access and control RGB and Depth cameras from Microsoft Kinect devices.

Accord.Video.VFW

Access video files (.avi, .wmv) using Video For Windows (VFW).

Accord.Video.Ximea

Capture images from XIMEA cameras.

Accord.Vision

Real-time face detection and tracking, as well as general methods for detecting, tracking and transforming objects in image streams. Contains cascade definitions, Camshift and Dynamic Template Matching trackers.

Accord.Vision.Detection

Contains object detectors such as the Viola-Jones (Haar feature) method. The Haar cascades are completely compatible with OpenCV generated definitions and the assembly comes with direct support for bundled definitions for face and nose templates.

Accord.Vision.Detection.Cascade

Built-in Haar cascade definitions to use with the Haar feature object detector. Those definitions can be called directly from code without need for loading XML files.

Accord.Vision.Motion

Accord.Vision.Tracking

Contains classes for object tracking. Include the Camshift algorithm, color segmentation-based trackers and dynamic template matching trackers.

ZedGraph

Accord.NET Framework © 2009-2016. All documentation is licensed under the Creative Commons Attribution/Share-Alike License.
Send comments on this topic to feedback@accord-framework.net

re: Unity inquiry -assets online

David Della Rocca to me

Dec 5

Hello Brandon,

Thank you for your recent outreach to Unity. Regarding your inquiry on the use of assets posted online. If they are noted as free resources, then yes you may use them in your project. Was there something particular you were seeking?

...

me to David


Dec 5


Good Morning David,

There are three assets that I was mainly interested in. The first would be a slightly refactored copy of the table found at https://store.unity.com/?_ga=1.111316801.456177008.1475407463 which delineates the differences between the Unity tiers. The other two are screenshots, one of the Unity editor's main page and the other is of an example custom editor window. I've attached both to this email just in case. The chart will be used in our documents "Unity Research" section while the screenshots will be used in our "Detailed Design" section to help any readers recreate our project if necessary. Our document requirements list a need for an appendix section with statements from companies/people who's assets we are using in our paper allowing us to use them, I'm just not entirely sure if these specific instances require that.

The paper itself is still a work in progress so if possible, I would like to also keep an open dialogue for potential future questions regarding this topic.

...





David Della Rocca to me

Dec 5

Hi there,

If you are simply creating tables etc. you should be fine.

...

Kinect SDK Reference



Developer Network

This document is provided "as-is". Information and views expressed in this document, including URL and other Internet Web site references, may change without notice. This document does not provide you with any legal rights to any intellectual property in any Microsoft product or product name. You may copy and use this document for your internal, reference purposes. You may modify this document for your internal, reference purposes. © 2016 Microsoft. All rights reserved. Terms of Use (<https://msdn.microsoft.com/cc300389.aspx>) | Trademarks (<http://www.microsoft.com/library/toolbar/3.0/trademarks/en-us.mspx>)

Table Of Contents

Kinect SDK Reference

[WindowsPreview.Kinect Namespace](#)
[AudioBeam](#)
[AudioBeamFrame](#)
[AudioBeamFrameArrivedEventArgs](#)
[AudioBeamFrameList](#)
[AudioBeamFrameReader](#)
[AudioBeamFrameReference](#)
[AudioBeamSubFrame](#)
[AudioBodyCorrelation](#)
[AudioSource](#)
[Body](#)
[BodyFrame](#)
[BodyFrameArrivedEventArgs](#)
[BodyFrameReader](#)
[BodyFrameReference](#)
[BodyFrameSource](#)
[BodyIndexFrame](#)
[BodyIndexFrameArrivedEventArgs](#)
[BodyIndexFrameReader](#)
[BodyIndexFrameReference](#)
[BodyIndexFrameSource](#)
[ColorCameraSettings](#)
[ColorFrame](#)
[ColorFrameArrivedEventArgs](#)
[ColorFrameReader](#)
[ColorFrameReference](#)
[ColorFrameSource](#)
[CoordinateMapper](#)
[CoordinateMappingChangedEventArgs](#)
[DepthFrame](#)
[DepthFrameArrivedEventArgs](#)
[DepthFrameReader](#)
[DepthFrameReference](#)
[DepthFrameSource](#)
[FrameCapturedEventArgs](#)
[FrameDescription](#)
[InfraredFrame](#)
[InfraredFrameArrivedEventArgs](#)
[InfraredFrameReader](#)
[InfraredFrameReference](#)
[InfraredFrameSource](#)
[IsAvailableChangedEventArgs](#)

KinectSensor
LongExposureInfraredFrame
LongExposureInfraredFrameArrivedEventArgs
LongExposureInfraredFrameReader
LongExposureInfraredFrameReference
LongExposureInfraredFrameSource
MultiSourceFrame
MultiSourceFrameArrivedEventArgs
MultiSourceFrameReader
MultiSourceFrameReference
CameraIntrinsics
CameraSpacePoint
ColorSpacePoint
DepthSpacePoint
Joint
JointOrientation
Vector4
Activity
Appearance
AudioBeamMode
ColorImageFormat
DetectionResult
Expression
FrameCapturedStatus
FrameEdges
FrameSourceTypes
HandState
JointType
KinectAudioCalibrationState
KinectCapabilities
TrackingConfidence
TrackingState

Kinect SDK Reference

WindowsPreview.Kinect Namespace

Contains the types and members in the WindowsPreview.Kinect namespace.

Classes

Name	Description
AudioBeam	Represents an audio beam.
AudioBeamFrame	Represents an audio beam frame.
AudioBeamFrameArrivedEventArgs	Arguments for the audio related FrameReady events.
AudioBeamFrameList	Represents a list of audio beam frames.
AudioBeamFrameReader	Represents an audio beam frame reader.
AudioBeamFrameReference	Represents an audio frame reference.
AudioBeamSubFrame	Represents an audio beam sub frame.
AudioBodyCorrelation	Represents a correlation between an audio frame and a unique body tracking id.
AudioSource	Represents an audio frame source.

Body	Represents a body.
BodyFrame	Represents a frame that contains all the computed real-time tracking information about people that are in view of the sensor.
BodyFrameArrivedEventArgs	Represents the arguments for a body frame reader's FrameArrived event.
BodyFrameReader	Represents a reader for body frames.
BodyFrameReference	Represents a reference to an actual body frame.
BodyFrameSource	Represents a source of body frames from a KinectSensor.
BodyIndexFrame	Represents a frame that indicates which depth or infrared pixels belong to tracked people and which do not.
BodyIndexFrameArrivedEventArgs	Represents the arguments for a body index frame reader's FrameArrived event.
BodyIndexFrameReader	Represents a reader for body index frames.
BodyIndexFrameReference	Represents a reference to an actual body index frame.
BodyIndexFrameSource	Represents a source of body index frames from a KinectSensor.
ColorCameraSettings	Represents the settings of the color camera.
ColorFrame	Represents a color frame from the ColorFrameSource of a KinectSensor.
ColorFrameArrivedEventArgs	Represents the arguments for a color frame reader's FrameArrived event.
ColorFrameReader	Represents a reader for color frames.
ColorFrameReference	Represents a reference to an actual color frame.
ColorFrameSource	Represents a source of color frames from a KinectSensor.

CoordinateMapper	Represents the mapper that provides translation services from one type of point to another.
CoordinateMappingChangedEventArgs	Represents the arguments for a coordinate mapping's <code>CoordinateMappingChanged</code> event.
DepthFrame	Represents a frame where each pixel represents the distance (in millimeters) of the closest object seen by that pixel.
DepthFrameArrivedEventArgs	Represents the arguments for a depth frame reader's <code>FrameArrived</code> event.
DepthFrameReader	Represents a reader for depth frames.
DepthFrameReference	Represents a reference to an actual depth frame.
DepthFrameSource	Represents a source of depth frames from a <code>KinectSensor</code> .
FrameCapturedEventArgs	Represents the arguments for a frame source's <code>FrameCaptured</code> event.
FrameDescription	Represents the properties of an image frame from the <code>KinectSensor</code> .
InfraredFrame	Represents a frame that provides a view of the scene that looks just like a black and white photograph, but is actively lit, so brightness is consistent regardless of location and room brightness.
InfraredFrameArrivedEventArgs	Represents the arguments for an infrared frame reader's <code>FrameArrived</code> event.
InfraredFrameReader	Represents a reader for infrared frames.
InfraredFrameReference	Represents a reference to an actual infrared frame.
InfraredFrameSource	Represents a source of infrared frames from a <code>KinectSensor</code> .
IsAvailableChangedEventArgs	Represents the arguments for a <code>KinectSensor</code> 's <code>IsAvailableChanged</code> event.

KinectSensor	Represents a KinectSensor device.
LongExposureInfraredFrame	Represents a long exposure infrared frame.
LongExposureInfraredFrameArrivedEventArgs	Represents the arguments for a long exposure infrared frame reader's FrameArrived event.
LongExposureInfraredFrameReader	Represents a reader for long exposure infrared frames.
LongExposureInfraredFrameReference	Represents a reference to an actual long exposure infrared frame.
LongExposureInfraredFrameSource	Represents a source of long exposure infrared frames from a Kinect sensor.
MultiSourceFrame	Represents a multi source frame from the KinectSensor.
MultiSourceFrameArrivedEventArgs	Represents the arguments for a multi source frame reader's FrameArrived event.
MultiSourceFrameReader	Represents a reader for multi source frames.
MultiSourceFrameReference	Represents a reference to an actual multi source frame.

Structures

Name	Description
CameraIntrinsics	Represents the calibration data for the depth camera.
CameraSpacePoint	Represents a 3D point in camera space (in meters). The origin point (0,0,0), of the coordinate system is the camera position.
ColorSpacePoint	Represents a 2D point in color space, expressed in pixels.
DepthSpacePoint	Represents pixel coordinates within a depth image.
Joint	Represents the position of a joint of a body.
JointOrientation	Represents the orientation of a joint of a body.

Vector4	Represents a 4D vector.
---------	-------------------------

Enumerations

Name	Description
Activity	The activity in which a body may be engaged.
Appearance	Appearance characteristics a body may exhibit.
AudioBeamMode	Types of audio beam angle determination.
ColorImageFormat	The available color image formats.
DetectionResult	Gesture detection result options.
Expression	User expressions. Expression functionality is not supported for Kinect for Windows apps. This enumeration is included to support cross-compilation with the Xbox SDK.
FrameCapturedStatus	Captured frame status options.
FrameEdges	Identifies if the user's body is visible by indicating any portion of the user that is not in the camera's field of view.
FrameSourceTypes	The types frame sources for a MultiSourceReader.
HandState	Possible hand states.
JointType	Joint types in a skeleton.
KinectAudioCalibrationState	Specifies the Kinect for Windows sensor audio calibration states.
KinectCapabilities	Capabilities of the Kinect sensor.
TrackingConfidence	Specifies the confidence level of a body's tracked attribute.
TrackingState	The state of tracking a body or body's attribute.

AudioBeam Class

Represents an audio beam.

Syntax

C#

```
public sealed class AudioBeam : INotifyPropertyChanged
```

Members

AudioBeam has the following members.

Properties

Name	Description
AudioBeamMode	Gets or sets the audio beam mode, which determines the type of beam angle.
AudioSource	Gets the audio source.
BeamAngle	Gets or sets the beam angle, which is the direction that the sensor is actively listening.
BeamAngleConfidence	Gets the confidence in the beam angle; the range is [0.0, 1.0], where 1 is the highest possible confidence.
RelativeTime	Gets the relative time of this frame.

Methods

Name	Description
OpenInputStream	Opens the input stream. The input stream is a mono 32-bit IEEE floating point PCM stream sampled at 16 kHz. Typical PCM values will be between -1 and +1.

Events

Name	Description
PropertyChanged	Occurs when a property of the AudioBeam class changes.

Remarks

To capture audio, the sensor receives sounds from every direction. However, like the cone of light from a lighthouse where the light is the brightest, the audio capture hardware has an imaginary cone that is able to capture audio signals the best. Audio waves that propagate through the length of the cone can be separated from audio waves that travel across the cone. If you point the cone in the direction of the audio that your application is most interested in capturing, you can improve the ability to capture and separate that audio source from other competing audio sources. Therefore, use the beam angle to set the direction of the imaginary cone to improve your ability to capture a specific audio source.

Similar to the sound source angle, the beam angle is also defined in the x-z plane of the sensor perpendicular to the z-axis. The beam angle and the sound source angle are both updated continuously once the sensor has started streaming audio data (when the Start method is called).

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

AudioBeamFrame Class

Represents an audio beam frame.

Syntax

C#

```
public sealed class AudioBeamFrame : IDisposable
```

Members

AudioBeamFrame has the following members.

Properties

Name	Description
AudioBeam	Gets the audio beam.
AudioSource	Gets the audio source for this frame.
Duration	Gets the duration of the audio beam frame.
RelativeTimeStart	Gets the time the audio beam frame started.
SubFrames	Gets the audio beam sub frames.

Methods

Name	Description
Close	Releases system resources associated with the audio beam frame.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

AudioBeamFrameArrivedEventArgs Class

Arguments for the audio related FrameReady events.

Syntax

C#

```
public sealed class AudioBeamFrameArrivedEventArgs
```

Members

AudioBeamFrameArrivedEventArgs has the following members.

Properties

Name	Description
FrameReference	Gets the frame reference.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

AudioBeamFrameList Class

Represents a list of audio beam frames.

Syntax

C#

```
public sealed class AudioBeamFrameList :  
    IReadOnlyList<AudioBeamFrame>, IEnumerable<AudioBeamFrame>,  
    IDisposable
```

Members

AudioBeamFrameList has the following members.

Properties

Name	Description
Size	Gets the size of the audio beam list.

Methods

--	--

Name	Description
Close	Releases system resources associated with the audio beam frame list.
First	Gets the head frame in the audio beam frame list.
GetAt	Retrieves an audio beam frame at a specified index in the list.
GetMany	Retrieves the audio beam frames that start at the specified index in the audio beam frame list.
IndexOf	Retrieves the zero-based index of the first occurrence of the specified audio beam frame in the audio beam frame list.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

AudioBeamFrameReader Class

Represents an audio beam frame reader.

Syntax

C#

```
public sealed class AudioBeamFrameReader : IDisposable,
    INotifyPropertyChanged
```

Members

AudioBeamFrameReader has the following members.

Properties

Name	Description
AudioSource	Gets the audio source of the frame reader.
IsPaused	Gets or sets a boolean that indicates if this reader is paused.

Methods

Name	Description
AcquireLatestBeamFrames	Gets the latest audio beam frames.
Close	Closes and releases system resources associated with the audio beam frame reader.

Events

Name	Description
FrameArrived	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the AudioBeamFrameReader class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

AudioBeamFrameReference Class

Represents an audio frame reference.

Syntax

C#

```
public sealed class AudioBeamFrameReference
```

Members

AudioBeamFrameReference has the following members.

Properties

Name	Description
RelativeTime	Gets the relative time of this frame.

Methods

Name	Description
AcquireBeamFrames	Container for one frame's worth of audio beam image data. Can return null if the data is not available. Upon success, returns the AudioBeamFrame collection corresponding to this event, which must be Disposed.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

AudioBeamSubFrame Class

Represents an audio beam sub frame.

Syntax

C#

```
public sealed class AudioBeamSubFrame : IDisposable
```

Members

AudioBeamSubFrame has the following members.

Properties

Name	Description
AudioBeamMode	Gets the audio beam mode.
AudioBodyCorrelations	Acquires the list of the AudioBodyCorrelation objects available in this subframe.
BeamAngle	Gets the angle (in radians) of the audio beam, which is the direction that the sensor is actively listening.

BeamAngleConfidence	Gets the confidence in the beam angle; the range is [0.0, 1.0], where 1 is the highest possible confidence.
Duration	Gets the duration of the audio beam sub frame.
FrameLengthInBytes	Gets the length of a frame in bytes.
RelativeTime	Gets the relative time of this sub frame.

Methods

Name	Description
Close	Releases system resources associated with the audio beam sub frame.
CopyFrameDataToArray	Copy the audio buffer (32-bit float, mono, 16khz sample rate) into the array provided.
CopyFrameDataToBuffer	Copies the frame data into the array provided.
LockAudioBuffer	Locks the audio buffer in preparation for reading the data.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

AudioBodyCorrelation Class

Represents a correlation between an audio frame and a unique body tracking id.

Syntax

C#

```
public sealed class AudioBodyCorrelation
```

Members

AudioBodyCorrelation has the following members.

Properties

Name	Description
BodyTrackingId	Gets the unique body tracking id associated with this subframe.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

AudioSource Class

Represents an audio frame source.

Syntax

C#

```
public sealed class AudioSource : INotifyPropertyChanged
```

Members

AudioSource has the following members.

Properties

Name	Description
AudioBeams	Gets the audio beams.
AudioCalibrationState	Gets a value that indicates whether or not the Kinect Sensor is properly calibrated to listen for audio. This API is not implemented in the Kinect for Windows v2 SDK and will always return Calibrated. It is included to support cross-compilation with the Xbox SDK.
IsActive	Gets the current activity status of this source.
KinectSensor	Gets the parent sensor.
MaxSubFrameCount	Gets the maximum number of sub frames.
SubFrameDuration	Gets the sub frame duration.
SubFrameLengthInBytes	Gets the sub frame length (in bytes).

Methods

Name	Description
OpenReader	Opens a new stream reader. This reader must be disposed.

Events

Name	Description
FrameCaptured	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the AudioSource class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

Body Class

Represents a body.

Syntax

C#

```
public sealed class Body : IDisposable
```

Members

Body has the following members.

Properties

Name	Description
Activities	[Deprecated] Gets the status of the body's possible activities. This API is not implemented in the Kinect for Windows v2 SDK and will always return null. It is included to support cross-compilation with the Xbox SDK.
Appearance	[Deprecated] Gets the status of the body's possible appearance characteristics. This API is not implemented in the Kinect for Windows v2 SDK and will always return null. It is included to support cross-compilation with the Xbox SDK.
ClippedEdges	Gets the edges of the field of view that clip the body.
Engaged	[Deprecated] Gets the status of the body's engagement. This API is not implemented in the Kinect for Windows v2 SDK. It is included to support cross-compilation with the Xbox SDK.
Expressions	Gets the status of the body's possible expressions. This API is not implemented in the Kinect for Windows v2 SDK and will always return null. It is included to support cross-compilation with the Xbox SDK.
HandLeftConfidence	Gets the confidence of the body's left hand state.
HandLeftState	Gets the status of the body's left hand state.
HandRightConfidence	Gets the confidence of the body's right hand state.
HandRightState	Gets the status of the body's right hand state.
IsRestricted	Gets whether or not the body is restricted.
IsTracked	Gets whether or not the body is tracked.
JointCount	Gets the number of joints in a body.
JointOrientations	Gets the joint orientations of the body.
Joints	Gets the joint positions of the body.
Lean	Gets the lean vector of the body.
LeanTrackingState	Gets the tracking state for the body lean.

TrackingId	Gets the tracking ID for the body.
----------------------------	------------------------------------

Methods

Name	Description
Close	Releases system resources associated with the body.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyFrame Class

Represents a frame that contains all the computed real-time tracking information about people that are in view of the sensor.

Syntax

C#

```
public sealed class BodyFrame : IDisposable
```

Members

BodyFrame has the following members.

Properties

Name	Description
BodyCount	Gets the body count, which is the number of bodies the system can track and thus the size of the collection that must be used to store these bodies.
BodyFrameSource	Gets the source of the body frame.
FloorClipPlane	Gets the floor clip plane of the body frame in hessian normal form. The (x,y,z) components are a unit vector indicating the normal of the plane, and w is the distance from the plane to the origin in meters.
RelativeTime	Gets the timestamp of the body frame.

Methods

Name	Description
Close	Releases system resources associated with the body frame.
GetAndRefreshBodyData	Gets refreshed body data.

Remarks

The computed data provided by this frame type includes skeletal joints and orientations, hand states, and more for up to 6 people at a time. These tracking features provide a great baseline for getting started with human interaction in your app.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyFrameArrivedEventArgs Class

Represents the arguments for a body frame reader's FrameArrived event.

Syntax

C#

```
public sealed class BodyFrameArrivedEventArgs
```

Members

BodyFrameArrivedEventArgs has the following members.

Properties

Name	Description
FrameReference	Gets the reference to the body frame for the FrameArrived event.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyFrameReader Class

Represents a reader for body frames.

Syntax

C#

```
public sealed class BodyFrameReader : IDisposable,
    INotifyPropertyChanged
```

Members

BodyFrameReader has the following members.

Properties

Name	Description
BodyFrameSource	Gets the source of the body frames.
IsPaused	Gets or sets whether the body frame reader is paused.

Methods

Name	Description
AcquireLatestFrame	Gets the most recent body frame.
Close	Closes and releases system resources associated with the body frame reader.

Events

Name	Description
FrameArrived	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the BodyFrameReader class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyFrameReference Class

Represents a reference to an actual body frame.

Syntax

C#

```
public sealed class BodyFrameReference
```

Members

BodyFrameReference has the following members.

Properties

Name	Description
RelativeTime	Gets the timestamp of the referenced body frame.

Methods

Name	Description
AcquireFrame	Gets the actual body frame from the reference.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyFrameSource Class

Represents a source of body frames from a KinectSensor.

Syntax

C#

```
public sealed class BodyFrameSource : INotifyPropertyChanged
```

Members

BodyFrameSource has the following members.

Properties

Name	Description
BodyCount	Gets the number of bodies.
IsActive	Gets whether the body frame source is active.
KinectSensor	Gets the KinectSensor with which the body frame source is associated.

Methods

Name	Description
OpenReader	Creates a frame reader for the body frame source.
OverrideHandTracking	Overloaded. Overloaded methods for OverrideHandTracking.

Events

Name	Description
FrameCaptured	Event that is raised when the next body frame is ready to be delivered to subscribed readers.
PropertyChanged	Occurs when a property of the BodyFrameSource class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyIndexFrame Class

Represents a frame that indicates which depth or infrared pixels belong to tracked people and which do not.

Syntax

C#

```
public sealed class BodyIndexFrame : IDisposable
```

Members

BodyIndexFrame has the following members.

Properties

Name	Description
BodyIndexFrameSource	Gets the source of the body index frame.
FrameDescription	Gets the description of the body index frame.
RelativeTime	Gets the timestamp of the body index frame.

Methods

Name	Description

Close	Releases system resources associated with the body index frame.
CopyFrameDataToArray	Copies the body index frame data into the array provided.
CopyFrameDataToBuffer	Copies the body index frame data into the memory location provided.
LockImageBuffer	Gives an app access to the underlying buffer used by the system to store this frame's data.

Remarks

The pixel values in this frame are 8-bit unsigned integers, where 0-5 map directly to the BodyData index in the [BodyFrame](#). Values greater than the value obtained from [BodyCount](#) indicate the pixel is part of the background, not associated with a tracked body. This frame is useful for green screening applications, or any scenario where you want to display the silhouette of the user. It also provides a good starting bounds for custom depth algorithms.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyIndexFrameArrivedEventArgs Class

Represents the arguments for a body index frame reader's FrameArrived event.

Syntax

C#

```
public sealed class BodyIndexFrameArrivedEventArgs
```

Members

BodyIndexFrameArrivedEventArgs has the following members.

Properties

Name	Description
FrameReference	Gets the reference to the body index frame for the FrameArrived event.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyIndexFrameReader Class

Represents a reader for body index frames.

Syntax

C#

```
public sealed class BodyIndexFrameReader : IDisposable,  
INotifyPropertyChanged
```

Members

BodyIndexFrameReader has the following members.

Properties

Name	Description
BodyIndexFrameSource	Gets the source of the body index frames.
IsPaused	Gets or sets whether the body index frame reader is paused.

Methods

Name	Description
AcquireLatestFrame	Gets the most recent body index frame.
Close	Closes and releases system resources associated with the body index frame reader.

Events

Name	Description
FrameArrived	Event that fires when a new frame is ready.
PropertyChanged	Occurs when a property of the BodyIndexFrameReader class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyIndexFrameReference Class

Represents a reference to an actual body index frame.

Syntax

C#

```
public sealed class BodyIndexFrameReference
```

Members

BodyIndexFrameReference has the following members.

Properties

Name	Description
RelativeTime	Gets the unique relative time at which this frame was produced.

Methods

Name	Description
AcquireFrame	Gets the actual body index frame from the reference.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

BodyIndexFrameSource Class

Represents a source of body index frames from a KinectSensor.

Syntax

C#

```
public sealed class BodyIndexFrameSource : INotifyPropertyChanged
```

Members

BodyIndexFrameSource has the following members.

Properties

Name	Description
FrameDescription	Gets the description of the body index frames.

IsActive	Gets whether the body index frame source is active.
KinectSensor	Gets the Kinect sensor of the body index frame source.

Methods

Name	Description
OpenReader	Creates a frame reader for the body index frame source.

Events

Name	Description
FrameCaptured	Event that is raised when the next body index frame is ready to be delivered to subscribed readers.
PropertyChanged	Occurs when a property of the BodyIndexFrameSource class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

ColorCameraSettings Class

Represents the settings of the color camera.

Syntax

C#

```
public sealed class ColorCameraSettings
```

Members

ColorCameraSettings has the following members.

Properties

Name	Description
ExposureTime	Gets the exposure time.
FrameInterval	Gets the interval between the beginning of one exposure and the next.
Gain	Gets the gain.
Gamma	Gets the gamma exponent.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

ColorFrame Class

Represents a color frame from the ColorFrameSource of a KinectSensor.

Syntax

C#

```
public sealed class ColorFrame : IDisposable
```

Members

ColorFrame has the following members.

Properties

Name	Description
ColorCameraSettings	Gets the color camera settings of the color frame.
ColorFrameSource	Gets the source of the color frame.
FrameDescription	Gets the description of the color frame.
RawColorImageFormat	Gets the format of the color frame data.
RelativeTime	Gets the timestamp of the color frame.

Methods

Name	Description
Close	Releases system resources associated with the color frame.
CopyConvertedFrameDataToArray	Converts the raw format into the requested format and copies the data into the array provided.
CopyConvertedFrameDataToBuffer	

	Converts the raw format into the requested format and copies the data into the memory location provided.
CopyRawFrameDataToArray	Copies the raw frame data into the array provided.
CopyRawFrameDataToBuffer	Copies raw frame data into the memory location provided.
CreateFrameDescription	Creates a FrameDescription object for the ColorFrame of the requested format.
LockRawImageBuffer	Gives an app access to the underlying buffer used by the system to store this frame's data.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

ColorFrameArrivedEventArgs Class

Represents the arguments for a color frame reader's FrameArrived event.

Syntax

C#

```
public sealed class ColorFrameArrivedEventArgs
```

Members

ColorFrameArrivedEventArgs has the following members.

Properties

Name	Description
FrameReference	Gets the reference to the color frame for the FrameArrived event.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

ColorFrameReader Class

Represents a reader for color frames.

Syntax

C#

```
public sealed class ColorFrameReader : IDisposable,  
    INotifyPropertyChanged
```

Members

ColorFrameReader has the following members.

Properties

Name	Description
ColorFrameSource	Represents a source of color frames from a KinectSensor.
IsPaused	Gets or sets whether the color frame reader is paused.

Methods

Name	Description
AcquireLatestFrame	Gets the most recent color frame.
Close	Closes and releases system resources associated with the color frame reader.

Events

Name	Description
FrameArrived	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the ColorFrameReader class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

ColorFrameReference Class

Represents a reference to an actual color frame.

Syntax

C#

```
public sealed class ColorFrameReference
```

Members

ColorFrameReference has the following members.

Properties

Name	Description
RelativeTime	Gets the timestamp of the referenced color frame.

Methods

Name	Description
AcquireFrame	Gets the actual color frame from the reference.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

ColorFrameSource Class

Represents a source of color frames from a KinectSensor.

Syntax

C#

```
public sealed class ColorFrameSource : INotifyPropertyChanged
```

Members

ColorFrameSource has the following members.

Properties

Name	Description
FrameDescription	Gets the description of the color frames.
IsActive	Gets whether the color frame source is active.
KinectSensor	Gets the Kinect sensor of the color frame source.

Methods

Name	Description
CreateFrameDescription	Creates a FrameDescription object for the ColorFrame of the requested format.
OpenReader	Creates a frame reader for the color frame source.

Events

Name	Description
FrameCaptured	Event that is raised when the next color frame is ready to be delivered to subscribed readers.
PropertyChanged	Occurs when a property of the ColorFrameSource class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

CoordinateMapper Class

Represents the mapper that provides translation services from one type of point to another.

Syntax

C#

```
public sealed class CoordinateMapper
```

Members

CoordinateMapper has the following members.

Methods

Name	Description
GetDepthCameraIntrinsics	Returns the calibration data for the depth camera.
GetDepthFrameToCameraSpaceTable	Gets the depth frame to camera space look-up table.
MapCameraPointsToColorSpace	Produces an array of color space points from an array of camera points.
MapCameraPointsToDepthSpace	Maps points at a specified memory location from camera space to depth space.
MapCameraPointToColorSpace	Maps a point from camera space to color space.
MapCameraPointToDepthSpace	Maps a point from camera space to depth space.
MapColorFrameToCameraSpace	Maps a frame from color space to camera space.
MapColorFrameToCameraSpaceUsingIBuffer	Maps a frame from color space to camera space.
MapColorFrameToDepthSpace	Maps a frame from color space to depth space.
MapColorFrameToDepthSpaceUsingIBuffer	Maps a frame from color space to depth space.
MapDepthFrameToCameraSpace	

	Maps a frame from depth space to camera space.
MapDepthFrameToCameraSpaceUsingIBuffer	Maps a frame from depth space to camera space.
MapDepthFrameToColorSpace	Maps a frame from depth space to color space.
MapDepthFrameToColorSpaceUsingIBuffer	Maps a frame from depth space to color space.
MapDepthPointsToCameraSpace	Produces an array of camera space points from an array of depth points.
MapDepthPointsToColorSpace	Produces an array of color space points from an array of depth points.
MapDepthPointToCameraSpace	Maps a point/depth from depth space to camera space.
MapDepthPointToColorSpace	Maps a point/depth from depth space to color space.

Events

Name	Description
CoordinateMappingChanged	Event that is raised when any of the mappings between camera, color, and depth space change.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

CoordinateMappingChangedEventArgs Class

Represents the arguments for a coordinate mapping's `CoordinateMappingChanged` event.

Syntax

C#

```
public sealed class CoordinateMappingChangedEventArgs
```

Members

CoordinateMappingChangedEventArgs has the following members.

Remarks

Requirements

Namespace: `WindowsPreview.Kinect`

Metadata: `windowspreview.kinect.winmd`

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

DepthFrame Class

Represents a frame where each pixel represents the distance (in millimeters) of the closest object seen by that pixel.

Syntax

C#

```
public sealed class DepthFrame : IDisposable
```

Members

DepthFrame has the following members.

Properties

Name	Description
DepthFrameSource	Gets the source of the depth frame.
DepthMaxReliableDistance	Gets the maximum reliable depth of the depth frame, in millimeters.
DepthMinReliableDistance	Gets the minimum reliable depth of the depth frame, in millimeters.
FrameDescription	Gets the description of the depth frame.
RelativeTime	Gets the timestamp of the depth frame.

Methods

Name	Description
Close	Releases system resources associated with the depth frame.
CopyFrameDataToArray	Copies the depth frame data into the array provided.

CopyFrameDataToBuffer	Copies the depth frame data into the memory location provided.
LockImageBuffer	Gives an app access to the underlying buffer used by the system to store this frame's data.

Remarks

The data for this frame is stored as 16-bit unsigned integers, where each value represents the distance in millimeters. The maximum depth distance is 8 meters, although reliability starts to degrade at around 4.5 meters. Developers can use the depth frame to build custom tracking algorithms in cases where the [BodyFrame](#) isn't enough.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

DepthFrameArrivedEventArgs Class

Represents the arguments for a depth frame reader's FrameArrived event.

Syntax

C#

```
public sealed class DepthFrameArrivedEventArgs
```

Members

DepthFrameArrivedEventArgs has the following members.

Properties

Name	Description
FrameReference	Gets the reference to the depth frame for the FrameArrived event.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

DepthFrameReader Class

Represents a reader for depth frames.

Syntax

C#

```
public sealed class DepthFrameReader : IDisposable,  
INotifyPropertyChanged
```

Members

DepthFrameReader has the following members.

Properties

Name	Description
DepthFrameSource	Gets the source of the depth frames.
IsPaused	Gets or sets whether the depth frame reader is paused.

Methods

Name	Description
AcquireLatestFrame	Gets the most recent depth frame.
Close	Closes and releases system resources associated with the depth frame reader.

Events

Name	Description
FrameArrived	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the DepthFrameReader class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

DepthFrameReference Class

Represents a reference to an actual depth frame.

Syntax

C#

```
public sealed class DepthFrameReference
```

Members

DepthFrameReference has the following members.

Properties

Name	Description
RelativeTime	Gets the timestamp of the referenced depth frame.

Methods

Name	Description
AcquireFrame	Gets the actual depth frame from the reference.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

DepthFrameSource Class

Represents a source of depth frames from a KinectSensor.

Syntax

C#

```
public sealed class DepthFrameSource : INotifyPropertyChanged
```

Members

DepthFrameSource has the following members.

Properties

Name	Description
DepthMaxReliableDistance	Gets the maximum reliable depth of the depth frames, in millimeters.
DepthMinReliableDistance	Gets the minimum reliable depth of the depth frames, in millimeters.
FrameDescription	Gets the frame description for the format.
IsActive	Gets whether the depth frame source is active.

KinectSensor	Gets the KinectSensor of the depth frame source.
------------------------------	--

Methods

Name	Description
OpenReader	Creates a frame reader for the depth frame source.

Events

Name	Description
FrameCaptured	Event that is raised when the next depth frame is ready to be delivered to subscribed readers.
PropertyChanged	Occurs when a property of the DepthFrameSource class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

FrameCapturedEventArgs Class

Represents the arguments for a frame source's FrameCaptured event.

Syntax

C#

```
public sealed class FrameCapturedEventArgs
```

Members

FrameCapturedEventArgs has the following members.

Properties

Name	Description
FrameStatus	Gets the status of the captured frame.
FrameType	Gets the type of the captured frame.
RelativeTime	Gets the unique relative time at which the frame was captured.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

FrameDescription Class

Represents the properties of an image frame from the KinectSensor.

Syntax

C#

```
public sealed class FrameDescription
```

Members

FrameDescription has the following members.

Properties

Name	Description
BytesPerPixel	Gets the bytes per pixel of the data for an image frame.
DiagonalFieldOfView	Gets the diagonal field of view for an image frame, in degrees.
Height	Gets the height of an image frame, in pixels.
HorizontalFieldOfView	Gets the horizontal field of view for an image frame, in degrees.
LengthInPixels	Gets the length in pixels of the data for an image frame.
VerticalFieldOfView	Gets the vertical field of view for an image frame, in degrees.
Width	Gets the width of an image frame, in pixels.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

InfraredFrame Class

Represents a frame that provides a view of the scene that looks just like a black and white photograph, but is actively lit, so brightness is consistent regardless of location and room brightness.

Syntax

C#

```
public sealed class InfraredFrame : IDisposable
```

Members

InfraredFrame has the following members.

Properties

Name	Description
FrameDescription	Gets the description of the infrared frame.
InfraredFrameSource	Gets the source of the infrared frame.
RelativeTime	Gets the timestamp of the infrared frame.

Methods

Name	Description
Close	Releases system resources associated with the infrared frame.

CopyFrameDataToArray	Copies the infrared frame data into the array provided.
CopyFrameDataToBuffer	Copies the infrared frame data into the memory location provided.
LockImageBuffer	Gives an app access to the underlying buffer used by the system to store this frame's data.

Remarks

The infrared frame is great for computer vision algorithms where texture is important, such as facial recognition. Data is stored as 16-bit unsigned integers. The infrared frame is also great for green screening, tracking reflective markers, and filtering out low-return (and therefore jittery) depth pixels. Note that the infrared frame is derived from the same sensor as depth, so the images are perfectly aligned. For example, the infrared pixel at row 5 col 9 goes with the depth pixel at row 5 col 9.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

InfraredFrameArrivedEventArgs Class

Represents the arguments for an infrared frame reader's FrameArrived event.

Syntax

C#

```
public sealed class InfraredFrameArrivedEventArgs
```

Members

InfraredFrameArrivedEventArgs has the following members.

Properties

Name	Description
FrameReference	Gets the reference to the infrared frame for the FrameArrived event.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

InfraredFrameReader Class

Represents a reader for infrared frames.

Syntax

C#

```
public sealed class InfraredFrameReader : IDisposable,
    INotifyPropertyChanged
```

Members

InfraredFrameReader has the following members.

Properties

Name	Description
InfraredFrameSource	Gets the source of the infrared frames.
IsPaused	Gets or sets whether the infrared frame reader is paused.

Methods

Name	Description
AcquireLatestFrame	Gets the most recent infrared frame.
Close	Closes and releases system resources associated with the infrared frame reader.

Events

Name	Description
FrameArrived	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the InfraredFrameReader class changes.

Requirements

Namespace: WindowsPreview.Kinect
Metadata: windowspreview.kinect.winmd

See also

Reference
[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

InfraredFrameReference Class

Represents a reference to an actual infrared frame.

Syntax

C#

```
public sealed class InfraredFrameReference
```

Members

InfraredFrameReference has the following members.

Properties

Name	Description
RelativeTime	Gets the timestamp of the referenced infrared frame.

Methods

Name	Description

AcquireFrame	Gets the actual infrared frame from the reference.
------------------------------	--

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

InfraredFrameSource Class

Represents a source of infrared frames from a KinectSensor.

Syntax

C#

```
public sealed class InfraredFrameSource : INotifyPropertyChanged
```

Members

InfraredFrameSource has the following members.

Properties

Name	Description
FrameDescription	Gets the frame description for the format.
IsActive	Gets whether the infrared frame source is active.

KinectSensor	Gets the KinectSensor of the infrared frame source.
------------------------------	---

Methods

Name	Description
OpenReader	Creates a frame reader for the infrared frame source.

Events

Name	Description
FrameCaptured	Event that is raised when the next infrared frame is ready to be delivered to subscribed readers.
PropertyChanged	Occurs when a property of the InfraredFrameSource class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

IsAvailableChangedEventArgs Class

Represents the arguments for a KinectSensor's IsAvailableChanged event.

Syntax

C#

```
public sealed class IsAvailableChangedEventArgs
```

Members

IsAvailableChangedEventArgs has the following members.

Properties

Name	Description
IsAvailable	Gets whether or not the KinectSensor is available.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

KinectSensor Class

Represents a KinectSensor device.

Syntax

C#

```
public sealed class KinectSensor : INotifyPropertyChanged
```

Members

KinectSensor has the following members.

Properties

Name	Description
AudioSource	Gets the source for audio frames.
BodyFrameSource	Gets the source for body frames.
BodyIndexFrameSource	Gets the source for body index frames.
ColorFrameSource	Gets the source for color frames.
CoordinateMapper	Gets the coordinate mapper.
DepthFrameSource	Gets the source for depth frames.
InfraredFrameSource	Gets the source for infrared frames.
IsAvailable	Gets whether the Kinect sensor is available and able to retrieve frames.
IsOpen	Gets whether or not the KinectSensor is open.
KinectCapabilities	Gets the capabilities of the KinectSensor.
LongExposureInfraredFrameSource	Gets the source for long exposure infrared frames.
Sensors	Gets the list of available sensors.
UniqueKinectId	Gets the unique ID for the KinectSensor.

Methods

Name	Description
Close	Closes and releases system resources associated with the Kinect Sensor.
GetDefault	Gets the default sensor.
Open	Opens the KinectSensor for use.
OpenMultiSourceFrameReader	Creates a frame reader for the multiple frame sources.

Events

Name	Description
IsAvailableChanged	This event fires when the IsAvailable property changes.
PropertyChanged	Occurs when a property of the KinectSensor class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

LongExposureInfraredFrame Class

Represents a long exposure infrared frame.

Syntax

C#

```
public sealed class LongExposureInfraredFrame : IDisposable
```

Members

LongExposureInfraredFrame has the following members.

Properties

Name	Description
FrameDescription	Gets the description of the long exposure infrared frame.
LongExposureInfraredFrameSource	Gets the long exposure infrared frame source.
RelativeTime	Gets the timestamp of the long exposure infrared frame.

Methods

Name	Description
Close	Releases system resources associated with the long exposure infrared frame.
CopyFrameDataToArray	Copies the long exposure frame data into the array provided.
CopyFrameDataToBuffer	Copies the long exposure frame data into the buffer provided.
LockImageBuffer	Locks the buffer so the data can be read.

Remarks

This frame is similar to the [InfraredFrame](#), except it has been exposed over a longer period of time. The result is a higher quality image, with less noise, at the expense of some motion blur for objects that are moving.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

LongExposureInfraredFrameArrivedEventArgs Class

Represents the arguments for a long exposure infrared frame reader's FrameArrived event.

Syntax

C#

```
public sealed class LongExposureInfraredFrameArrivedEventArgs
```

Members

LongExposureInfraredFrameArrivedEventArgs has the following members.

Properties

Name	Description
------	-------------

FrameReference	Gets the reference to the long exposure infrared frame for the FrameArrived event.
--------------------------------	--

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

LongExposureInfraredFrameReader Class

Represents a reader for long exposure infrared frames.

Syntax

C#

```
public sealed class LongExposureInfraredFrameReader : IDisposable,
    INotifyPropertyChanged
```

Members

LongExposureInfraredFrameReader has the following members.

Properties

Name	Description
IsPaused	Gets or sets whether the long exposure infrared frame reader is paused.
LongExposureInfraredFrameSource	Gets the source of the long exposure infrared frames.

Methods

Name	Description
AcquireLatestFrame	Gets the most recent long exposure infrared frame.
Close	Closes and releases system resources associated with the long exposure infrared frame reader.

Events

Name	Description
FrameArrived	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the LongExposureInfraredFrameReader class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

LongExposureInfraredFrameReference Class

Represents a reference to an actual long exposure infrared frame.

Syntax

C#

```
public sealed class LongExposureInfraredFrameReference
```

Members

LongExposureInfraredFrameReference has the following members.

Properties

Name	Description
RelativeTime	Gets the timestamp of the referenced long exposure infrared frame.

Methods

Name	Description
AcquireFrame	Gets the actual long exposure infrared frame from the reference.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

LongExposureInfraredFrameSource Class

Represents a source of long exposure infrared frames from a Kinect sensor.

Syntax

C#

```
public sealed class LongExposureInfraredFrameSource :  
    INotifyPropertyChanged
```

Members

LongExposureInfraredFrameSource has the following members.

Properties

Name	Description
FrameDescription	Gets the description of the long exposure infrared frames.
IsActive	Gets whether the long exposure infrared frame source is active.
KinectSensor	Gets the sensor of the long exposure infrared frame source.

Methods

Name	Description
OpenReader	Creates a frame reader for the long exposure infrared frame source.

Events

Name	Description
FrameCaptured	Event that is raised whenever a frame is captured.
PropertyChanged	Occurs when a property of the LongExposureInfraredFrameSource class changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

MultiSourceFrame Class

Represents a multi source frame from the KinectSensor.

Syntax

C#

```
public sealed class MultiSourceFrame : IDisposable
```

Members

MultiSourceFrame has the following members.

Properties

Name	Description
BodyFrameReference	Gets the body frame reference of the multi source frame.
BodyIndexFrameReference	Gets the body index frame reference of the multi source frame.
ColorFrameReference	Gets the color frame reference of the multi source frame.
DepthFrameReference	Gets the depth frame reference of the multi source frame.
InfraredFrameReference	Gets the infrared frame reference of the multi source frame.
LongExposureInfraredFrameReference	Gets the long exposure infrared frame reference of the multi source frame.

Methods

Name	Description
Close	Releases system resources associated with the multi-source frame.

Requirements

Namespace: WindowsPreview.Kinect
Metadata: windowspreview.kinect.winmd

See also

Reference
[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

MultiSourceFrameArrivedEventArgs Class

Represents the arguments for a multi source frame reader's FrameArrived event.

Syntax

C#

```
public sealed class MultiSourceFrameArrivedEventArgs
```

Members

MultiSourceFrameArrivedEventArgs has the following members.

Properties

Name	Description
FrameReference	Gets the reference to the multi source frame for the FrameArrived event.

Remarks

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

MultiSourceFrameReader Class

Represents a reader for multi source frames.

Syntax

C#

```
public sealed class MultiSourceFrameReader : IDisposable,
    INotifyPropertyChanged
```

Members

MultiSourceFrameReader has the following members.

Properties

Name	Description
FrameSourceTypes	Gets the types of frames being read by the multi source frame reader.
IsPaused	Gets or sets whether the multi source frame reader is paused.
KinectSensor	Gets the Kinect sensor associated with the reader.

Methods

Name	Description
AcquireLatestFrame	Gets the most recent multi source frame.
Close	Closes and releases system resources associated with the multi-source frame reader.

Events

Name	Description
MultiSourceFrameArrived	Event that fires whenever a frame is captured.
PropertyChanged	Occurs when a property of the MultiSourceFrameReader changes.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

MultiSourceFrameReference Class

Represents a reference to an actual multi source frame.

Syntax

C#

```
public sealed class MultiSourceFrameReference
```

Members

MultiSourceFrameReference has the following members.

Methods

Name	Description
AcquireFrame	Gets the current frame held by this reference.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

CameraIntrinsics Structure

Represents the calibration data for the depth camera.

Syntax

C#

```
public struct CameraIntrinsics
```

Members

CameraIntrinsics has the following members.

Fields

Name	Description
FocalLengthX	The X focal length of the camera, in pixels.
FocalLengthY	The Y focal length of the camera, in pixels.
PrincipalPointX	The principal point of the camera in the X dimension, in pixels.
PrincipalPointY	The principal point of the camera in the Y dimension, in pixels.
RadialDistortionFourthOrder	The fourth order radial distortion parameter of the camera.
RadialDistortionSecondOrder	The second order radial distortion parameter of the camera.
RadialDistortionSixthOrder	The sixth order radial distortion parameter of the camera.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

CameraSpacePoint Structure

Represents a 3D point in camera space (in meters). The origin point (0,0,0), of the coordinate system is the camera position.

Syntax

C#

```
public struct CameraSpacePoint
```

Members

CameraSpacePoint has the following members.

Fields

Name	Description
X	The X coordinate of the point, in meters.
Y	The Y coordinate of the point, in meters.
Z	The Z coordinate of the point, in meters.

Remarks

Camera space refers to the 3D coordinate system used by Kinect. The coordinate system is defined as follows:

- The origin (x=0, y=0, z=0) is located at the center of the IR sensor on Kinect
- X grows to the sensor's left
- Y grows up (note that this direction is based on the sensor's tilt)
- Z grows out in the direction the sensor is facing
- 1 unit = 1 meter

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

[Body tracking](#)

© 2016 Microsoft

ColorSpacePoint Structure

Represents a 2D point in color space, expressed in pixels.

Syntax

C#

```
public struct ColorSpacePoint
```

Members

ColorSpacePoint has the following members.

Fields

Name	Description
X	The X coordinate of the point, in pixels.
Y	The Y coordinate of the point, in pixels.

Remarks

A color space point describes a 2D point on the color image. So a position in color space is a row/column location of a pixel on the image, where x=0, y=0 is the pixel at the top left of the color image, and x=1919, y=1079 (width-1, height-1) corresponds to the bottom right.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

DepthSpacePoint Structure

Represents pixel coordinates within a depth image.

Syntax

C#

```
public struct DepthSpacePoint
```

Members

DepthSpacePoint has the following members.

Fields

Name	Description
X	The X coordinate of the point, in pixels.

Y	The Y coordinate of the point, in pixels.
---	---

Remarks

Depth space is the term used to describe a 2D location on the depth image. Think of this as a row/column location of a pixel where x is the column and y is the row. So x=0, y=0 corresponds to the top left corner of the image and x=511, y=423 (width-1, height-1) is the bottom right corner of the image. In some cases, a z value is needed in order to map out of depth space. For these cases, simply sample the depth image at the row/column in question, and use that value (which is depth in millimeters) directly as z.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

Joint Structure

Represents the position of a joint of a body.

Syntax

C#

<pre>public struct Joint</pre>

Members

Joint has the following members.

Fields

Name	Description
JointType	The type of joint.
Position	The position of the joint in camera space.
TrackingState	The tracking state of the joint.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

[Body tracking](#)

© 2016 Microsoft

JointOrientation Structure

Represents the orientation of a joint of a body.

Syntax

C#

```
public struct JointOrientation
```

Members

JointOrientation has the following members.

Fields

Name	Description
JointType	The type of joint.
Orientation	The orientation of the joint.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

Vector4 Structure

Represents a 4D vector.

Syntax

C#

```
public struct Vector4
```

Members

Vector4 has the following members.

Fields

Name	Description
W	The W coordinate of the vector.
X	The X coordinate of the vector.
Y	The Y coordinate of the vector.
Z	The Z coordinate of the vector.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

Activity Enumeration

The activity in which a body may be engaged.

Syntax

C#

```
public enum Activity
```

Members

Member	Value	Description
EyeLeftClosed	0	The left eye is closed.
EyeRightClosed	1	The right eye is closed.
LookingAway	4	The person is looking away from the sensor.
MouthMoved	3	The mouth moved.
MouthOpen	2	The mouth is opened.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

Appearance Enumeration

Appearance characteristics a body may exhibit.

Syntax

C#

```
public enum Appearance
```

Members

Member	Value	Description

WearingGlasses	0	The user is wearing glasses.
-----------------------	---	------------------------------

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

AudioBeamMode Enumeration

Types of audio beam angle determination.

Syntax

C#

```
public enum AudioBeamMode
```

Members

Member	Value	Description
Automatic	0	The beam angle is automatically adjusted to point to the loudest sound source.
Manual	1	The beam angle is fixed and can be set by the application.

Requirements

Namespace: WindowsPreview.Kinect
Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

ColorImageFormat Enumeration

The available color image formats.

Syntax

C#

```
public enum ColorImageFormat
```

Members

Member	Value	Description
Bayer	4	Bayer format
Bgra	3	Bgra format
None	0	An unspecified format
Rgba	1	Rgba format
Yuv	2	Yuv format
Yuy2	5	Yuy2 format

Requirements

Namespace: WindowsPreview.Kinect
Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

DetectionResult Enumeration

Gesture detection result options.

Syntax

C#

```
public enum DetectionResult
```

Members

Member	Value	Description
Maybe	2	The appearance or activity might be a gesture.
No	1	The appearance or activity is not a gesture.
Unknown	0	It is unknown whether the appearance or activity is a gesture.
Yes	3	The appearance or activity is a gesture.

Remarks

This enumeration is used in a collection of properties such as [Activities](#) and [Appearance](#).

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

Expression Enumeration

User expressions. Expression functionality is not supported for Kinect for Windows apps. This enumeration is included to support cross-compilation with the Xbox SDK.

Syntax

C#

```
public enum Expression
```

Members

Member	Value	Description
Happy	1	Happy
Neutral	0	None or neutral

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

FrameCapturedStatus Enumeration

Captured frame status options.

Syntax

C#

```
public enum FrameCapturedStatus
```

Members

Member	Value	Description
Dropped	2	The frame was dropped.
Queued	1	The frame is queued for capture.
Unknown	0	The capture status is unknown.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

FrameEdges Enumeration

Identifies if the user's body is visible by indicating any portion of the user that is not in the camera's field of view.

Syntax

C#

```
[FlagsAttribute]  
public enum FrameEdges
```

Members

Member	Value	Description
Bottom	8	The user's body extends below the camera's field of view.
Left	2	The user's body extends to the left of the camera's field of view.
None	0	None of the user's body is out of the camera's field of view, the user is fully visible.
Right	1	The user's body extends to the right of the camera's field of view.
Top	4	The user's body extends above the camera's field of view.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

FrameSourceTypes Enumeration

The types frame sources for a MultiSourceReader.

Syntax

C#

```
[FlagsAttribute]  
public enum FrameSourceTypes
```

Members

Member	Value	Description
Audio	64	Audio stream source.
Body	32	Body stream source.
BodyIndex	16	Body index stream source.
Color	1	Color stream source.
Depth	8	Depth stream source.
Infrared	2	Infrared stream source.
LongExposureInfrared	4	Long exposure infrared stream source.
None	0	No source.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

HandState Enumeration

Possible hand states.

Syntax

C#

```
public enum HandState
```

Members

Member	Value	Description
Closed	3	The hand is closed.
Lasso	4	The hand is in the lasso state.
NotTracked	1	Hand state is not tracked.
Open	2	The hand is open.
Unknown	0	The state of the hand is unknown.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

JointType Enumeration

Joint types in a skeleton.

Syntax

C#

```
public enum JointType
```

Members


Member	Value	Description
AnkleLeft	14	Left ankle
AnkleRight	18	Right ankle
ElbowLeft	5	Left elbow
ElbowRight	9	Right elbow
FootLeft	15	Left foot
FootRight	19	Right foot
HandLeft	7	Left hand
HandRight	11	Right hand
HandTipLeft	21	Tip of the left hand
HandTipRight	23	Tip of the right hand
Head	3	Head

HipLeft	12	Left hip
HipRight	16	Right hip
KneeLeft	13	Left knee
KneeRight	17	Right knee
Neck	2	Neck
ShoulderLeft	4	Left shoulder
ShoulderRight	8	Right shoulder
SpineBase	0	Base of the spine
SpineMid	1	Middle of the spine
SpineShoulder	20	Spine
ThumbLeft	22	Left thumb
ThumbRight	24	Right thumb
WristLeft	6	Left wrist
WristRight	10	Right wrist

Remarks

This following figure shows the skeleton that is made up of each of these joint types.

Figure 1. Skeleton positions relative to the human body

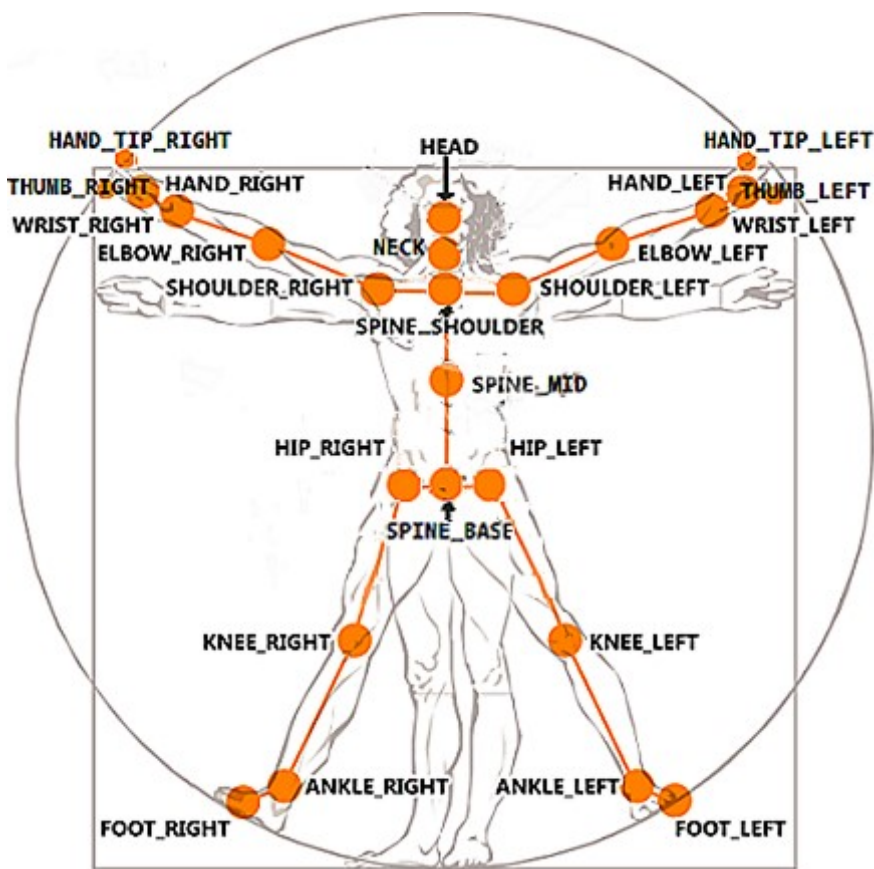

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

KinectAudioCalibrationState Enumeration

Specifies the Kinect for Windows sensor audio calibration states.

Syntax

C#

```
public enum KinectAudioCalibrationState
```

Members

Member	Value	Description
Calibrated	2	Sensor audio is calibrated.
CalibrationRequired	1	Sensor audio needs to be calibrated.
Unknown	0	Sensor audio calibration state is unknown.

Remarks

Note that the audio calibration state is always Calibrated for Kinect for Windows apps. This enumeration is included to support cross-compilation with the Xbox SDK.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

© 2016 Microsoft

KinectCapabilities Enumeration

Capabilities of the Kinect sensor.

Syntax

C#

```
[FlagsAttribute]  
public enum KinectCapabilities
```

Members

Member	Value	Description
Audio	2	Audio is supported.
Expressions	8	Expressions are supported.
Face	4	Facial recognition is supported.
Gamechat	16	Game chat is supported.
None	0	No capabilities are supported.
Vision	1	Vision is supported.

Remarks

A title declares these capabilities in the **mx:Capability** element in its application manifest file.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

TrackingConfidence Enumeration

Specifies the confidence level of a body's tracked attribute.

Syntax

C#

```
public enum TrackingConfidence
```

Members

Member	Value	Description
High	1	Fully tracked.
Low	0	Not tracked.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

TrackingState Enumeration

The state of tracking a body or body's attribute.

Syntax

C#

```
public enum TrackingState
```

Members

Member	Value	Description
Inferred	1	The joint data is inferred and confidence in the position data is lower than if it were Tracked.
NotTracked	0	The joint data is not tracked and no data is known about this joint.
Tracked	2	The joint data is being tracked and the data can be trusted.

Remarks

A tracked joint that cannot be seen by the camera is inferred. That is, the joint position is calculated from surrounding joint data rather than captured by the camera.

Requirements

Namespace: WindowsPreview.Kinect

Metadata: windowspreview.kinect.winmd

See also

Reference

[WindowsPreview.Kinect Namespace](#)

References

- [1] Intel Corporation. *Intel RealSense SDK 2016 R3 Documentation*. 2016. URL: https://software.intel.com/sites/landingpage/realSense/camera-sdk/v2016r3/documentation/html/index.html?doc_devguide_introduction.html.
- [2] HTC Corporation. *What are the minimum system requirements?* URL: https://www.vive.com/us/support//category_howto/839340.html.
- [3] Microsoft. *System Requirements*. URL: <https://msdn.microsoft.com/en-us/library/dn782036.aspx>.
- [4] Intel Corporation. *System Requirements for Intel® RealSense™ Camera F200*. URL: <http://www.intel.com/content/www/us/en/support/emerging-technologies/000006219.html>.
- [5] Ross Girshick Jitendra Malik Saurabh Gupta Pablo Arbelaez. “Aligning 3D Models to RGB-D Images of Cluttered Scenes”. In: *CVPR* (2015).
- [6] F. Michel S. Gumhold J. Shotton E. Brachmann A. Krull and C. Rother. “Learning 6d object pose estimation using 3d object coordinates”. In: *ECCV* (2014).
- [7] Frank Michel Michael Ying Yang Stefan Gumhold Carsten Rother Alexander Krull Eric Brachmann. *Learning Analysis-by-Synthesis for 6D Pose Estimation in RGB-D Images*. 2015. URL: <https://arxiv.org/pdf/1508.04546.pdf>.
- [8] Alexander Krull Michael Ying Yang Stefan Gumhold Carsten Rother Eric Brachmann* Frank Michel. *Uncertainty-Driven 6D Pose Estimation of Objects and Scenes from a Single RGB Image*. 2016. URL: <http://wwwpub.zih.tu-dresden.de/~cvweb/publications/papers/2016/rgbpose.pdf>.
- [9] Slobodan Ilic Stefan Holzer Gary Bradski Kurt Konolige Nassir Navab Stefan Hinterstoisser Vincent Lepetit. “Model Based Training, Detection and Pose Estimation of Texture-Less 3D Objects in Heavily Cluttered Scenes”. In: *ACCV* (2012).
- [10] Xiaofeng Ren Kevin Lai Liefeng Bo and Dieter Fox. “A Large-Scale Hierarchical Multi-View RGB-D Object Dataset”. In: *In IEEE International Conference on Robotics and Automation (ICRA)* (2011).
- [11] T. Prankl J. Zillich M. Richtsfeld A. Mörwald and M. Vincze. “Segmentation of Unknown Objects in Indoor Environments”. In: *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)* (2012).
- [12] Markus Vincze Aitor Aldoma Thomas Fäulhammer. “Automation of Ground-Truth Annotation for Multi-View RGB-D Object Instance Recognition Datasets”. In: *IEEE/RSJ Int. Conf. on Intelligent Robots and Systems (IROS)* (2014).
- [13] Karthik Narayan Tudor Achim Pieter Abbeel Arjun Singh James Sha. “BigBIRD: A Large-Scale 3D Database of Object Instances”. In: *ICRA* (2014).
- [14] Martin Reddy. *Object Files*. URL: <http://www.martinreddy.net/gfx/3d/OBJ.spec> (visited on 12/07/2016).

-
- [15] Epic Games. *Plugins*. 2016. URL: <https://docs.unrealengine.com/latest/INT/Programming/Plugins/> (visited on 12/07/2016).
- [16] Accord.NET. *Accord.NET Framework Documentation*. 2016. URL: http://accord-framework.net/docs/html/R_Project_Accord_NET.htm.