V2.3 CONTROLLED DRAFT — NOT FOR MANUFACTURE / BOM FREEZE

POWER: TPS2115A / reverse–PMOS / fuse paths: BLOCKED hot–state and source transients

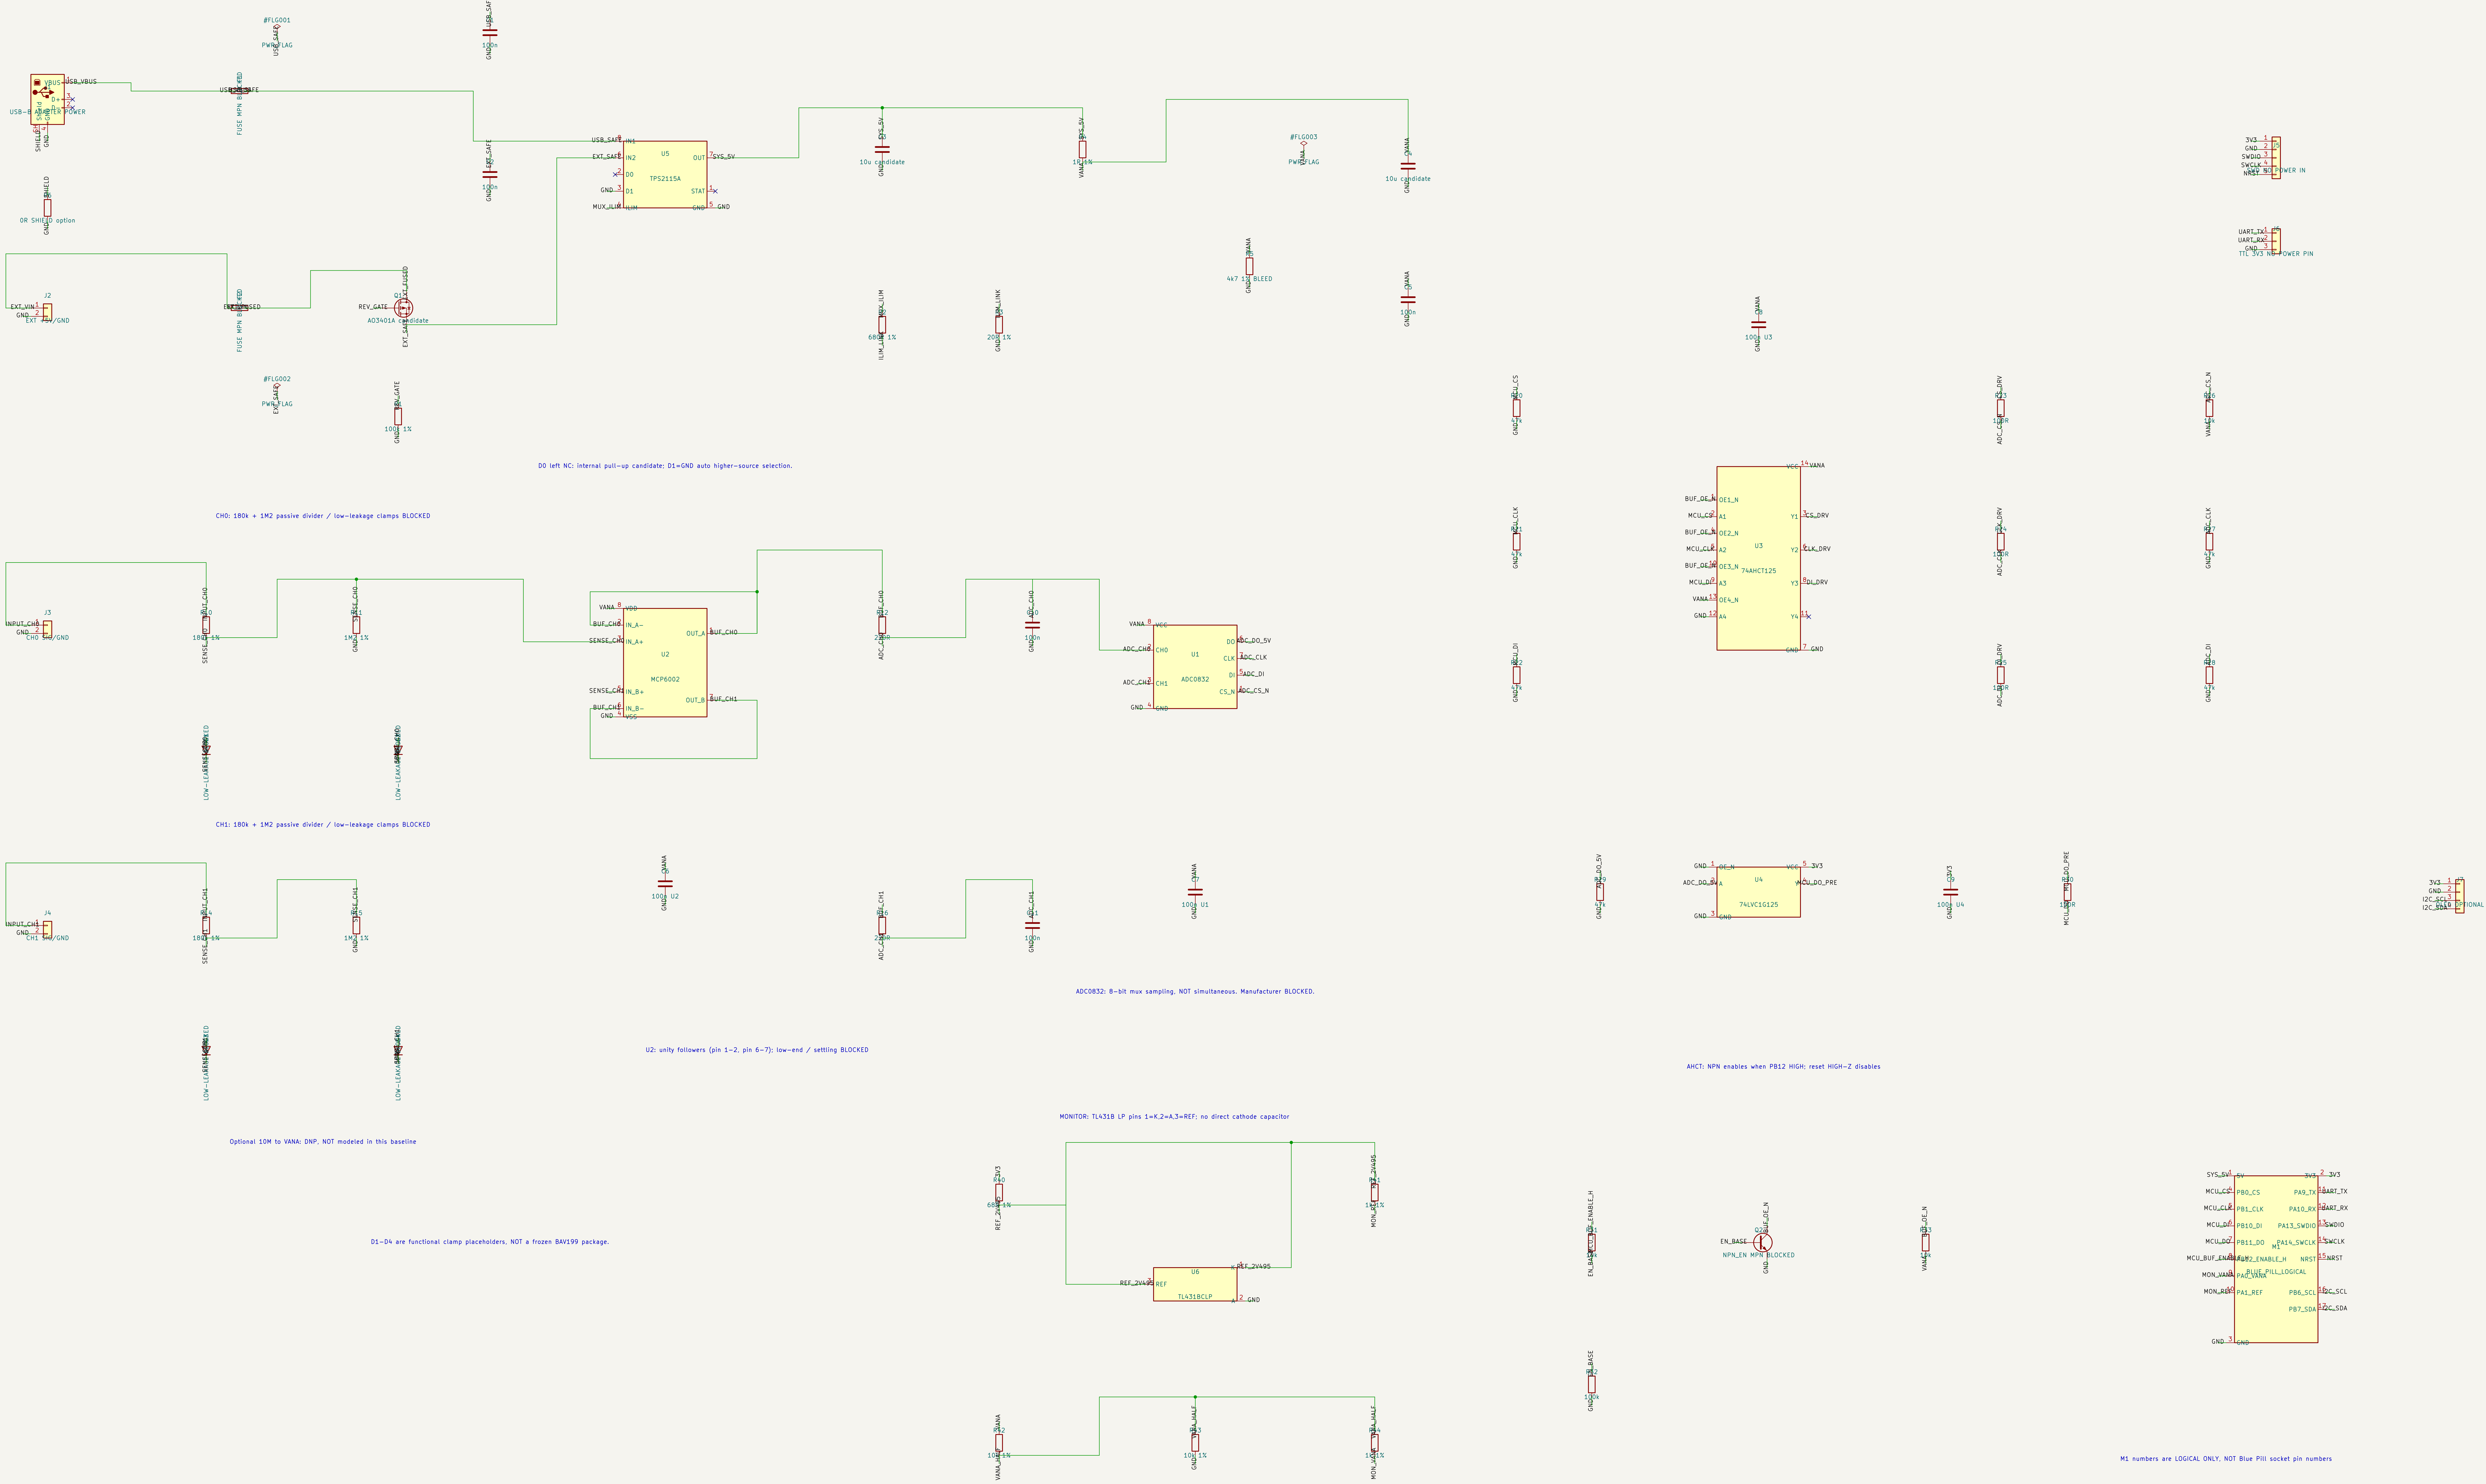

D0 left NC: internal pull–up candidate; D1=GND auto higher–source selection.

CH0: 180k + 1M2 passive divider / low–leakage clamps BLOCKED

CH1: 180k + 1M2 passive divider / low–leakage clamps BLOCKED

ADC0832: 8–bit mux sampling, NOT simultaneous. Manufacturer BLOCKED.

U2: unity followers (pin 1–2, pin 6–7); low–end / settling BLOCKED

AHCT: NPN enables when PB12 HIGH; reset HIGH–Z disables

MONITOR: TL431B LP pins 1=K,2=A,3=REF; no direct cathode capacitor

Optional 10M to VANA: DNP, NOT modeled in this baseline

D1–D4 are functional clamp placeholders, NOT a frozen BAV199 package.

M1 numbers are LOGICAL ONLY, NOT Blue Pill socket pin numbers

USB / SWD / TTL / PA0 bypass isolation: BLOCKED; no proof of safe hot–plug

PA0/PA1 power–off injection and ADC timing: BLOCKED

Same–name local labels connect on this page. NO automatic PWR_FLAG.

MANUAL SOURCE FLAGS: USB_SAFE / EXT_SAFE / VANA; P0 POWER–OFF SAFETY STILL BLOCKED.

Sheet: /
File: voltmeter–v2.3–draft.kicad_sch

Title:

Size: A1 | Date: | **Rev:**
KiCad E.D.A. 10.0.6 | Id: 1/1