

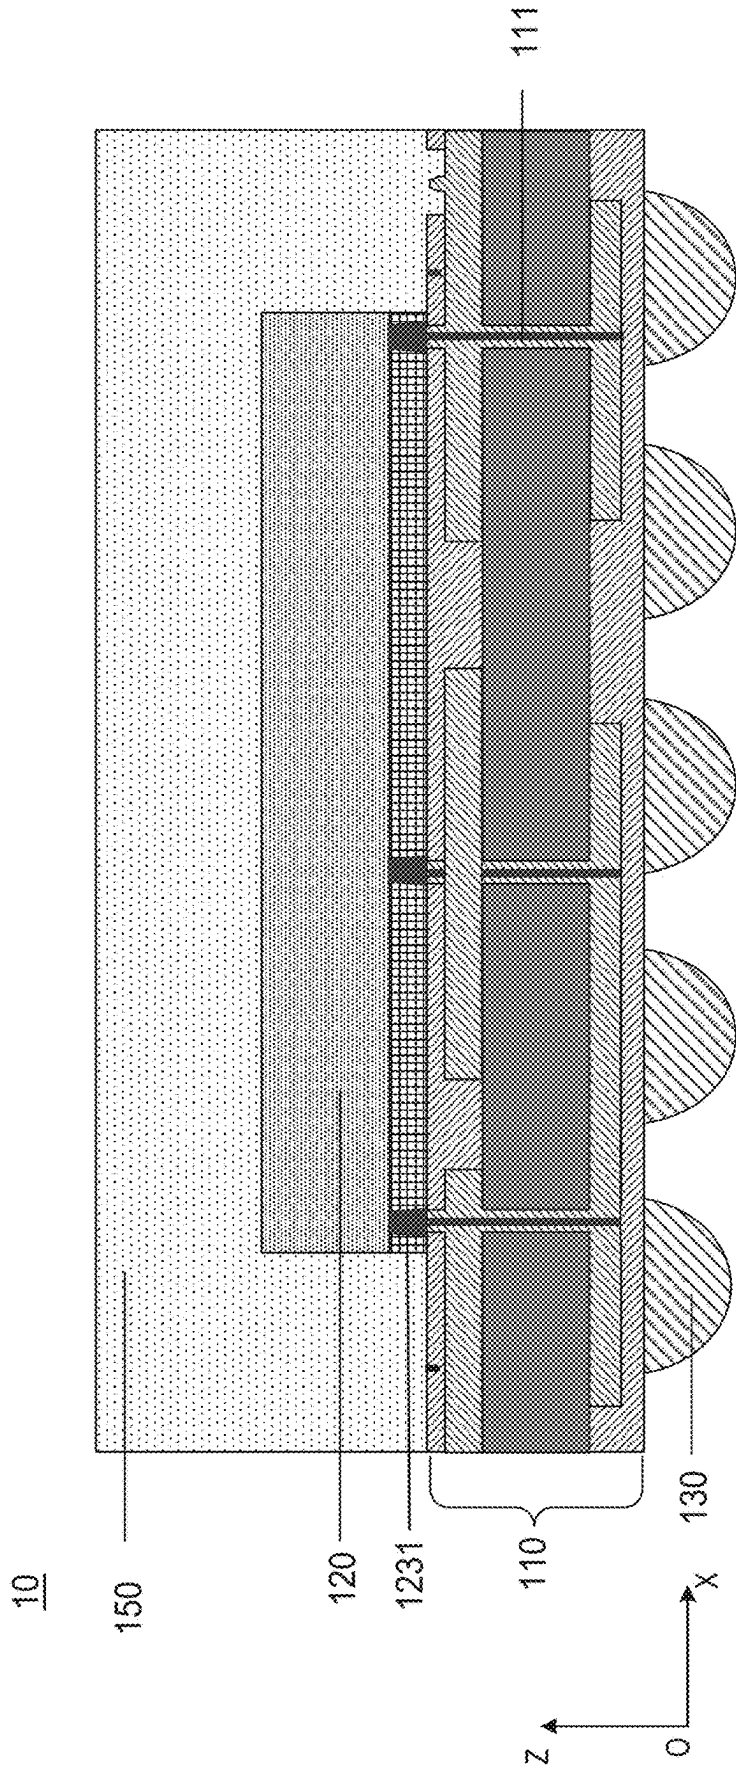


FIG. 1

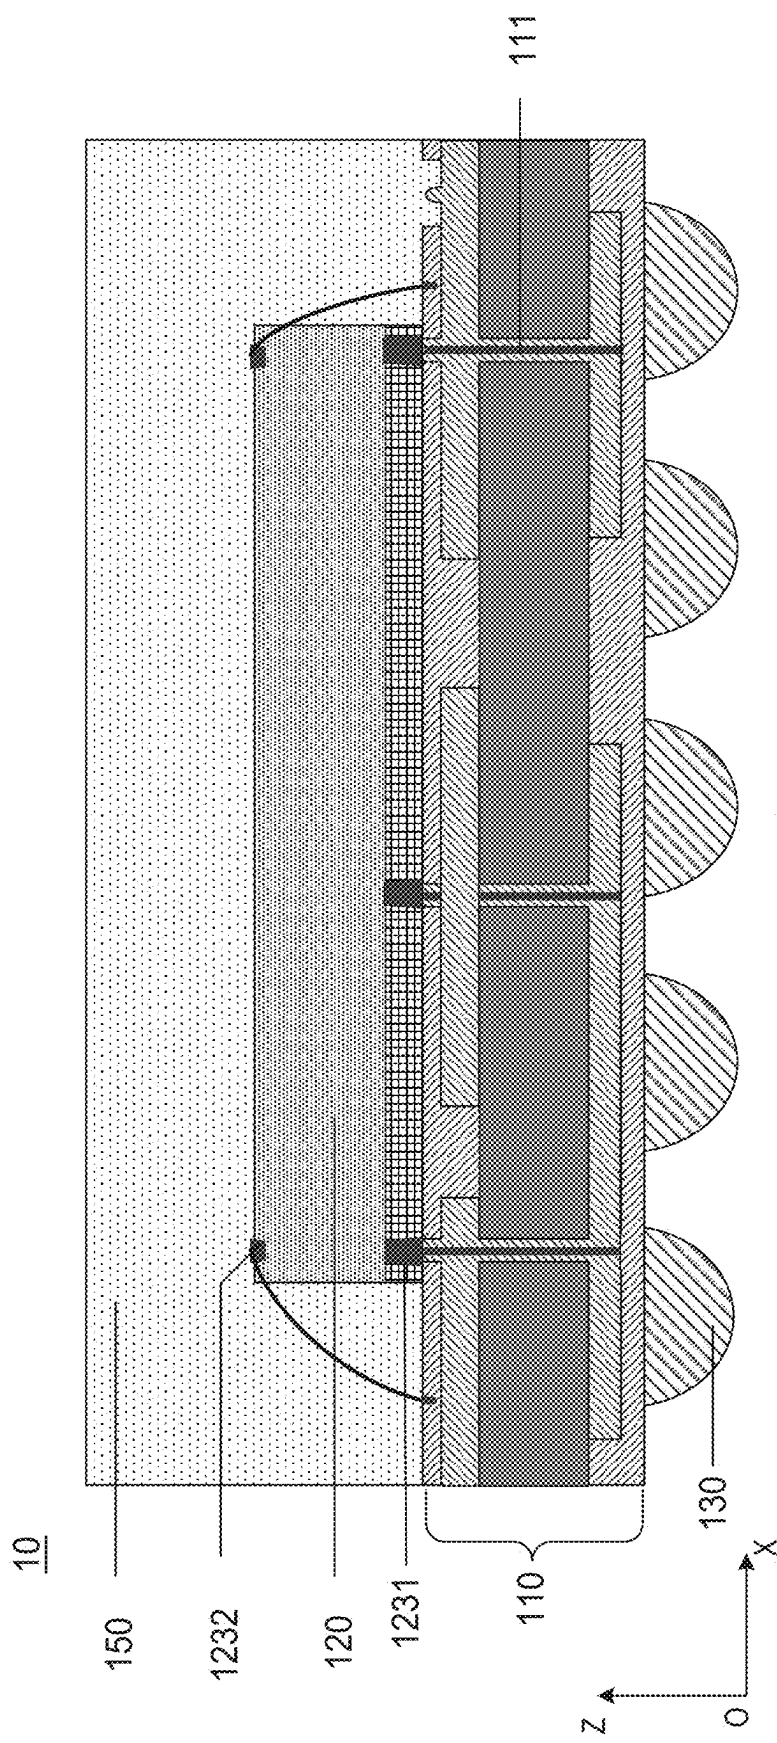


FIG. 2

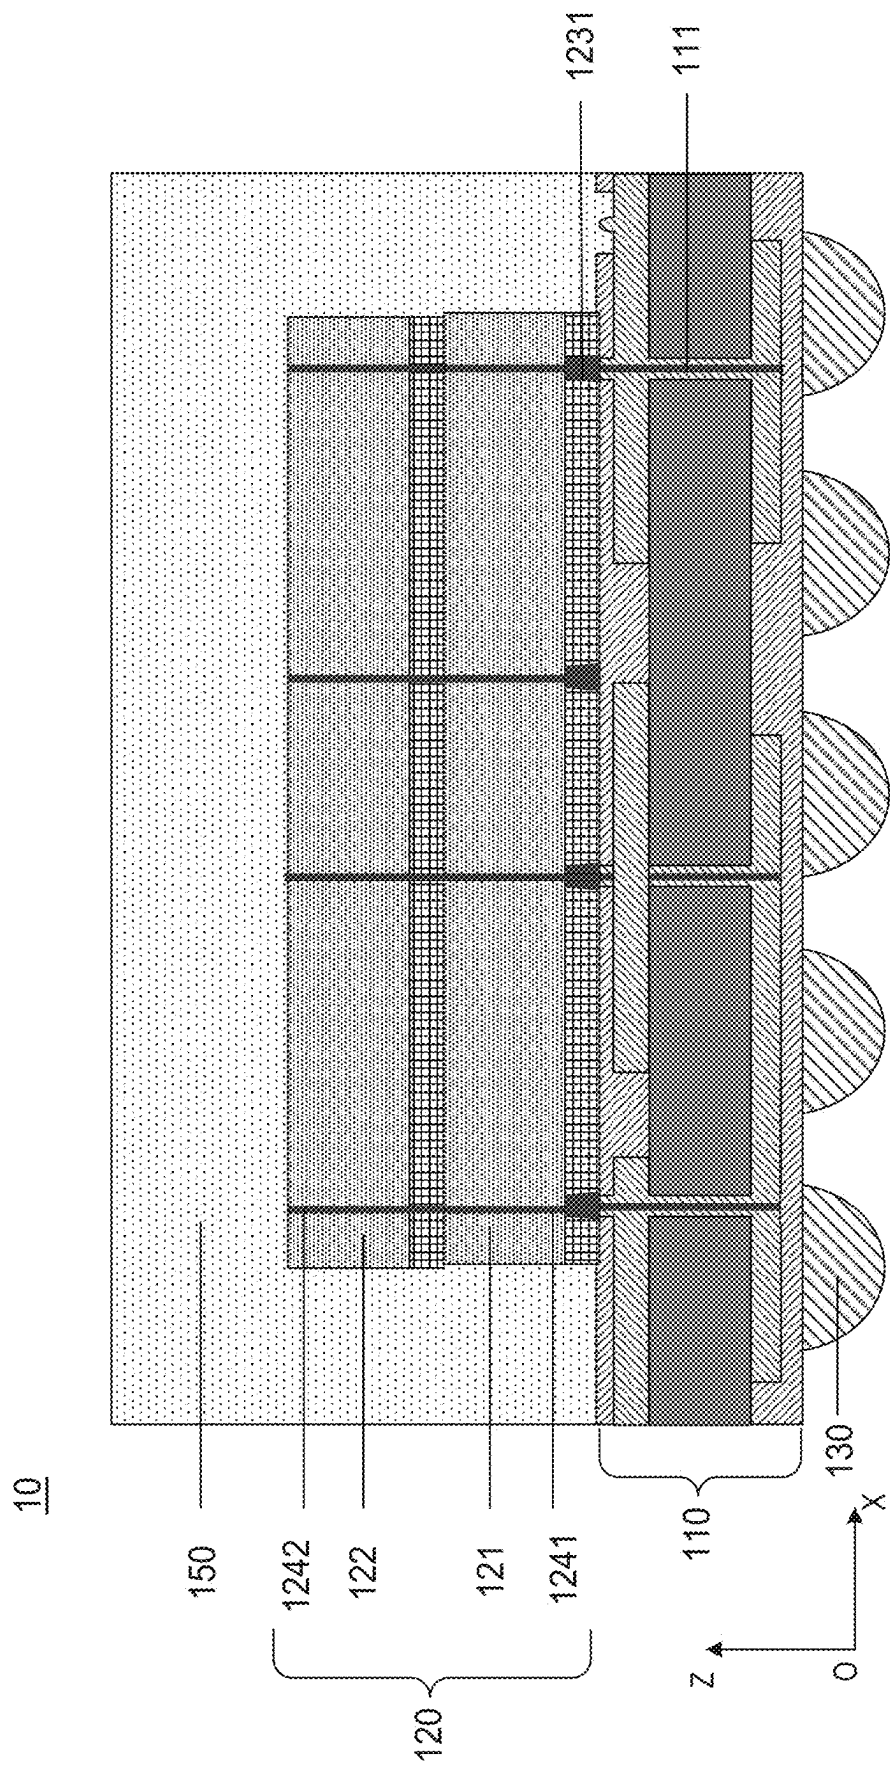


FIG. 3

11

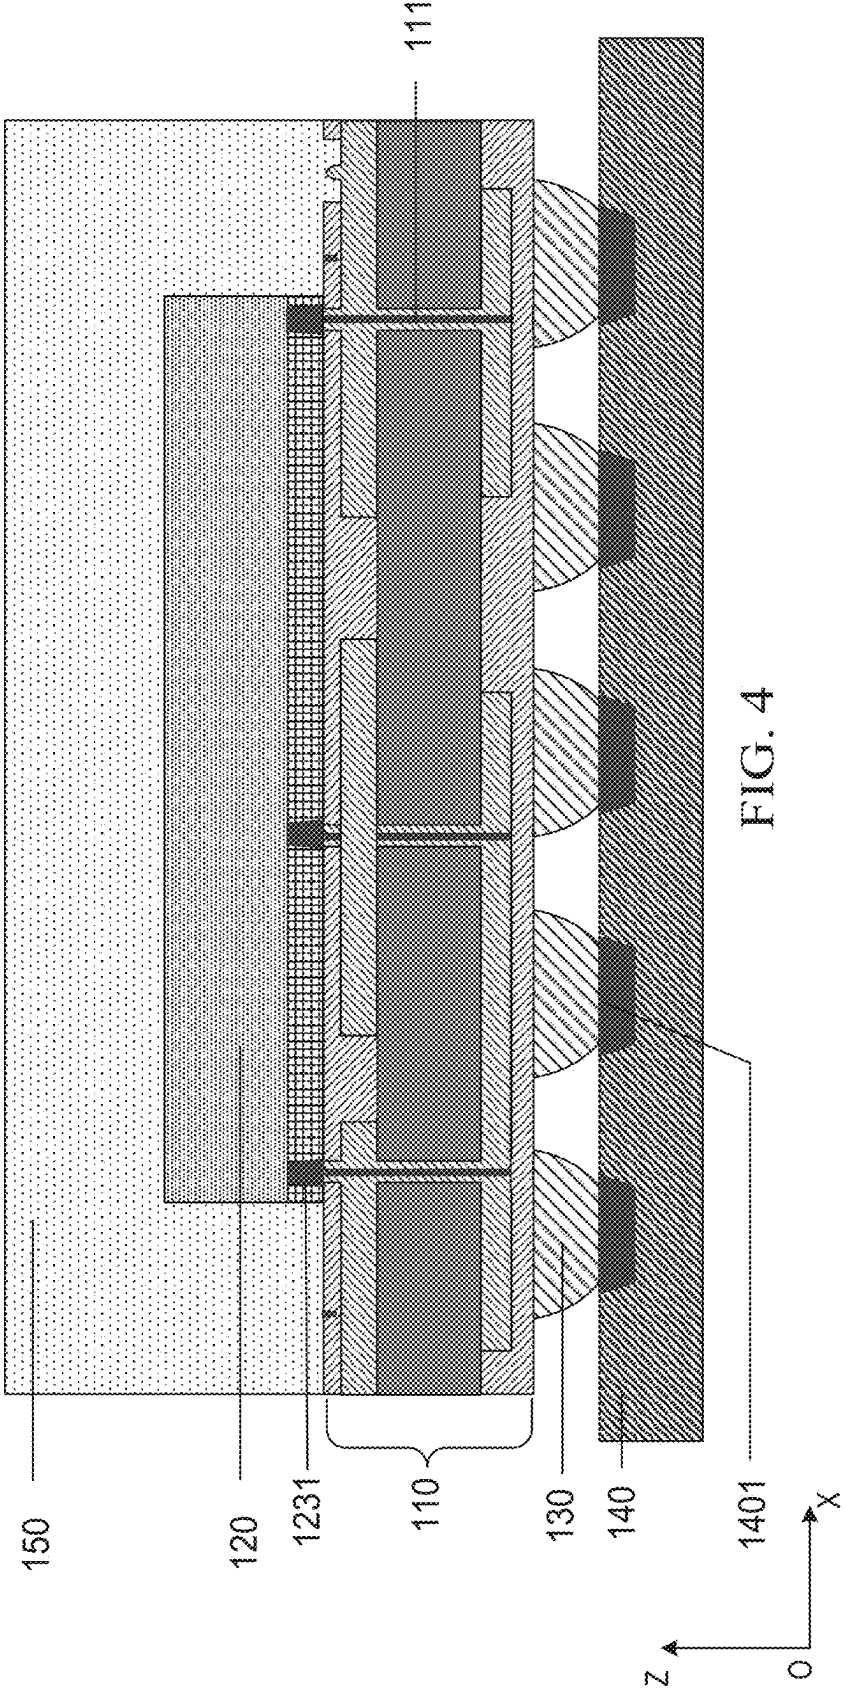


FIG. 4

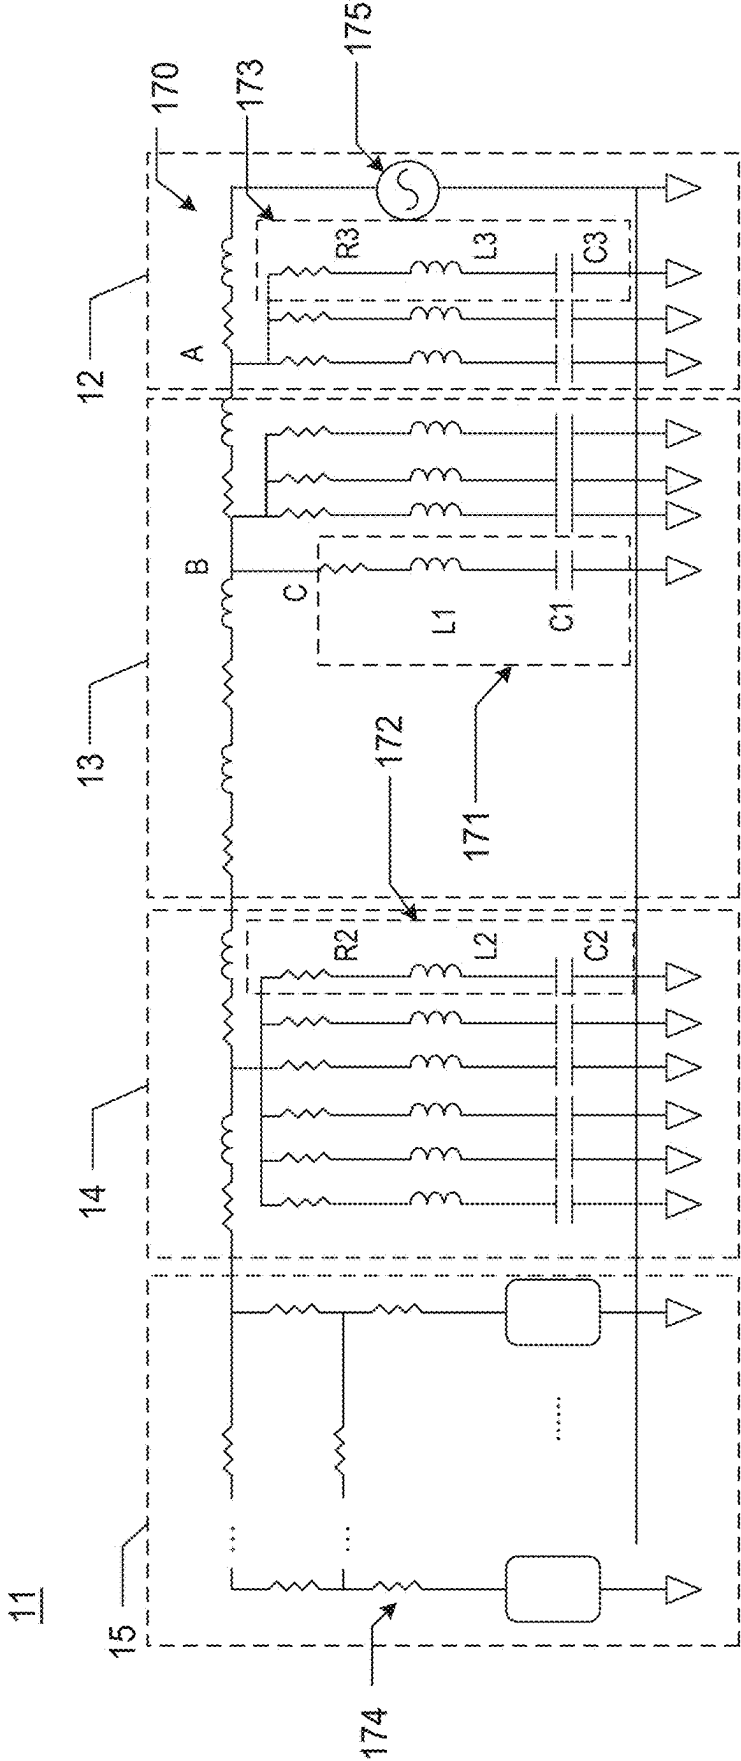


FIG. 5


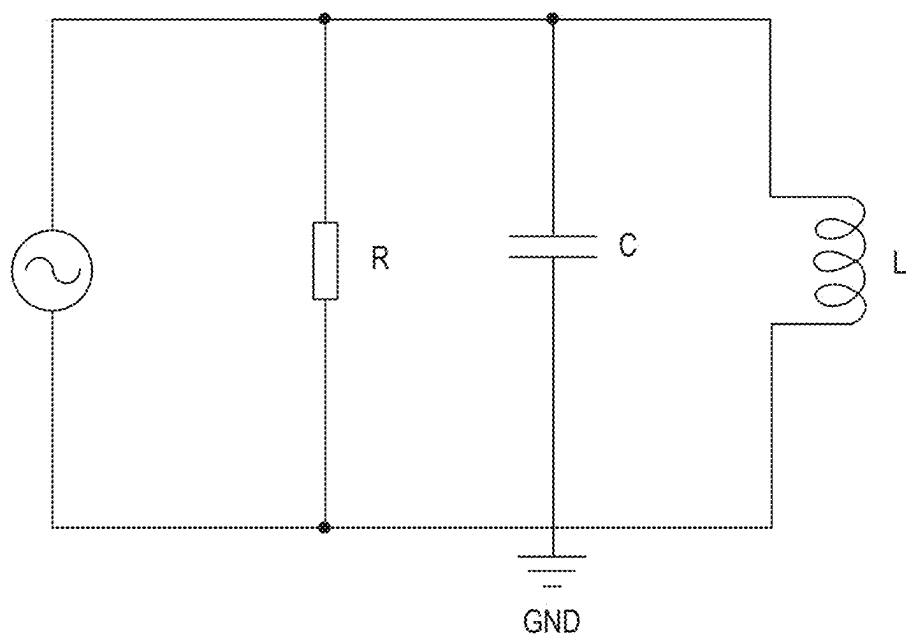


FIG. 6

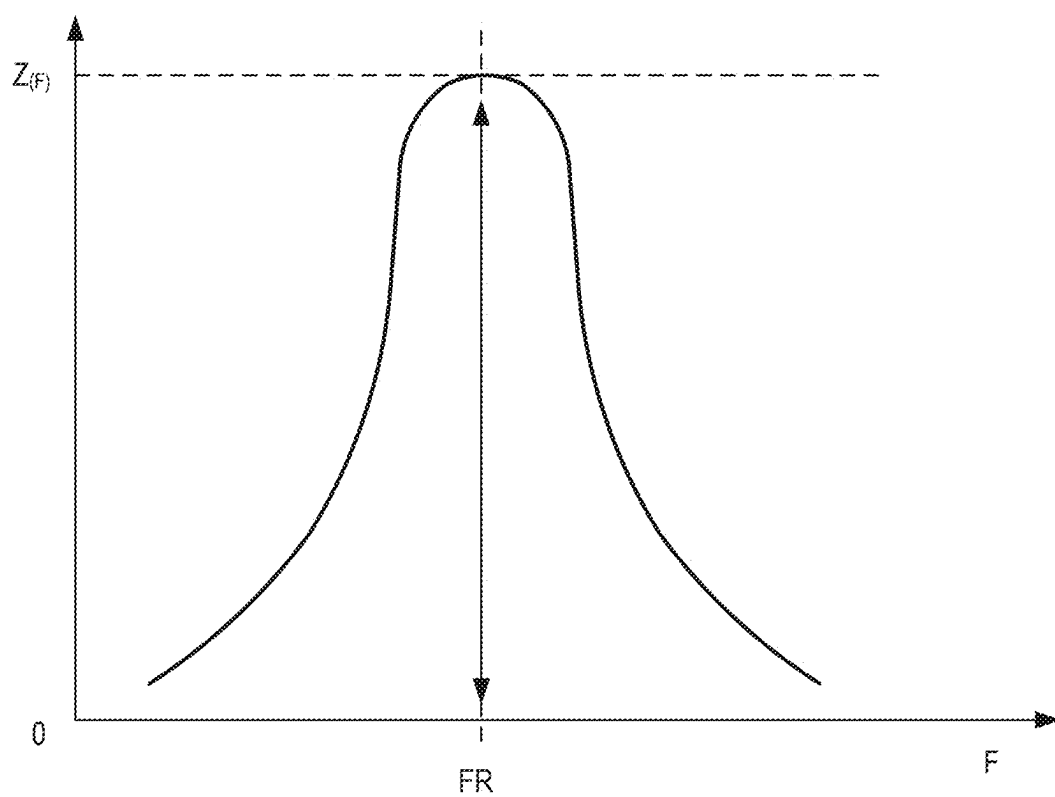

PARALLEL RESONANCE

FIG. 7

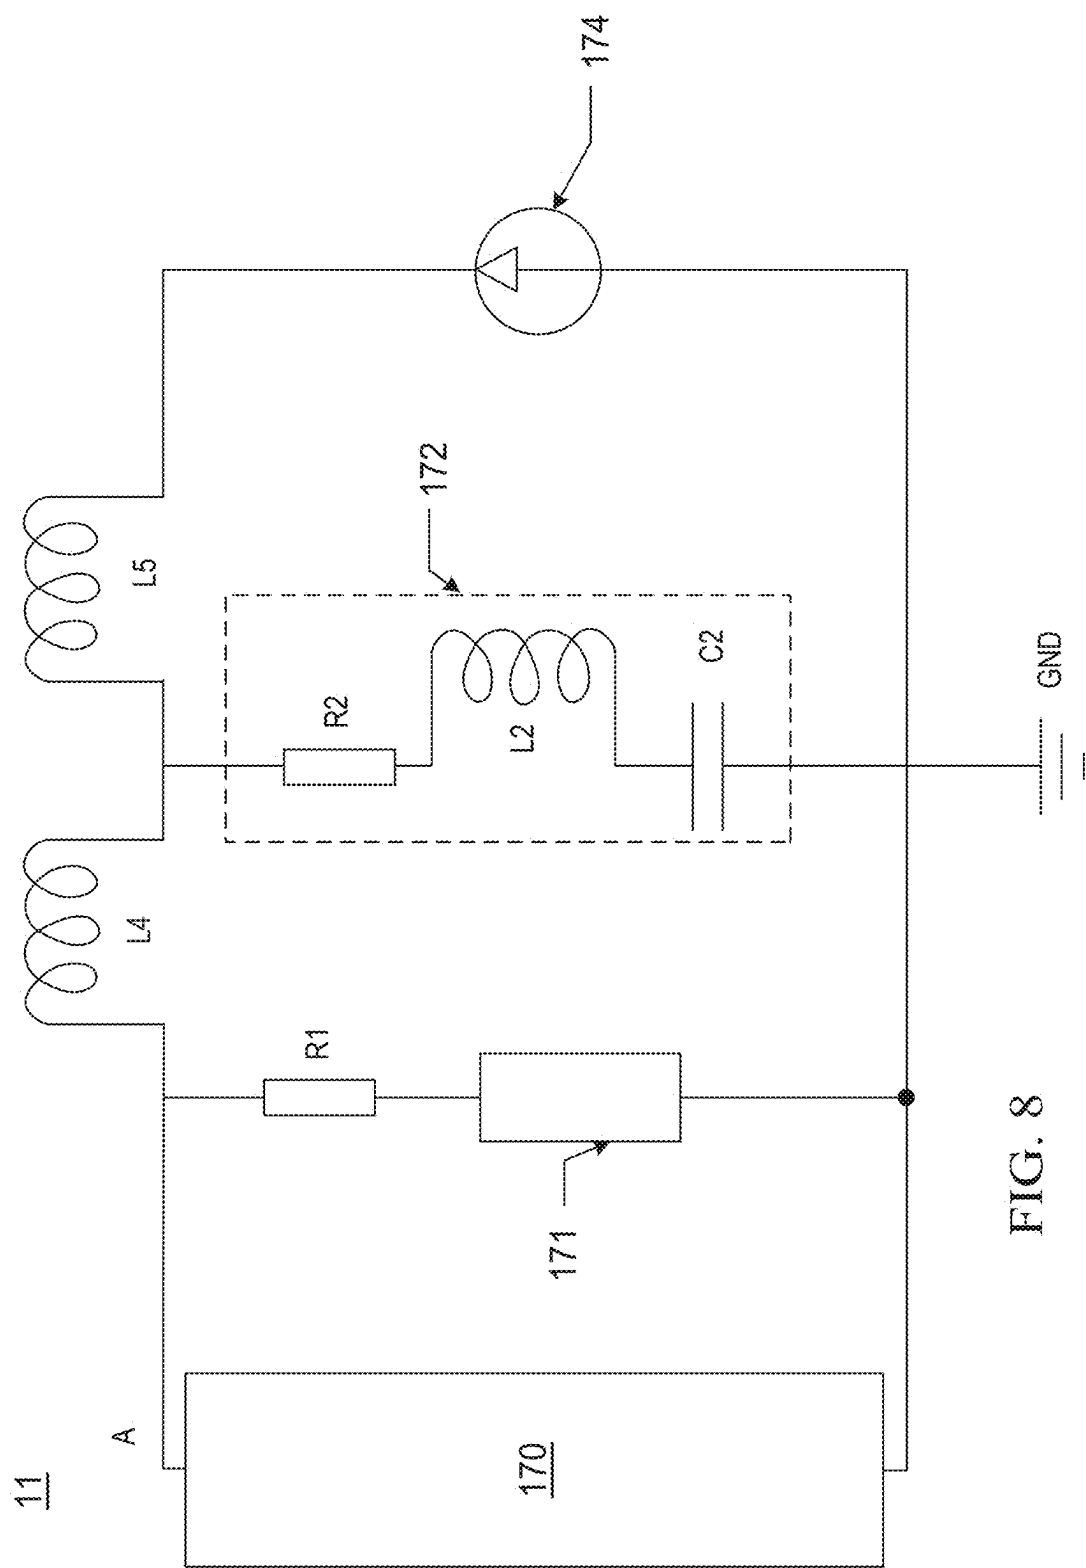
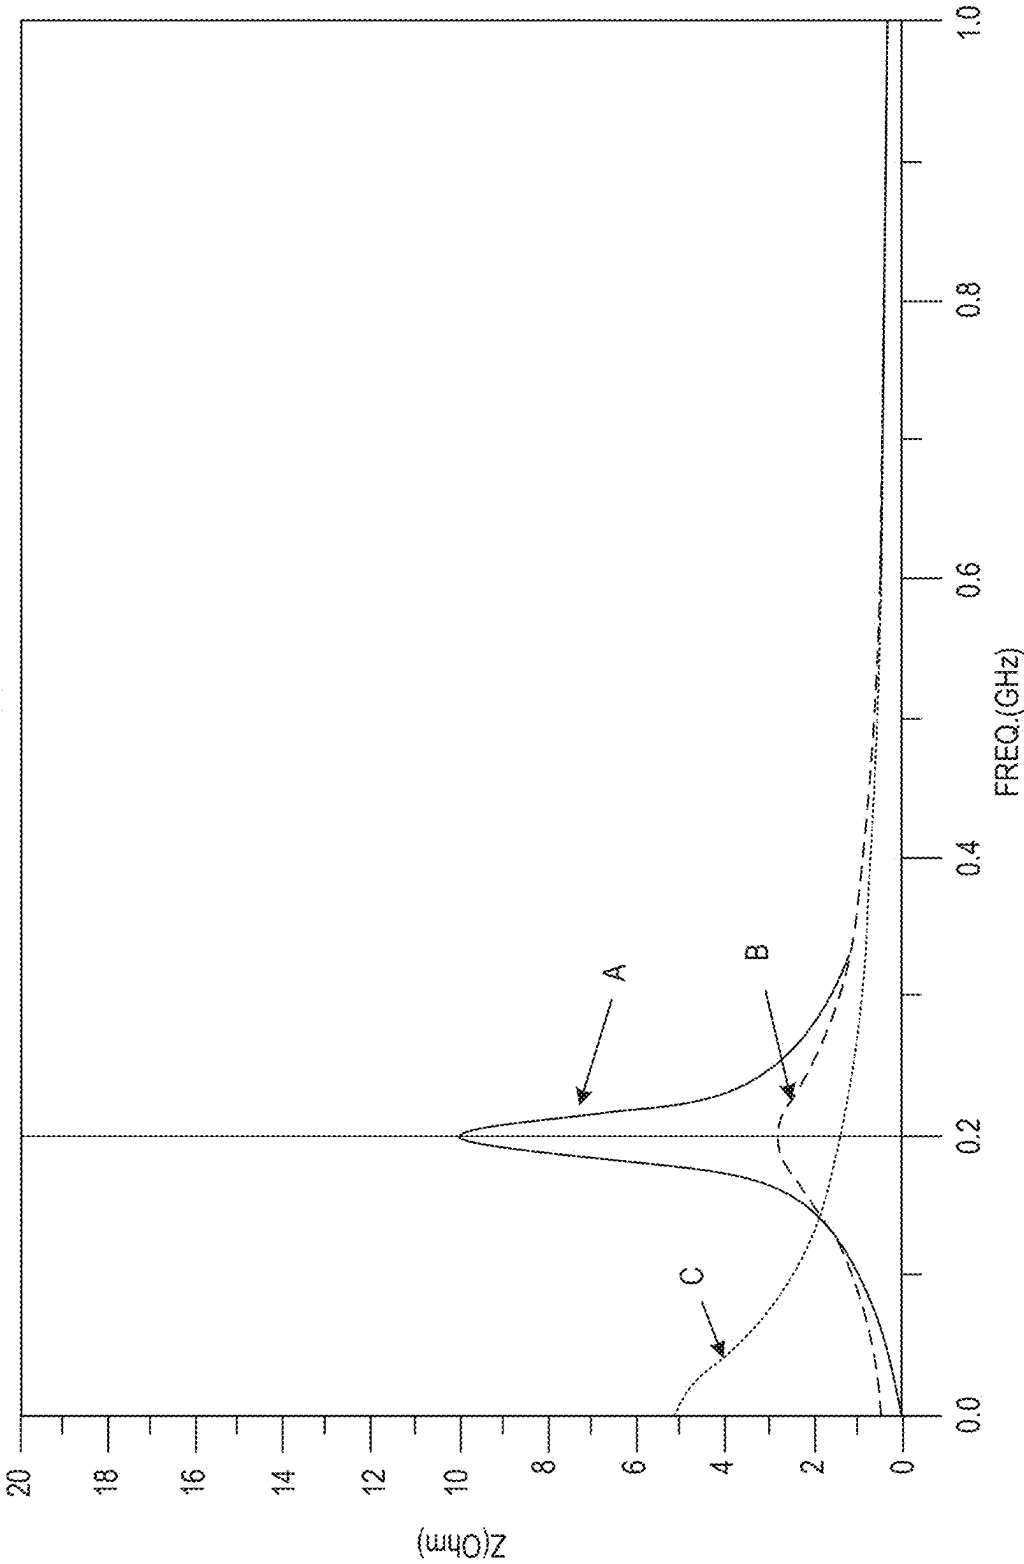


FIG. 8

FIG. 9



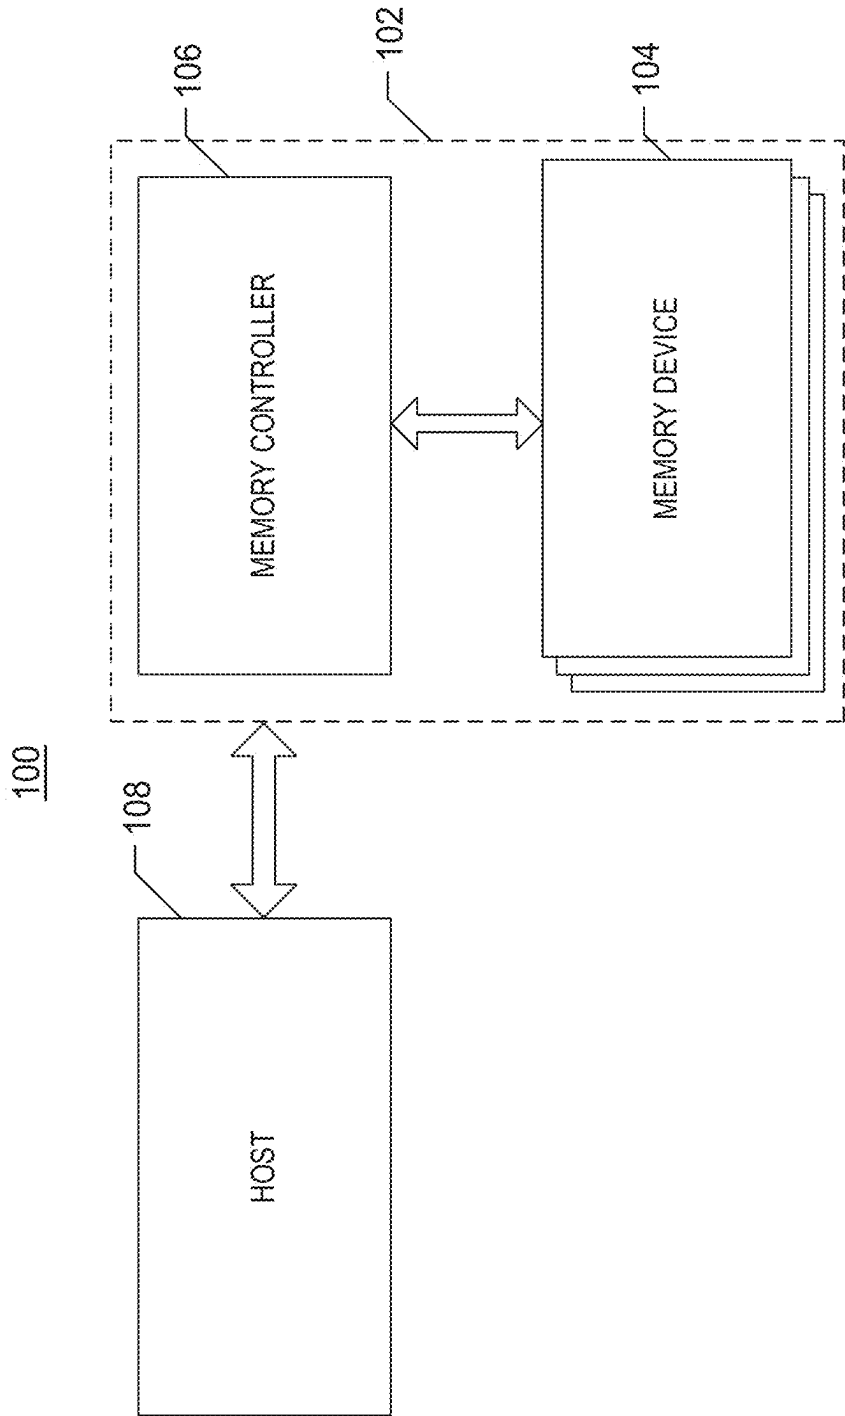


FIG. 10

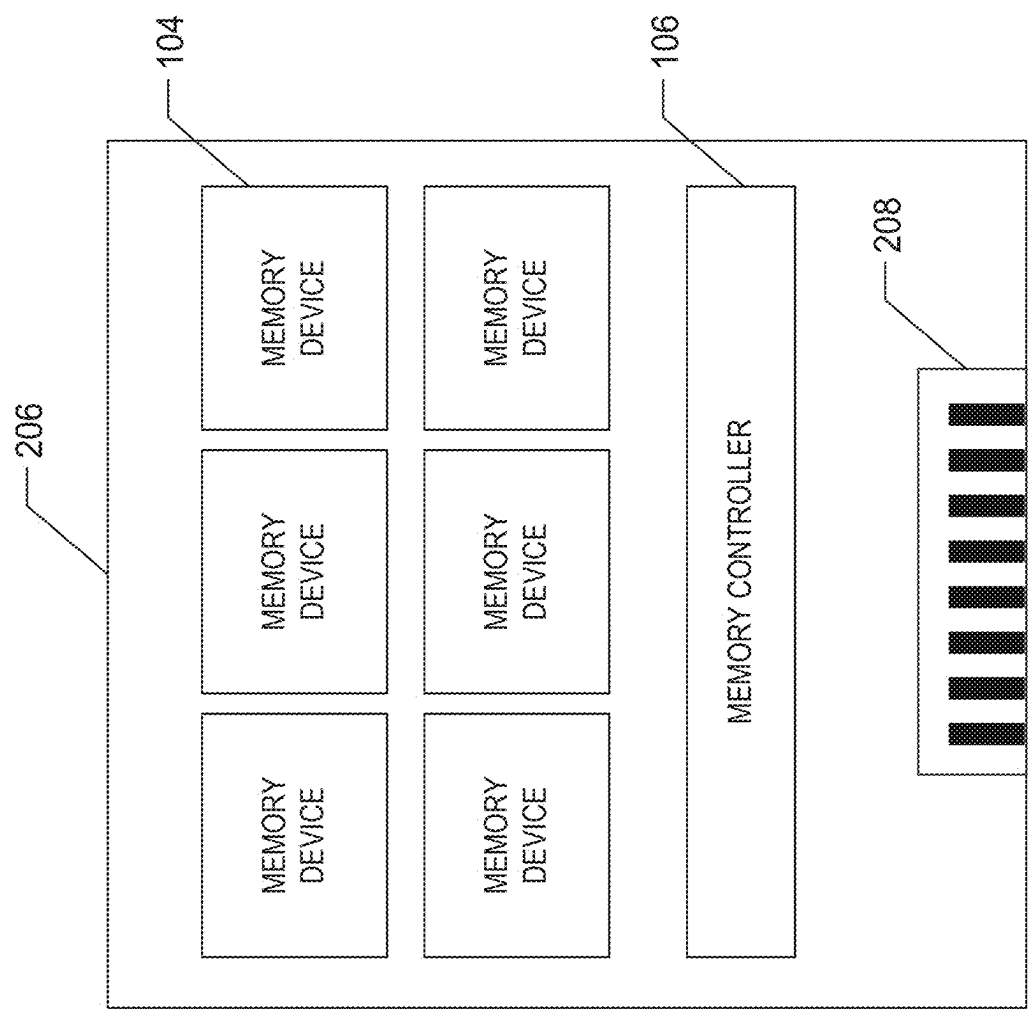


FIG. 11B

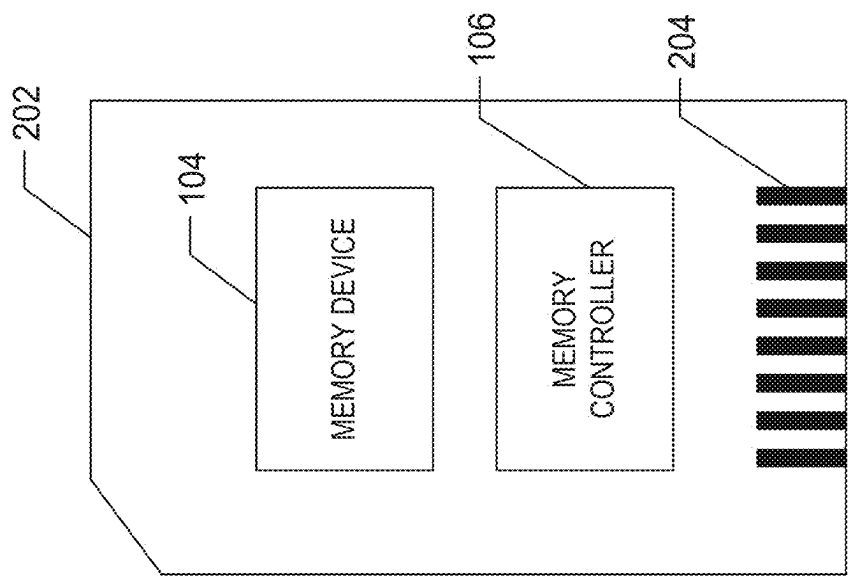
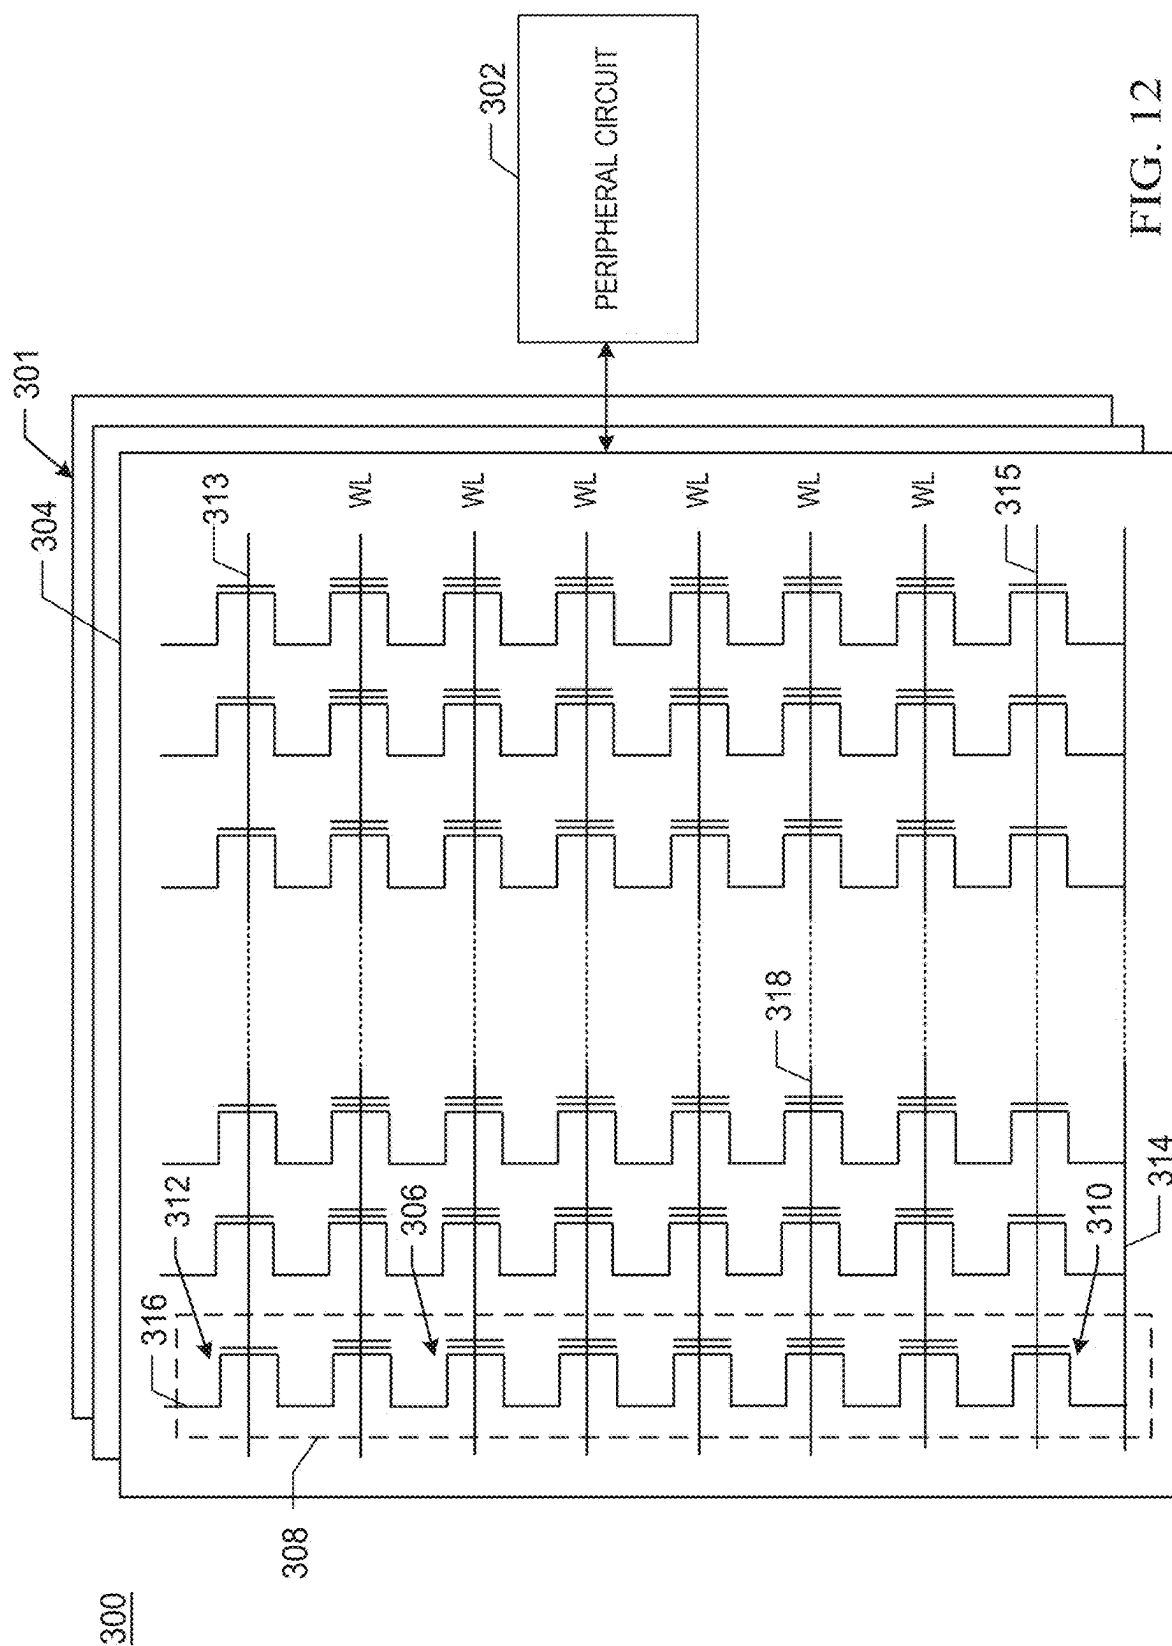


FIG. 11A




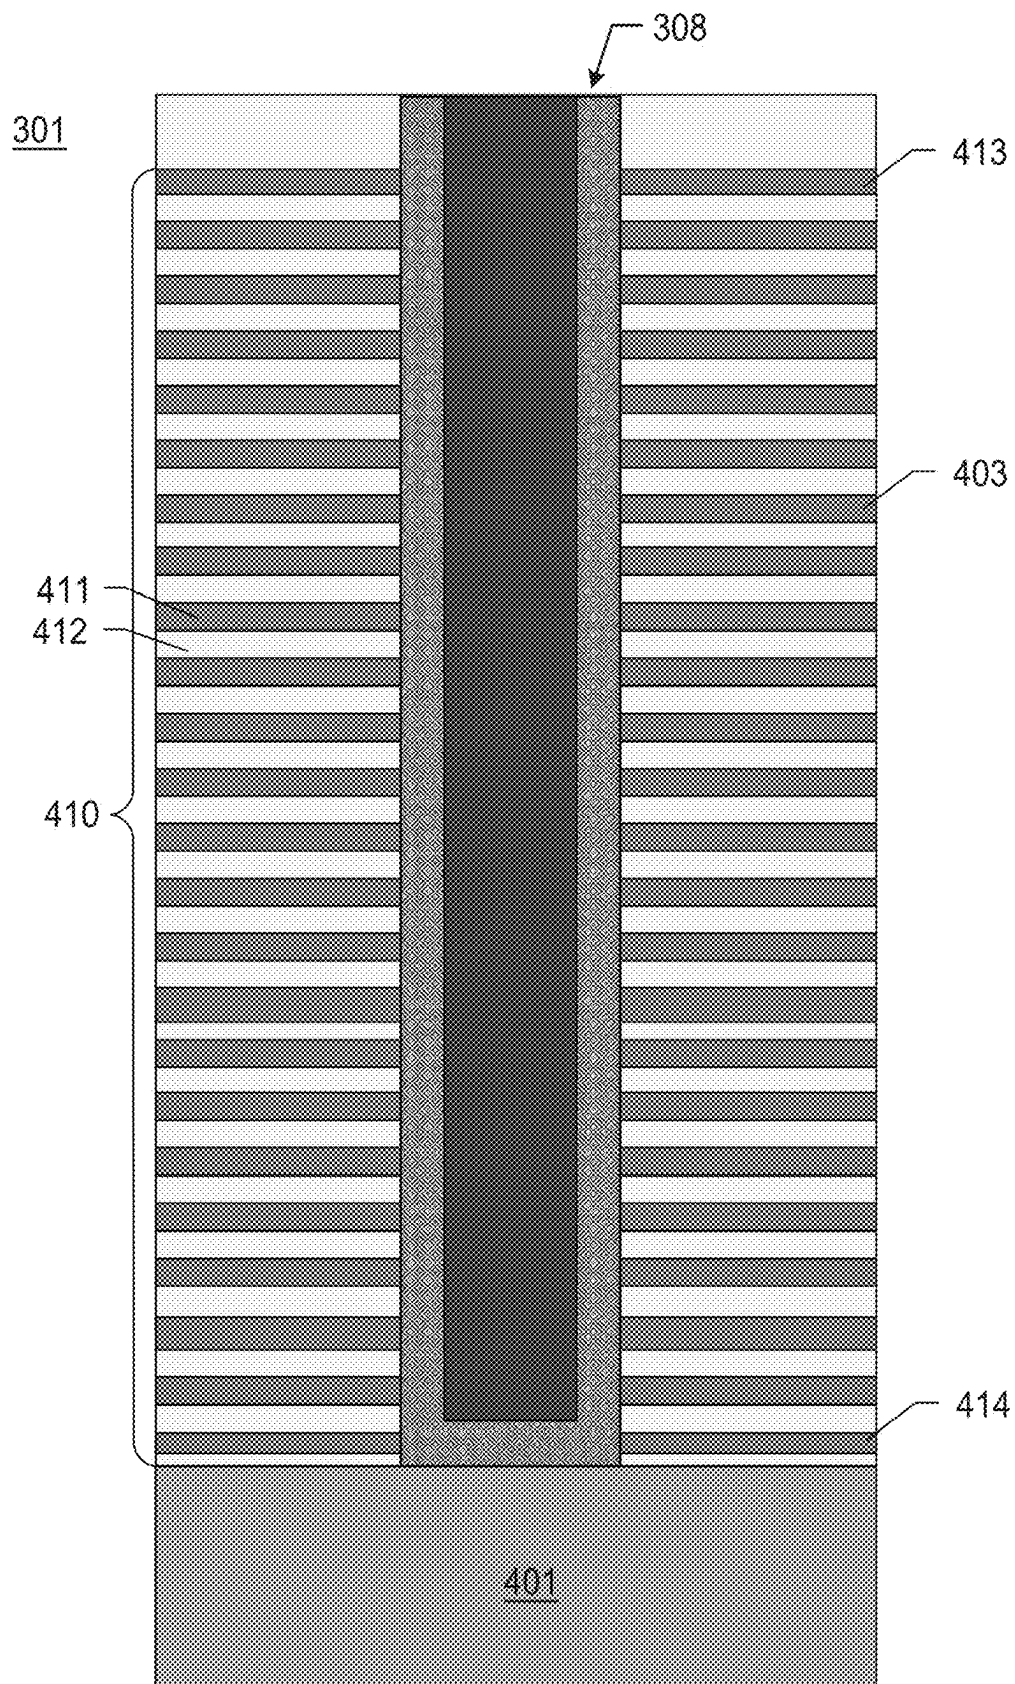


FIG. 13

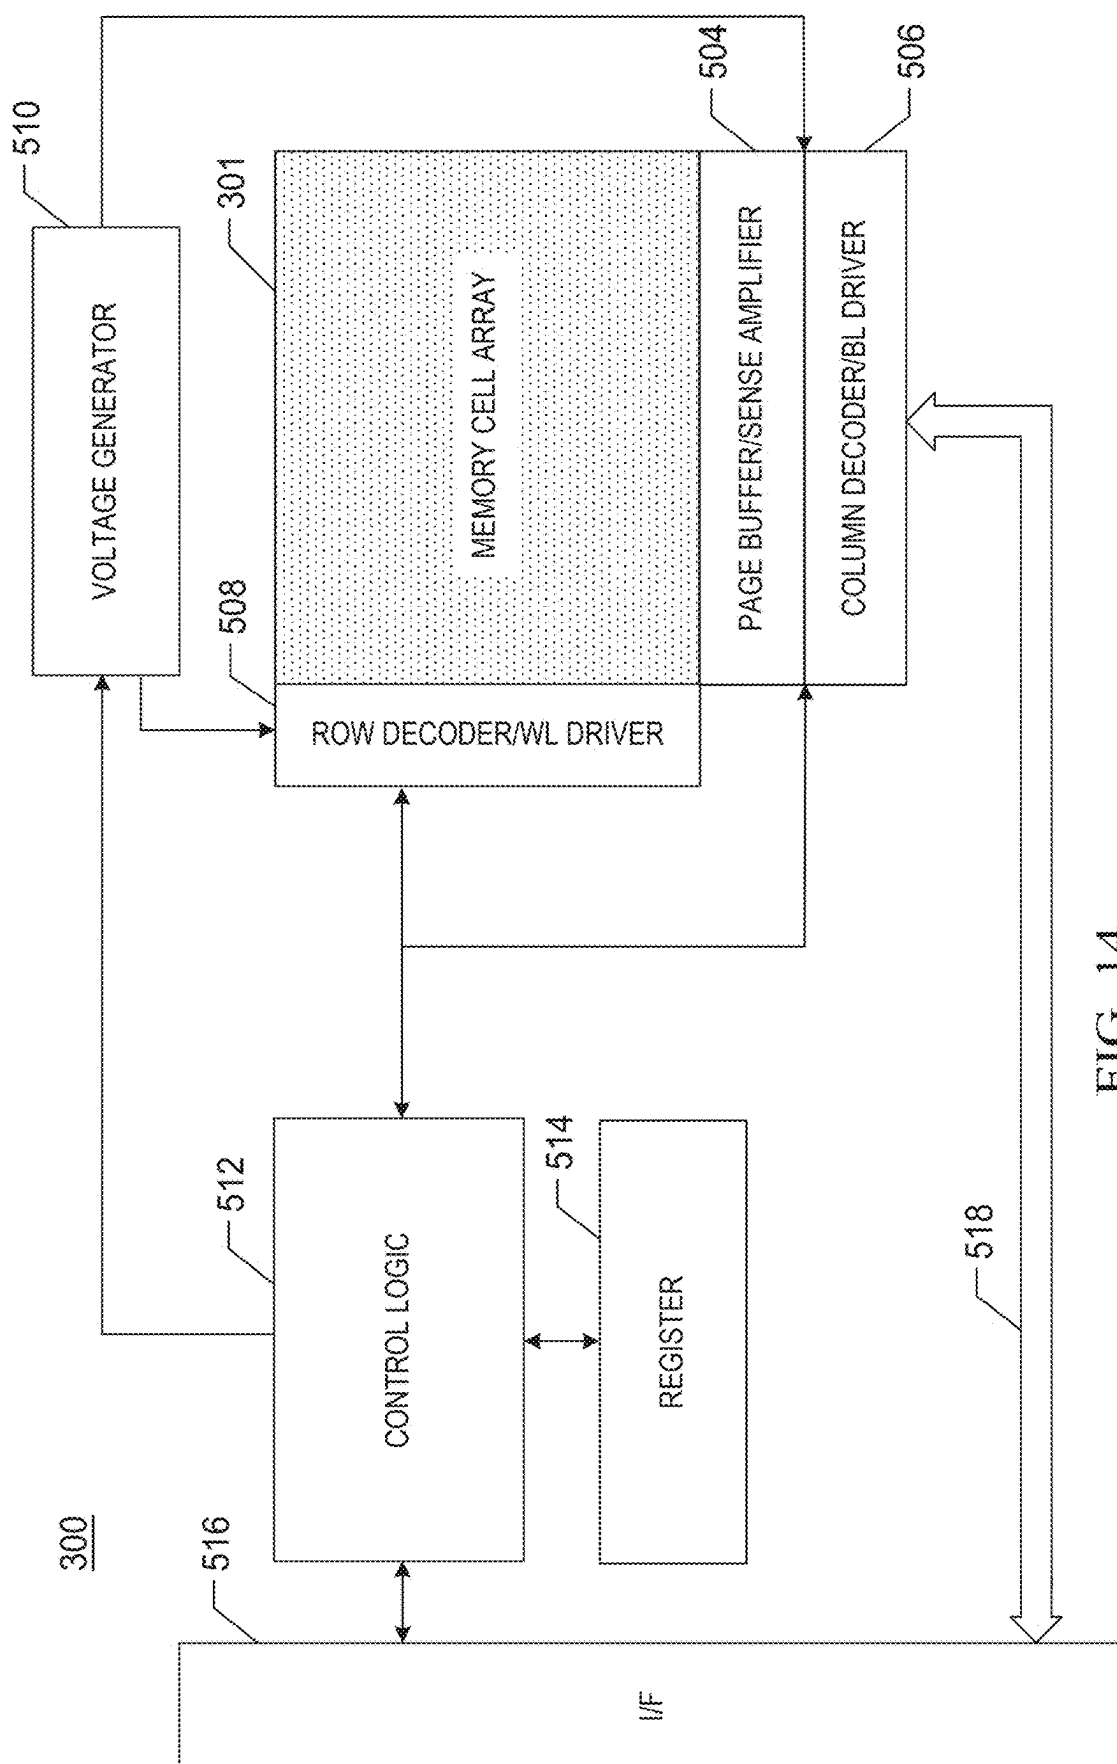

ELECTRONIC DEVICES, ELECTRONIC SYSTEMS, AND POWER SUPPLY CIRCUITS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims Chinese Patent Application No. 2024102245736, which was filed Feb. 28, 2024, is titled “ELECTRONIC DEVICES, ELECTRONIC SYSTEMS AND POWER SUPPLY CIRCUITS,” and is hereby incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of semiconductor technology, and in examples to electronic devices, electronic systems and power supply circuits.

BACKGROUND

[0003] During semiconductor fabrication, fabrication about a wafer is done, then the wafer is cut into one or more dies, and the dies are packaged using a packaging substrate and other packaging materials to obtain the package structure so as to avoid direct contact between the dies and the external environment and reduce damages to the dies. The package structure is applied in various integrated circuits to give play to electrical performance of the dies.

[0004] The package structure is coupled to a printed circuit board (PCB) through plugging, adhesion, soldering or the like to integrate the package structure onto the printed circuit board, on which some circuits or devices can supply power to the package structure.

SUMMARY

[0005] According to some aspects of implementations of the present disclosure, an electronic device is provided, the electronic device including: a power supply structure including a node, through which a voltage is supplied; and a first circuit having its one end coupled to the node via a first resistor and the other end grounded; and a package structure including a second circuit and a die circuit that are connected in parallel between the node and a grounding node, wherein the second circuit, the first circuit and the first resistor are equivalent to a parallel resistor-inductor-capacitor circuit.

[0006] In some implementations, the first circuit includes a first capacitor and a first inductor connected in series.

[0007] In some implementations, the electronic device includes a plurality of first circuits connected in parallel, wherein the first resistor is connected in series with one of the plurality of first circuits nearest to the second circuit.

[0008] In some implementations, the second circuit includes: a second resistor, a second inductor and a second capacitor connected in series, wherein one end of the second circuit is coupled to the node and the other end of the second circuit is grounded.

[0009] In some implementations, the power supply structure further includes: a third circuit, wherein one end of the third circuit is coupled to the node and the other end of the third circuit is grounded, and the third circuit is connected with the first circuit in parallel and includes a third resistor, a third inductor and a third capacitor connected in series.

[0010] In some implementations, the power supply structure further includes a voltage generating circuit having its output terminal coupled to the node.

[0011] In some implementations, the electronic device further includes a fourth inductor, through which one end of the second circuit is coupled to the node.

[0012] In some implementations, the package structure further includes a fifth inductor, through which the die circuit is coupled to the node.

[0013] In some implementations, the first resistor has a resistance value in the range of 0.5 Ohm~5 Ohm, and the operating frequency of the die circuit is in the range of 0~300 MHz.

[0014] In some implementations, the electronic device further includes: a first substrate, on which the power supply structure is located, wherein the package structure further includes a second substrate, the second circuit is located on and/or in the second substrate, and the die circuit is located on the second substrate, and the surface of the first substrate on the side having the first circuit disposed thereon is fixed to the surface of the second substrate on the side away from the die circuit.

[0015] In some implementations, the package structure includes: a semiconductor device including the die circuit, wherein the semiconductor device is located on the second substrate.

[0016] According to some aspects of implementations of the present disclosure, an electronic system is provided, the electronic system including the described electronic device, wherein the package structure includes at least one of a memory device or a memory controller that is coupled to the memory device and is configured to control the memory device.

[0017] According to some aspects of implementations of the present disclosure, a power supply circuit is provided, the power supply circuit including: a node, through which a package structure is supplied with power; and a first circuit having its one end coupled to the node via a first resistor and the other end grounded, wherein the package structure includes a second circuit and a die circuit that are connected in parallel between the node and a grounding node, and the second circuit, the first circuit and the first resistor are equivalent to a parallel resistor-inductor-capacitor circuit.

[0018] In some implementations, the first circuit includes a first capacitor and a first inductor connected in series.

[0019] In some implementations, the power supply circuit includes a plurality of first circuits connected in parallel, wherein the first resistor is connected in series with one of the plurality of first circuits nearest to the second circuit.

[0020] In some implementations, the second circuit includes: a second resistor, a second inductor and a second capacitor connected in series, wherein one end of the second circuit is coupled to the node and the other end of the second circuit is grounded.

[0021] In some implementations, the power supply circuit further includes: a third circuit, wherein one end of the third circuit is coupled to the node and the other end of the third circuit is grounded, and the third circuit is connected with the first circuit in parallel and includes a third resistor, a third inductor and a third capacitor connected in series.

[0022] In some implementations, the power supply circuit further includes a voltage generating circuit having its output terminal coupled to the node.

[0023] In some implementations, the power supply circuit further includes a fourth inductor, through which one end of the second circuit is coupled to the node.

[0024] In some implementations, the package structure further includes a fifth inductor, through which the die circuit is coupled to the node.

[0025] In some implementations, the first resistor has a resistance value in the range of 0.5 Ohm~5 Ohm, and the operating frequency of the die circuit is in the range of 0~300 MHz.

[0026] The implementations of the present disclosure provide an electronic device including: a power supply structure, a first circuit and a package structure, wherein the package structure includes a second circuit and a die circuit, one end of the first circuit is coupled to a node of the power supply structure via a first resistor, and the second circuit and the die circuit are connected in parallel between the node and a grounding node, and the node provides voltages for supplying power to the package structure, so that the die circuit in the package structure may give play to functions of control, storage, communication and the like. The second circuit, the first circuit and the first resistor may be equivalent to a parallel resistor-inductor-capacitor circuit (a parallel RLC circuit), the first resistor is configured to reduce the quality factor of the equivalent parallel RLC circuit, reduce oscillation of the power supply circuit and in turn the interference to the die circuit, reduce the resistance at the terminal of the die circuit and improve the reliability of power supply for the die circuit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] FIG. 1 is a first schematic diagram of a package structure illustrated according to an example implementation;

[0028] FIG. 2 is a second schematic diagram of a package structure illustrated according to an example implementation;

[0029] FIG. 3 is a third schematic diagram of a package structure illustrated according to an example implementation;

[0030] FIG. 4 is a fourth schematic diagram of an electronic device illustrated according to an example implementation;

[0031] FIG. 5 is a schematic circuit diagram of an electronic device illustrated according to an example implementation;

[0032] FIG. 6 is an equivalent diagram of an electronic device illustrated according to an example implementation;

[0033] FIG. 7 is a curve chart illustrating resistance vs. frequency according to an example implementation;

[0034] FIG. 8 is an equivalent diagram of an electronic device according to an implementation of the present disclosure;

[0035] FIG. 9 is a curve chart illustrating a resistance test of an electrical device illustrated according to an implementation of the present disclosure;

[0036] FIG. 10 is a schematic diagram of an example system illustrated according to an implementation of the present disclosure;

[0037] FIG. 11A is a schematic diagram of an example memory card illustrated according to an implementation of the present disclosure;

[0038] FIG. 11B is a schematic diagram of an example solid state drive (SSD) illustrated according to an implementation of the present disclosure;

[0039] FIG. 12 is a schematic diagram of an example memory device illustrated according to an implementation of the present disclosure;

[0040] FIG. 13 is a cross-sectional diagram of an example memory cell array illustrated according to an implementation of the present disclosure;

[0041] FIG. 14 is a schematic diagram of another example memory device illustrated according to an implementation of the present disclosure;

[0042] In the above-described accompanying drawings (not necessarily drawn to scale), similar reference numerals may designate similar components in different figures. Similar reference numerals with different character suffixes may designate different instances of similar components. For the purpose of illustration rather than limitation, the accompanying drawings illustrate individual implementations to be discussed herein.

DETAILED DESCRIPTION

[0043] Hereinafter, example implementations disclosed by the present disclosure will be described in more detail with reference to accompanying drawings. Although example implementations of the present disclosure are illustrated in accompanying drawings, it should be understood that the present disclosure can be embodied in various forms and is not limited to the detailed description described herein. On the contrary, these implementations are provided for more thorough understanding of the present disclosure and to convey the scope disclosed by the present disclosure fully to those skilled in the art.

[0044] In the description hereafter, many details are provided to facilitate more thorough understanding of the present disclosure. However, it is apparent for those skilled in the art that the present disclosure can be implemented without one or more of these details. In other examples, in order not to obscure the present disclosure, some technical features well known in the art will not be described. That is to say, not all features of practical implementations will be described herein and well-known functions and structures will not be described in detail.

[0045] It should be appreciated that when an element or a layer is said to be “over”, “adjacent to”, “connected to” or “coupled to” another element or layer, it may be directly over, adjacent to, connected to or coupled to the another element or layer or an intervening element or layer may exist therebetween. On the contrary, when an element is said to be “directly on”, “directly adjacent to”, “directly connected to” or “directly coupled to” another element or layer, there is no intervening element or layer therebetween. It should be appreciated that although various elements, components, regions, layers and/or parts may be described using terms “first”, “second”, “third” or the like, they should be not limited by those terms. The terms are only used to distinguish one element, component, region, layer or part from another element, component, region, layer or part. Therefore, a first element, component, region, layer or part discussed hereafter may be instead expressed as a second element, component, region, layer or part without departing from the teaching of the present disclosure. When a second element, component, region, layer or part is in discussion, it is not intended to indicate that a first element, component, region, layer or part must exist.

[0046] Spatially relative terms, such as “below”, “beneath”, “lower”, “under”, “over” and “above”, are used

herein for ease of description to explain the relationship of one element or feature with other elements or features as shown in the figures. It should be appreciated that, in addition to the orientations shown in the figures, different orientations of devices in use and operation are also intended to be covered by those spatially relative terms. For example, if a device in the drawing is turned upside down, the element or feature described to be “beneath”, “under” or “below” another element or feature will have the orientation of being “over” the another element or feature. Therefore, example terms “beneath” and “under” may include orientations of both “below” and “above”. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein may likewise be interpreted accordingly.

[0047] Terminology is used herein only for description of implementations and in no way for limiting the present disclosure. As used herein, the terms “a”, “an” and “the” in singular forms are also intended to cover plural forms, unless the context clearly indicates otherwise. It should be also appreciated that terms “comprise”, “comprising”, “include” and/or “including”, as used in the specification, specify presence of the described features, integers, steps, operations, elements and/or components, but do not exclude presence or addition of one or more other features, integers, steps, operations, elements, components and/or combinations thereof. As used herein, the term “and/or” includes any and all combinations of relevant listed items.

[0048] It should be understood that “some implementations” or “an implementation” mentioned throughout the specification means that particular features, structures or characteristics in association with the implementation may be included in at least one implementation of the present disclosure. Therefore, “in some implementations” or “in an implementation” mentioned throughout the specification refers not necessarily to the same implementations. Moreover, these particular features, structures or characteristics may be incorporated in one or more implementations in any suitable manner. It should be understood that, in various implementations of the present disclosure, the ordinal numbers of the various processes above are not intended to indicate that the processes must be performed in any sequential order, and the various processes should be performed in a sequential order determined depending on their functions and inherent logic, and should not constitute any limitation on implementation processes of implementations of the present disclosure.

[0049] A semiconductor packaging process may include: providing a semiconductor device having an electrical function; placing the semiconductor device on a packaging substrate; and enclosing the semiconductor device with packaging materials. The semiconductor devices may be coupled through the packaging substrate. Conductive contacts and conductive balls are disposed on the surface of the packaging substrate on the side without the semiconductor device. The conductive balls may lead out an electrical signal from the packaging substrate to achieve interconnection of electrical signal between the semiconductor device and an external integrated circuit. The conductive balls or contacts may be or not be a portion of a package structure and may be fixed and coupled to conductive contacts on a printed circuit board through soldering or may be fixed to the printed circuit board by plugging snap fasteners with the

conductive balls being in contact with and coupled to conductive contacts on the printed circuit board in a non-soldering way.

[0050] One semiconductor device may include one or more semiconductor dies and one package structure may package one or more semiconductor devices. That is to say, one package structure may package one or more semiconductor dies, and one semiconductor die may be one cut from a wafer after fabrication along a predetermined dicing street or dicing line. Then the package structure is integrated onto the printed circuit board through soldering, adhesion or plugging to achieve electrical functions of the semiconductor device or semiconductor die.

[0051] A plurality of package structures, wirings or other electronic elements may be integrated onto the printed circuit board. For example, the printed circuit board may have a power supply structure disposed thereon, which may be input with external DC or AC power and output voltages required by the package structures to the package structures after voltage conversion. The printed circuit board may be a first substrate and the packaging substrate of the package structure may be a second substrate.

[0052] In some implementations, with reference to FIG. 1, an example structure of a package structure 10 is provided, the example structure including: a second substrate 110 (a packaging substrate) having a first surface and a second surface disposed opposite to each other in a z direction, wherein the z direction may be the thickness direction of the second substrate 110, the first surface may be the upper surface in the positive z direction and the second surface may be the lower surface in the negative z direction; and a semiconductor device 120 located on the first surface, wherein the area of the first surface of the second substrate 110 may be larger than the area of the semiconductor device 120. The second substrate 110 may provide the semiconductor device 120 with mechanical support, and also an electrically leading out structure to lead out electrical signals from the semiconductor device 120, enabling interconnection of electrical signals with the structure such as an external printed circuit board or with other integrated circuit devices. The second substrate 110 may include a semiconductor material such as a silicon interposer, a germanium interposer or the like, and may further include organic resin, glass, ceramic or the like.

[0053] In some implementations, with reference to FIG. 1, the semiconductor device 120 has a first face and a second face disposed opposite to each other in the z direction, the first face may be the upper surface of the semiconductor device 120 in the positive z direction and the second face may be the lower surface of the semiconductor device 120 in the negative z direction. A plurality of first conductive contacts 1231 may be disposed on the second face of the semiconductor device 120 and configured for coupling to an interconnection layer (or a conductive layer, a conductive line or a conductive structure) on the second substrate 110. The interconnection layer may be a power distribution network (PDN) or a portion thereof and may include, but not limited to, conductive lines, conductive pathways (conductive plugs), conductive contacts, pads or other conductive structure. The power distribution network may further include capacitors, inductors, resistors, grounding nodes or other device structures on the second substrate 110 and the printed circuit board, and may further include a voltage regulator module (VRM) or a voltage generator module on

the printed circuit board. The voltage regulator module may include a DC-DC converter, sense the load voltage of the package structure **10**, and control the load voltage by adjusting the duty cycle, so that the package structure **10** is provided with the voltage it needs. In this implementation, the power distribution network provided by the second substrate **110** may be a portion of the second substrate **110**. A portion of the power distribution network may be located on the upper surface of the second substrate **110**, a portion of the power distribution network may be in the second substrate **110**, and another portion of the power distribution network may be located on the lower surface of the second substrate **110**. The portion of the power distribution network on the upper surface of the second substrate **110** and the portion of the power distribution network on the lower surface may be coupled together through first conductive pathways **111** penetrating through the second substrate **110**. The first conductive pathways **111** are coupled to the first conductive contacts **1231** of the semiconductor device **120** to lead the electrical signal of the semiconductor device **120** out to the lower surface of the second substrate **110**.

[0054] In some implementations, with reference to FIG. 1, the package structure **10** further includes second conductive contacts **130** that may protrude from the lower surface of the second substrate **110**, be flush with the second substrate **110** or recessed from the lower surface toward the upper surface of the second substrate **110**. The second conductive contacts **130** may be conductive balls, conductive pads or conductive pillars and the implementations of the present disclosure are not limited in shape of the second conductive contacts **130**. The second conductive contacts **130** may be coupled to the conductive structures such as the interconnection layer of the second substrate **110** or the first conductive pathways **111** to lead out the electrical signal of the semiconductor device **120**. The first conductive contacts **1231** may be fixed onto the printed circuit board through soldering or plugging to be coupled with the conductive contacts on the printed circuit board to enable power supply or communication of signals. In some other implementations, the second substrate **110** only provides mechanical support to the semiconductor device **120** and there is no conductive structure disposed on the two surfaces of the second substrate **110** and inside second substrate **110**. Lines lead out from the lateral sides of the semiconductor device **120** as pins, which are soldered to conductive contacts of the printed circuit board to enable the interconnection of electrical signal and fixation. A recess may be disposed in the upper surface of the second substrate **110**. The recess has its opening facing the positive z direction and may provide an accommodating space for the semiconductor device **120**, facilitating fixation of the semiconductor device **120** to provide better protection.

[0055] In some implementations, with reference to FIG. 2, a plurality of third conductive contacts **1232** are disposed on the upper surface of the semiconductor device **120** and coupled to the contacts on the second substrate **110** through leads. Illustratively, the first conductive contacts **1231**, the second conductive contacts **130**, the third conductive contacts **1232**, the first conductive pathways **111**, the leads and other conductive structures may include but are not limited to copper, gold, silver, platinum, aluminum, tungsten, chromium, nickel, titanium, tin or any other conductive material.

[0056] In some implementations, the semiconductor device **120** may include a plurality of stacked semiconductor dies. With reference to FIG. 3, the semiconductor device **120**

may include a first semiconductor die **121** and a second semiconductor die **122**. The first semiconductor die **121** and the second semiconductor die **122** may be bonded together via bonding layers with a plurality of bonding contacts, through which electrical signals can be communicated. The package structure **10** further includes second conductive pathways **1241** penetrating through the first semiconductor die **121** and third conductive pathways **1242** penetrating through the second semiconductor die **122**. The second conductive pathways **1241** and the third conductive pathways **1242** may be coupled together through bonding contacts. The semiconductor device **120** in the implementation of the present disclosure is not limited with respect to the number and type of the stacked semiconductor dies. Three, four or even more layers of semiconductor dies may be stacked, or a plurality of semiconductor dies may be arranged laterally in the x direction.

[0057] Illustratively, the semiconductor device **120** may include one or more of the following dies: a radio frequency (RF) die, a positioning (GPS) die, a memory (DRAM) die, a memory (NAND flash) die, a blue-tooth die and a control die. Illustratively, the package structure **10** in the implementation of the present disclosure may be applied in a mobile apparatus, and may include, but not limited to, a product executing the HBM protocol, a product executing the HMC protocol, a product executing the Chiplet protocol, a product executing the UFS protocol, a product executing the eMMC protocol or a product executing other protocol.

[0058] Illustratively, the first semiconductor die **121** and the second semiconductor die **122** may both be NAND flash dies; the first semiconductor die **121** may be a DRAM die and the second semiconductor die **122** may be an NAND flash die; or the first semiconductor die **121** may be a logical die and the second semiconductor die **122** may be an NAND flash die or a DRAM die. The package structure **10** may be a system on a chip (SOC).

[0059] In some implementations, with reference to FIGS. 1 to 3, the package structure **10** further includes a covering layer **150** located over the upper surface of the second substrate **110** to wrap the semiconductor device **120** and meanwhile cover at least a portion of the upper surface of the second substrate **110**. The lower surface of the semiconductor device **120** is not in contact with the covering layer **150**, which covers the upper surface and lateral surfaces of the semiconductor device **120**.

[0060] In some implementations, the covering layer **150** may include a single layer of insulating material such as silicon oxide, silicon nitride, silicon oxynitride, resin or another insulating material. The covering layer **150** provides protection and mechanical support to the semiconductor device **120**, so as to reduce damages to the package structure **10** such as chemical erosion, mechanical compression and vibration and thus improve reliability. The covering layer **150** may include a thermally conductive material, for example, an organosilicone thermally conductive material.

[0061] In some implementations, the covering layer **150** may include multiple layers of packaging materials, for example, an insulating layer and a shielding layer with the shielding layer covering the insulating layer and the insulating layer being located between the shielding layer and the semiconductor device **120**. The shielding layer may include, but not limited to, copper, gold, silver, platinum, aluminum, tungsten, chromium, nickel, titanium, tin, etc. The shielding layer may be a continuous film structure or a

grid structure. The insulating layer provides mechanical support and protection to the semiconductor device **120** and the shielding layer forms a Faraday ring (or a quasi Faraday ring) surrounding the semiconductor device **120** to reduce electromagnetic interference to the semiconductor device **120** and thus improve reliability. The shielding layer may be coupled to the grounding terminal on the second substrate **110** to discharge free charges on the shielding layer through the grounding terminal, reduce the electrostatic damages, improve the reliability and facilitate the heat dissipation of the package structure **10**. The covering layer **150** further includes a protecting layer covering the shielding layer to reduce oxidation of the shielding layer.

[0062] In some implementations, a package system **11** or an electronic device **11** is provided. The electronic device **11** may include at least one instance of the package structure **10** as shown in FIGS. **1** to **3**. The package structure **10** is located on a first substrate **140** that may include a printed circuit board. With reference to FIG. **4**, the case, in which one package structure **10** as shown in FIG. **1** is integrated on the first substrate **140**, is taken as an example. The first substrate **140** may have other package structures **10** integrated thereon and may further include an interconnection circuit, a voltage regulating module, a capacitor, a resistor, an inductor wiring terminal or other electronic element. The first substrate **140** is provided with fourth conductive contacts **1401**, which are coupled to the third conductive contacts **1232** to enable interconnection of electrical signals between the package structure **10** and the first substrate **140**. According to different package protocols or standards of the package structure **10**, the second conductive contacts **130** may be coupled to the fourth conductive contacts **1401** to constitute a supply voltage circuit of a power distribution network for providing the voltage to the semiconductor device **120**; the second conductive contact **130** may be coupled to the fourth conductive contacts **1401** to constitute a grounding circuit; the second conductive contact **130** may be coupled to the fourth conductive contacts **1401** to constitute a signal transmission link for transmission of control command signals for the semiconductor device and access request command signals from an external integrated circuit; the second conductive contact **130** may be coupled to the fourth conductive contacts **1401** to constitute a clock signal link for transmission of clock signals; and the second conductive contact **130** may be coupled to the fourth conductive contacts **1401** to constitute a data transmission link for transmission of data during reading and writing.

[0063] For the electronic device **11** including the package structure **10** and the first substrate **140**, the implementations of the present disclosure will be described with a power supply circuit or a power distribution network being taken as an example. The power supply circuit may be provided for voltage supply of the package structure **10** and grounding. In some implementations, the implementations of the present disclosure provide an electronic device **11**. The structural diagram of the electronic device **11** may be illustrated in FIG. **4** and the circuit diagram of the electronic device **11** may be illustrated in FIG. **5**. The electronic device **11** may include: a power supply structure **170**, which provides a node A and supplies voltages through the node A; a first circuit **171** having its one end coupled to the node A and the other end grounded; a package structure **10** including a second circuit **172** and a die circuit **174** that are connected in parallel between the node A and a grounding node,

wherein the second circuit **172** and the first circuit **171** may be equivalent to a parallel resistor-inductor-capacitor circuit (a parallel RLC circuit).

[0064] For easy explanation, some portions of the circuits in FIG. **5** may be designated. The first portion **12** is located at a first substrate **140** (a printed circuit board), providing a power supply structure **170**. The second portion **13** is located at the first substrate **140**, providing a first circuit **171**. The third portion **14** is located at a second substrate **110** (a packaging substrate) of the package structure **10**, providing a second circuit **172**. The fourth portion **15** is located at the semiconductor device **120** in the package structure **10**, providing a die circuit **174**. The node A is the output node A of the power supply structure **170**. The first circuit **171** and the second circuit **172** are connected with the node A directly or via a resistor, a capacitor or an inductor.

[0065] With reference to FIG. **5**, the power supply structure **170** may include a voltage generating circuit or a voltage regulating circuit, which modulates an AC source or a DC source into a voltage needed by the package structure **10** and supplies the voltage to the package structure **10**, wherein the voltage is output through the node A. The first circuit **171** may include a series resistor-inductor-capacitor circuit (a series RLC circuit). The first circuit **171** may include a series inductor-capacitor circuit (a series LC circuit). A plurality of the first circuit **171** may be connected in parallel between the node A of the second portion **13** and the grounding node. The second circuit **172** may be located on and/or in the second substrate **110**, and may include a series RLC circuit. Illustratively, the first circuit **171** and the second circuit **172** may be applied to select a signal of a particular frequency and inhibit signals of other frequencies by adapting values of the resistors, inductors and capacitors.

[0066] The internal circuit of the semiconductor device **120** in the package structure **10** may be illustrated as the die circuit **174** also referred to as a main IC and the semiconductor device **120** may include a plurality of the die circuit **174**. For package structures **10** using different package protocols, voltages needed by the die circuit **174** may be different. With the eMMC protocol being taken as an example, the semiconductor device **120** in the eMMC product may include a memory controller and a memory device. The memory controller is coupled to and controls the memory device and the memory device may include an NAND flash. The power supply voltages for the eMMC product may include an IO voltage VCCQ and an NAND CORE voltage VCC. The VCCQ may supply power to the memory controller and the MMC IO interface between the memory controller and a host. The VCC may supply power to the NAND flash and the NAND IO interface between the memory controller and the NAND flash. The VCCQ and VCC supply power to the internal semiconductor device of the package structure **10** through the coupling between the package structure **10** and the second substrate **110** and other voltages for the internal devices of the NAND flash may be generated through modulation by an internal voltage generator. The VCCQ may have a voltage range of 1.1V~3.6V and the VCC may have a voltage range of 1.7V~3.6V. The VCC voltage is higher than the VCCQ voltage. The clock frequency of the eMMC product may be in the range of 0~200 MHz. The node A in FIG. **5** only provides one voltage for the die circuit **174**, for example, the VCCQ or VCC. The VCCQ and VCC are the voltages obtained from the supply voltage of the node A through voltage depressurization,

filtering and denoising rather than the original voltage output from the node A. Different voltages may be provided by different voltage nodes.

[0067] In some implementations, the circuits in FIG. 5 excluding the die circuit 174, e.g., the circuit of the power supply structure 170, the first circuit 171 and the second circuit 172 may be equivalent to a parallel RLC circuit, which can select a signal of a particular frequency and inhibit signals of other frequencies by adjusting values of the resistors, inductors and capacitors to improve the stability of power supply of the die circuit 174. The schematic diagram of the parallel RLC circuit may be illustrated in FIG. 6. The (overall) resistance of the parallel RLC circuit may vary with frequency. When the resonant frequency of the inductors and capacitors matches the frequency of an input signal, the circuit resistance is maximized and at this time parallel resonance occurs. With reference to FIG. 7, the correspondence relationship between resistance Z and frequency is illustrated, and the frequency corresponding to occurrence of the maximum resistance or the peak value of resistance is the parallel resonant frequency f_r . In the RLC parallel circuit, the quality factor Q of the circuit is related to values of resistance, inductance and capacitance, e.g., the quality factor $Q=1/R*(L/C)^{1/2}$. In a power supply or command signal circuit, the higher the value of Q is, the steeper the characteristic curve is in the pass band and the easier it is for the ringing phenomenon to occur. As a result, the signals that pass through the circuit are liable to distortion. Moreover, the resistance of the circuit reaches its peak value in the vicinity of the resonant frequency, which causes drop of the output current at the same frequency. However, the power supply circuit needs stable transmission of voltage rather than a relatively significant resonance phenomenon. The Q value may be reduced by connecting another resistor in series to the resistance end of the parallel RLC circuit or increasing the resistance value to reduce oscillation of the power supply circuit and reduce the circuit resistance.

[0068] According to some aspects of implementations of the present disclosure, an electronic device 11 is provided. The structural diagram of the electronic device 11 may be illustrated in FIG. 4 and the circuit diagram of the electronic device 11 may be illustrated in FIG. 8. The electronic device 11 may include: a power supply structure 170, which includes a node A and supplies voltages through the node A; a first circuit 171 having its one end coupled to the node A via a first resistor R1 and the other end grounded; a package structure 10 including a second circuit 172 and a die circuit 174 that are connected in parallel between the node A and a grounding node, wherein the second circuit 172, the first circuit 171 and the first resistor R1 may be equivalent to a parallel resistor-inductor-capacitor circuit.

[0069] The power supply structure 170 may be provided by a first substrate 140 (a printed circuit board) and may include a voltage generating circuit, which modulates an AC source or a DC source into a voltage needed by the package structure 10 and supplies the voltage to the package structure 10 with the voltage being output through the node A. The first circuit 171 is provided by the first substrate 140, may include a series RLC circuit or a series LC circuit and is connected to the node A after being connected with the first resistor R1 in series. The second circuit 172 is provided by the second substrate 110 of the package structure 10, may be located on and/or in the second substrate 110 and may include the series RLC circuit. The first circuit 171 has its

one end connected to the node A via the first resistor R1 and the other end be grounded. In an example, one electrode of a first capacitor C1 in the first circuit may be grounded. The second circuit 172 includes a second resistor R2, a second inductor L2 and a second capacitor C2 connected in series, and the second capacitor C2 has its one electrode grounded. The circuit composed of the first circuit 171 and the first resistor R1 connected in series is connected with the second circuit 172 in parallel, forming a parallel RLC circuit for supplying power to the die circuit 174. The first resistor R1 increases the overall resistance of the first circuit 171, lowers the quality factor Q of the parallel RLC circuit, reduces oscillation of the power supply circuit and reduces the circuit resistance. The first resistor R1 may be disposed flexibly on the printed circuit board to avoid modification to the second circuit 172 and the die circuit 174 in the package structure 10 and reduce damages to the package structure 10.

[0070] In some implementations, a plurality of the first circuit 171 may be connected in parallel between the node A and the grounding node and the first resistor R1 may be connected in series with the one of the plurality of first circuits 171 nearest to the second circuit 172. As shown in FIG. 5, the plurality of first circuits 171 are between the node A and the grounding node and the first circuit 171 is a series RLC circuit. The first resistor R1 may be connected with one series RLC circuit that is nearest to the second circuit 172 and then be connected to the node A. The first resistor R1 may be coupled between the B terminal and the C terminal.

[0071] In some implementations, during a test for an eMMC product, its VCCQ power supply circuit has a resonance point with a relatively large resonance amplitude in the vicinity of 200 MHz, causing relatively large amplitudes of oscillation of IO signal. A resistor of 0.5 Ohm may be added in series to the first circuit 171 nearest to the second circuit 172 in the package structure 10 to reduce the resonance amplitude at 200 MHz and resistance. With reference to FIG. 9, for different resistance values of the first resistor R1, a curve chart of resistance vs. frequency is illustrated. The curve A is the resistance vs. frequency curve when the first resistor R1 is 0, e.g., no first circuit R1 is added. The curve B is the resistance vs. frequency curve when the first circuit R1 is 0.5 Ohm. The curve C is the resistance vs. frequency curve when the first circuit R1 is 5 Ohm. In FIG. 9, when no first resistor R1 is added, the curve A has its peak value of resistance occur at 200 MHz and the peak shape of the variation curve A of resistance is relatively steep and the variation of resistance is relatively large, causing a relatively large amplitude jitter of voltage transmission; when a first resistor R1 of 0.5 Ohm is added, the peak resistance occurs at 200 MHz and is reduced, the peak shape of the variation curve B of resistance is relatively smooth, and the variation of resistance is relatively small, so that the amplitude jitter of voltage transmission is relatively small and more stable voltage transmission is enabled; When the resistance value of the first resistor R1 is increased to 5 Ohm, the low-frequency resistance within the range of 0~200 MHz is elevated with respect to the case of 0.5 Ohm, but is lower than the peak resistance when no first resistor R1 is added, the DC component in a low frequency band is lower than that in the case of 0.5 Ohm and the DC component in a high frequency band is higher than that in the case of 0.5 Ohm. In the implementations of the present disclosure, the resistance value of the first resistor R1 may be set according to the package protocol of the package structure 10 in con-

junction with stimulation and tests to reduce the peak resistance corresponding to the resonant frequency, improve stability of power supply, lower the oscillation amplitude and reduce interference to other circuits to improve stability of power supply.

[0072] In an implementation of the present disclosure, one end of the first circuit **171** is coupled to the node A of the power supply structure **170** via the first resistor **R1**, and the second circuit **172** and the die circuit **174** are connected in parallel between the node A and the grounding node; the node A supplies the voltage to power the package structure **10**, enabling the die circuit **174** in the package structure **10** to give play to the device functions of control, storage, communication and the like. The second circuit **172**, the first circuit **171** and the first resistor **R1** may be equivalent to a parallel resistor-inductor-capacitor circuit (a parallel RLC circuit). The first resistor **R1** is configured to reduce the quality factor of the equivalent parallel RLC circuit, reduce oscillation of the power supply circuit and in turn the interference to the die circuit **174**, reduce the resistance of the die circuit **174** and improve the reliability of power supply for the die circuit **174**.

[0073] In some implementations, the first circuit **171** includes a first capacitor **C1** and a first inductor **L1** connected in series. The first circuit **171** may include a series CL circuit including a first capacitor **C1** and a first inductor **L1** connected in series with one electrode of the first capacitor **C1** grounded. The first circuit **171** may include the series RLC circuit as shown in FIG. 5. The first circuit **171** includes a resistor, a first inductor **L1** and a first capacitor **C1** connected in series with one electrode of the first capacitor **C1** grounded.

[0074] In some implementations, the electronic device **11** includes: a plurality of first circuits **171** connected in parallel, and a first resistor **R1** connected in series with one of the plurality of first circuits **171** nearest to the second circuit **172**. FIG. 8 shows one first circuit **171** and one first resistor **R1** connected with the first circuit **171** in series. FIG. 5 shows a plurality of first circuits **171** connected in parallel between the node A and the grounding node and the first circuit **171** is a series RLC circuit. One series RLC circuit that is nearest to the second circuit **172** is connected in series with the first resistor **R1** first and then connected with the node A. The first resistor **R1** may be coupled between the B terminal and the C terminal.

[0075] In some implementations, the second circuit **172** includes a second resistor **R2**, a second inductor **L2** and a second capacitor **C2** that are connected in series; one end of the second circuit **172** is coupled to the node A and the other end of the second circuit **172** is grounded. FIG. 8 shows one second circuit **172**, while FIG. 5 shows a plurality of second circuits **172** connected in parallel. One electrode of the second capacitor **C2** in the second circuit **172** is grounded.

[0076] In some implementations, with reference to FIG. 5, the power supply structure further includes a third circuit **173** having its one end coupled to the node A and the other end grounded. The third circuit **173** is connected with the first circuit **171** in parallel and includes a third resistor **R3**, a third inductor **L3** and a third capacitor **C3** connected in series. With reference to FIG. 5, the third circuit **173** may be provided for voltage stabilization and denoising. There may be a plurality of third circuits **173** connected in parallel. One electrode of the third capacitor **C3** is grounded.

[0077] In some implementations, the power supply structure **170** further includes a voltage generating circuit having its output terminal coupled to the node A. The voltage generating circuit provides voltages and inputs the voltages to the node A and the voltage generating circuit is equivalent to the power source of the circuit in FIG. 5. In the implementations of the present disclosure, a symbol for power source is configured to identify the voltage generating circuit **175**. The voltage generating circuit steps down and modulates the external large current to provide DC or AC voltages satisfying the package protocol, and output the voltages to the node A via the resistor, inductor and capacitor.

[0078] In some implementations, with reference to FIG. 8, the electronic device **11** further includes a fourth inductor **L4**, through which one end of the second circuit **172** is coupled to the node A.

[0079] In some implementations, with reference to FIG. 8, the package structure **10** further includes a fifth inductor **L5**, through which the die circuit **174** is coupled to the node A. The inductors are configured for filtering, and eliminating or reducing interference caused by noises of other circuits or for blocking alternating currents, improving reliability of transmission for power supply.

[0080] In some implementations, the first resistor **R1** has a resistance value in the range of 0.5 Ohm~5 Ohm, and the operating frequency of the die circuit **174** is in the range of 0~300 MHz. The operating frequency of the die circuit **174** may be set according to the related package protocol, for example, the operating frequency of an eMMC product may be in the range of 0~200 MHz. The first resistor **R1** may be adapted according to its operating frequency range to make the resonant frequency, at which the peak value of resistance occurs, fall within the target range of operating frequency, lowering the peak resistance. For example, FIG. 9 shows an eMMC product, in which the first resistor **R1** may be selected to be 0.5 Ohm so as to reduce the peak resistance and the oscillation amplitude.

[0081] In some implementations, with reference to FIG. 4, the electronic device **11** further includes a first substrate **140** on which the power supply structure **170** is located. The package structure **10** further includes a second substrate **110**, and the second circuit **172** is located on and/or in the second substrate **110** and the die circuit **174** is located on the second substrate **110**. The surface of the first substrate **140** on the side having the first circuit **171** disposed thereon is fixed to the surface of the second substrate **110** on the side away from the die circuit **174**.

[0082] In some implementations, with reference to FIG. 4, the package structure **10** further includes a semiconductor device **120** that includes the die circuit **174** and is located on the second substrate **110**.

[0083] The semiconductor device **120** may include a plurality of dies. One of the dies may correspond to one die circuit **174** including, for example, a memory controller and a memory device. The memory controller and the memory device may respectively correspond to one die circuit **174**. The second circuit **172** is provided by the second substrate **110** and may include a wiring layer on the upper surface of the second substrate **110**, conductive pathways penetrating through the second substrate **110** and the wiring layer on the lower surface of the second substrate **110**.

[0084] According to some aspects of an implementation of the present disclosure, a power supply circuit is provided, the power supply circuit including: a node A, through which

the package structure **10** is supplied with power; and a first circuit **171** having its one end coupled to the node A via a first resistor R1 and the other end grounded, wherein the package structure **10** includes a second circuit **172** and a die circuit **174** that are connected in parallel between the node A and a grounding node, and the second circuit **172**, the first circuit **171** and the first resistor R1 may be equivalent to a parallel resistor-inductor-capacitor circuit. The power supply circuit in the implementation of the present disclosure is different from the power supply structure **170** described above and with reference to FIG. 5 may include circuits for supplying power to the die circuit **174** including circuits in the power supply structure **170**, e.g., the circuits including the first circuit **171**, the second circuit **172**, the third circuit **173**, the voltage generating circuit **175**, and other devices such as resistors, inductors, capacitors, transistors, and may include other circuits on the first portion **12**, the second portion **13** and the third portion **14** in the circuits in FIG. 5.

[0085] In some implementations, the first circuit **171** includes a first capacitor C1 and a first inductor L1 connected in series.

[0086] In some implementations, the power supply circuit includes a plurality of first circuits **171** connected in parallel, and a first resistor R1 is connected in series with one of the plurality of first circuits **171** nearest to the second circuit **172**.

[0087] In some implementations, the second circuit **172** includes a second resistor R2, a second inductor L2 and a second capacitor C2 that are connected in series; one end of the second circuit **172** is coupled to the node A and the other end of the second circuit **172** is grounded.

[0088] In some implementations, the power supply circuit further includes a third circuit **173** having its one end coupled to the node A and the other end grounded. The third circuit **173** is connected with the first circuit **171** in parallel and includes a third resistor R3, a third inductor L3 and a third capacitor C3 connected in series.

[0089] In some implementations, the power supply circuit further includes a voltage generating circuit, whose an output terminal is coupled to the node A.

[0090] In some implementations, the power supply circuit further includes a fourth inductor L4, through which one end of the second circuit **172** is coupled to the node A.

[0091] In some implementations, the package structure **10** further includes a fifth inductor L5, through which the die circuit **174** is coupled to the node A.

[0092] In some implementations, the first resistor R1 has a resistance value in the range of 0.5 Ohm~5 Ohm, and the operating frequency of the die circuit **174** is in the range of 0~300 MHz.

[0093] According to some aspects of implementations of the present disclosure, an electronic system is provided by the implementation of the present disclosure, the electronic system including the electronic device **11** or the package system **11** as illustrated in FIG. 4. The electronic device may include one or more package structures, each of which may include at least one of a memory device **104** or a memory controller **106**.

[0094] FIG. 10 provides a memory system **102** including a package structure **10**. The semiconductor device **120** includes at least one of a memory device **104** or a memory controller **106** that is coupled to the memory device **104** and is configured to control the memory device **104**.

[0095] In some implementations, the memory controller **106** and the memory device **104** may be packaged into two package structures **10** respectively, which are integrated onto a printed circuit board to constitute a package system **11**. The printed circuit board may further include other electronic elements. The package system **11** acts as the memory system **102**. The memory system **102** in this implementation may further include a memory card or an SSD product. In this implementation, the electronic device may be an SSD product and the electronic system may be a system **100** including a host **108**.

[0096] In some other implementations, the memory device **104** and the memory controller **106** may be packaged into one package structure **10** that acts as the memory system **102**. The memory system **102** in this implementation may include a universal flash storage (UFS) package or an eMMC package product. In this implementation, the electronic device **11** may be an electronic product, in which a UFS or an EMMC product is applied and may be a system **100** including, but not limited to, a mobile phone etc. Alternatively, the electronic device **11** may be other memory products and the electronic system may be a data center, a cloud storage server, a vehicle, an artificial intelligence terminal product, an intelligent household appliance or the like, in which this type of memory products can be applied.

[0097] The memory device **104** in implementations of the present disclosure includes, but not limited to, a 3D NAND memory and description is given with the 3D NAND memory taken as an example for easy understanding.

[0098] FIG. 10 shows a block diagram of an example system **100** having a memory device in accordance with some aspects of the present disclosure. The system **100** may be a mobile phone, a desktop computer, a laptop computer, a tablet computer, a vehicle computer, a game console, a printer, a locating apparatus, a wearable electronic apparatus, a smart sensor, a virtual reality (VR) apparatus, an augmented reality (AR) apparatus and any other suitable electronic apparatus having a storage therein. As shown in FIG. 10, the system **100** may include a host **108** and a memory system **102** that includes one or more memory devices **104** and a memory controller **106**. The host **108** can be a processor of an electronic device such as a central processing unit (CPU), or a system-on-chip (SoC) such as an application processor (AP). The host **108** may be configured to send data to the memory device **104** or receive data from the memory device **104**.

[0099] According to some implementations, the memory controller **106** is coupled to the memory device **104** and the host **108** and is configured to control the memory device **104**. The memory controller **106** can manage the data stored in the memory device **104** and communicate with the host **108**. In some implementations, the memory controller **106** is designed for operating in a low duty-cycle environment like a secure digital (SD) card, a compact flash (CF) card, a universal serial bus (USB) flash drive, or other medium for use in an electronic device such as a personal computer, a digital camera, a mobile phone, etc. In some implementations, the memory controller **106** is designed for operating in a high duty-cycle environment like an SSD or an embedded multi-media-card (eMMC), used as a data storage for a mobile device such as a smart phone, a tablet computer or a laptop computer, and an enterprise storage array.

[0100] The memory controller **106** can be configured to control operations of the memory device **104**, such as read,

erase, and programming operations. The memory controller **106** can also be configured to manage various functions with respect to the data stored or to be stored in the memory device **104**, including but not limited to bad-block management, garbage collection, logical-to-physical address conversion, wear leveling and the like. In some implementations, the memory controller **106** may be further configured to process error correction codes (ECCs) with respect to the data read from or written to the memory device **104**. Any other suitable functions can be performed by the memory controller **106** as well, for example, formatting the memory device **104**. The memory controller **106** can communicate with an external device (e.g., the host **108**) according to a particular communication protocol. For example, the memory controller **106** may communicate with the external device through at least one of various interface protocols, such as a USB protocol, an MMC protocol, a peripheral component interconnection (PCI) protocol, a PCI-express (PCI-E) protocol, an advanced technology attachment (ATA) protocol, a serial-ATA protocol, a parallel-ATA protocol, a small computer small interface (SCSI) protocol, an enhanced small disk interface (ESDI) protocol, an integrated drive electronics (IDE) protocol, a Firewire protocol, etc. The voltage VCCQ provided by the power supply circuit in implementations of the present disclosure may supply power to the memory controller **106**. The voltage VCCQ may supply power to a communication interface executing the above-described interface protocol between the host **108** and the memory controller **106**.

[0101] The memory controller **106** and one or more memory devices **104** can be integrated into various types of storage apparatuses, for example, be included in the same package, such as a universal Flash storage (UFS) package or an eMMC package. That is, the memory system **102** can be implemented and packaged into different types of end electronic products. In one example as shown in FIG. 11A, the memory controller **106** and a single memory device **104** can be integrated into a memory card **202**. The memory card **202** may include a PC card (PCMCIA, personal computer memory card international association), a CF card, a smart media (SM) card, a memory stick, a multimedia card (MMC, RS-MMC, MMCmicro), an SD card (SD, miniSD, microSD, SDHC), a UFS, etc. The memory card **202** may further include a memory card connector **204** coupling the memory card **202** with a host, e.g., the host **108** in FIG. 10. In another example shown in FIG. 11B, the memory controller **106** and a plurality of memory devices **104** may be integrated into an SSD **206**. The SSD **206** may also include an SSD connector **208** coupling the SSD **206** with a host (e.g., the host **108** in FIG. 10). In some implementations, at least one of the storage capacity or the operation speed of the SSD **206** are greater than those of the memory card **202**.

[0102] FIG. 12 shows a schematic circuit diagram of an example memory device **300** including a peripheral circuit in accordance with some aspects of the disclosure. The memory device **300** may be an example of the memory device **104** in FIG. 10. The memory device **300** may include a memory cell array **301** and the peripheral circuit **302** coupled to the memory cell array **301**. When description is given with a 3D NAND memory cell array taken as an example of the memory cell array **301**, memory cells **306** are provided in the form of an array of NAND memory strings **308** each extending vertically above a substrate (not shown). In some implementations, each NAND memory string **308**

includes a plurality of memory cells **306** coupled in series and stacked vertically. Each memory cell **306** can retain a continuous analog value, for example, a voltage or charges, depending on the number of electrons trapped in the region of the memory cell **306**. Each memory cell **306** may be a memory cell of a floating-gate type that includes a floating-gate transistor, or a memory cell of a charge trapping type that includes a charge trapping transistor.

[0103] In some implementations, each memory cell **306** may be a single-level cell (SLC) that has two possible memory states and thus can store one bit of data. For example, the first memory state “0” may correspond to a first voltage range, and the second memory state “1” may correspond to a second voltage range. In some implementations, each memory cell **306** is a multi-level cell (MLC) that is capable of storing more than single bit of data in more than four memory states. For example, the MLC may store two bits per cell, three bits per cell (also known as a triple-level cell (TLC)), or four bits per cell (also known as a quad-level cell (QLC)). Each MLC may be programmed to assume a range of possible nominal storage values. In an example, if each MLC stores two bits of data, the MLC may be programmed to write one of three possible nominal storage values into the cell, while the fourth nominal storage value other than the three nominal storage values may be configured to represent an erased state.

[0104] As shown in FIG. 12, each NAND memory string **308** may include a bottom select gate (BSG) **310** at its source end and a top select gate (TSG) **312** at its drain end. The BSG **310** and the TSG **312** may be configured to activate a selected NAND memory string **308** during a read operation and a programming operation. In some implementations, sources of the NAND memory strings **308** in the same memory block **304** are coupled together through the same source line (SL) **314** (e.g., a common SL). For example, in accordance with some implementation, all the NAND memory strings **308** in the same memory block **304** have an array common source (ACS). According to some implementations, the TSG **312** of each NAND memory string **308** is coupled to a corresponding bit line (BL) **316** and data can be read from or written to the bit line **316** through an output bus (not shown). In some implementations, each NAND memory string **308** is configured to be selected or deselected by applying a select voltage (e.g., a voltage higher than the threshold voltage of the transistor having the TSG **312**) or a deselect voltage (e.g., 0V) to the corresponding TSG **312** through one or more TSG lines **313** and/or applying the select voltage (e.g., a voltage higher than the threshold voltage of the transistor having the BSG **310**) or the deselect voltage (e.g., 0V) to the corresponding BSG **310** through one or more BSG lines **315**.

[0105] As shown in FIG. 12, the NAND memory strings **308** can be organized into a plurality of memory blocks **304**, each of which may have a common source line **314** (e.g., coupled to the ground). In some implementations, each memory block **304** is a basic data unit for an erase operation. That is, all the memory cells **306** in the same memory block **304** can be erased simultaneously. In order to erase the memory cells **306** in a selected memory block **304a**, an erase voltage (Vers), for example, a high positive voltage (e.g., 20V or higher) is bias coupled to the source lines **314** of the selected memory block **304a** and the unselected memory blocks **304b** in the same plane as the selected memory block **304a**. It is understood that, in some examples, an erase

operation may be performed at a half-memory-block level, a quarter-memory-block level, or a level having any suitable number of memory blocks or any suitable fraction of memory block. Memory cells **306** of adjacent NAND memory strings **308** can be coupled through the word line **318** that selects which row of memory cells **306** is affected by the read and programing operations.

[0106] FIG. **13** shows a cross-sectional diagram of an example memory cell array **301** including the NAND memory string **308** in accordance with some aspects of the present disclosure. As shown in FIG. **13**, the NAND memory string **308** may include a stack structure **410** including a plurality of gate layers **411** and a plurality of insulating layers **412** stacked alternately, and the memory string **308** penetrating vertically through the gate layers **411** and the insulating layers **412**. The gate layers **411** and the insulating layers **412** may be stacked alternately and two adjacent gate layers **411** are isolated by one insulating layer **412**. The number of memory cells included in the memory cell array **301** may be determined by the number of pairs of the gate layers **411** and the insulating layers **412** in the stack structure **410**.

[0107] The material of the gate layers **411** may include a conductive material. The conductive material includes, but not limited to, tungsten (W), cobalt (Co), copper (Cu), aluminum (Al), polysilicon, doped silicon, silicide or any combination thereof. In some implementations, each gate layer **411** includes a metal layer, for example, a tungsten layer. In some implementations, each gate layer **411** includes a doped polysilicon layer. Each gate layer **411** may include a control gate surrounding a memory cell. The gate layer **411** on the top of the stack structure **410** may extend laterally as an upper select gate line, and the gate layer **411** at the bottom of the stack structure **410** may extend laterally as a lower select gate line. The gate layers **411** that extend laterally between the upper select gate line and the lower select gate line may be used as word line layers.

[0108] In some implementations, the stack structure **410** may be disposed on a substrate **401**. The substrate **401** may include silicon (e.g., single crystal silicon), silicon germanium (SiGe), gallium arsenide (GaAs), germanium (Ge), silicon on insulator (SOI), germanium on insulator (GOI) or any other suitable material.

[0109] In some implementations, each NAND memory string **308** includes a channel structure extending through the stack structure **410** vertically. In some implementations, the channel structure includes a channel hole filled with one or more semiconductor materials (e.g., as a semiconductor channel) and one or more dielectric materials (e.g., as a memory film). In some implementations, the semiconductor channel includes silicon, for example, polysilicon. In some implementations, the memory film is a composite dielectric layer including a tunneling layer, a storage layer (also referred to as a “charge trapping/storage layer”) and a blocking layer. The channel structure may have a cylindrical shape (e.g., a pillar shape). In accordance with some implementations, the semiconductor channel, the tunneling layer, the storage layer and the blocking layer are arranged radially from the center to the outer surface of the pillar in this order. The tunneling layer may include silicon oxide, silicon oxynitride or any combination thereof. The storage layer may include silicon nitride, silicon oxynitride or any combination thereof. The blocking layer may include silicon oxide, silicon oxynitride, a high dielectric constant (high-k)

dielectric or any combination thereof. In one example, the memory film may include a composite layer of silicon oxide/silicon oxynitride/silicon oxide (ONO).

[0110] With reference to FIG. **12** again, the peripheral circuit **302** may be coupled to the memory cell array **301** through the bit line **316**, the word line **318**, the source line **314**, the BSG line **315** and the TSG line **313**. The peripheral circuit **302** may include any suitable analog, digital, and mixed-signal circuits and thus facilitating operations of the memory cell array **301** by applying at least one of the voltage signal or current signal to and sensing at least one of the voltage signal or current signal from each target memory cell **306** through the bit line **316**, the word line **318**, the source line **314**, the BSG line **315** and the TSG line **313**. The peripheral circuits **302** may include various types of peripheral circuits formed using the metal-oxide-semiconductor (MOS) technology. For example, FIG. **14** illustrates some example peripheral circuits, and the peripheral circuits **302** include a page buffer/sense amplifier **504**, a column decoder/bit line driver **506**, a row decoder/word line driver **508**, a voltage generator **510**, a control logic **512**, a register **514**, an interface **516**, and a data bus **518**. It should be understood that, in some examples, additional peripheral circuits not shown in FIG. **14** may be further included. The voltage VCCQ provided by the power supply circuit in the implementations of the present disclosure may supply power to devices in the memory device **300** such as the control logic **512** and the voltage generator **510** and also to the interface **516**.

[0111] The page buffer/sense amplifier **504** may be configured to read and programing (writing) data from/to the memory cell array **301** according to a control signal from the control logic **512**. In one example, the page buffer/sense amplifier **504** may store programming data (writing data) to be programmed into the memory cell array **301**. In another example, the page buffer/sense amplifier **504** may perform verify operations for programming to ensure that the data have been properly programmed into the memory cell **306** coupled to the selected word line **318**. In still another example, the page buffer/sense amplifier **504** may also sense a low power signal from the bit line **316** that represent data bits stored in the memory cells **306** and amplify the small voltage swings to a recognizable logic level in a read operation. The column decoder/bit line driver **506** can be configured to be controlled by the control logic **512** and select one or more NAND memory strings **308** by applying bit line voltage generated from the voltage generator **510**.

[0112] The row decoder/word line driver **508** can be configured to be controlled by the control logic **512** and select/deselect the memory block **304** of the memory cell array **301** and select/deselect the word line **318** of the memory block **304**. The row decoder/word line driver **508** can be further configured to drive the word line **318** using the word line voltage generated from the voltage generator **510**. In some implementations, the row decoder/word line driver **508** can also select/deselect and drive the BSG lines **315** and the TSG lines **313**. As described below in detail, the row decoder/word line driver **508** is configured to perform the programing operation on the memory cells **306** coupled to one or more selected word lines **318**. The voltage generator **510** can be configured to be controlled by the control logic **512** and generate the word line voltage (e.g., a read voltage, a program voltage, a pass voltage, a local boost

voltage, a verification voltage, etc.), the bit line voltage, and the source line voltage to be supplied to memory cell array 301.

[0113] In some implementations of the present disclosure, the programming operation may include a plurality of stages, and illustratively may include stages of channel pre-charging, channel boosting, programming pulsing and restoring. At the stage of channel pre-charging, the voltage generator may generate the voltage needed by the next stage such as voltage to be applied on the gates and channel boosting voltage; at the stage of channel boosting, channel boosting voltage may be applied on the selected word line; at the stage of programming pulsing, the target voltage for each time of programming may be applied on the selected word line. At the stage of restoring, the voltages on the unselected word lines and the selected word lines may all be depressed to the lower corresponding voltages such as Vcc and Vdd. At the stage of restoring, the purpose of depressurization to the corresponding voltages may be achieved by one or more steps of voltage decreasing. For example, depressurization to intermediate voltages may be performed at first, and the intermediate voltages may be retained for a period of time and then be depressed to the corresponding voltages.

[0114] The control logic 512 may be coupled to each peripheral circuit described above and configured to control operations of each peripheral circuit. The register 514 may be coupled to the control logic 512 and include a status register, a command register and an address register for storing status information, command operation codes (OP codes) and command addresses for controlling operations of each peripheral circuit. The interface 516 may be coupled to the control logic 512 and serve as a control buffer to buffer the control command received from the host (not shown) and relay it to the control logic 512, and buffer status information received from the control logic 512 and relay it to the host. The interface 516 may be further coupled to the column decoder/bit line driver 506 through the data bus 518 and serve as a data I/O interface and a data buffer to buffer data and relay it to the memory cell array 301 or relay or buffer data from the memory cell array 301.

[0115] What have been described above are only implementations of the present disclosure. However, the scope of the present disclosure is not limited thereto, and variations or substitutions that easily occur to those skilled in the art in light of the technical contents disclosed by the present disclosure will fall within the protection scope of the present disclosure.

What is claimed is:

1. An electronic device, comprising:
 - a power supply structure comprising a node, through which a voltage is supplied; and a first circuit having its one end coupled to the node via a first resistor and the other end grounded; and
 - a package structure comprising a second circuit and a die circuit that are connected in parallel between the node and a grounding node,
 - wherein the second circuit, the first circuit and the first resistor are equivalent to a parallel resistor-inductor-capacitor circuit.
2. The electronic device of claim 1, wherein the first circuit comprises a first capacitor and a first inductor connected in series.

3. The electronic device of claim 1, comprising:
 - a plurality of first circuits connected in parallel, wherein the first resistor is connected in series with one of the plurality of first circuits nearest to the second circuit.
4. The electronic device of claim 1, wherein the second circuit comprises:
 - a second resistor, a second inductor and a second capacitor connected in series, wherein one end of the second circuit is coupled to the node and the other end of the second circuit is grounded.
5. The electronic device of claim 1, wherein the power supply structure further comprises:
 - a third circuit, wherein one end of the third circuit is coupled to the node and the other end of the third circuit is grounded, and the third circuit is connected with the first circuit in parallel and comprises a third resistor, a third inductor and a third capacitor connected in series.
6. The electronic device of claim 5, wherein the power supply structure further comprises a voltage generating circuit having its output terminal coupled to the node.
7. The electronic device of claim 1, further comprising a fourth inductor, through which one end of the second circuit is coupled to the node.
8. The electronic device of claim 1, wherein the package structure further comprises a fifth inductor, through which the die circuit is coupled to the node.
9. The electrical device of claim 1, wherein the first resistor has a resistance value in a range of 0.5 Ohm~5 Ohm, and an operating frequency of the die circuit is in a range of 0~300 MHz.
10. The electronic device of claim 1, further comprising:
 - a first substrate, on which the power supply structure is located,
 - wherein the package structure further comprises a second substrate, the second circuit is located on and/or in the second substrate, and the die circuit is located on the second substrate, and
 - wherein a surface of the first substrate on a side having the first circuit disposed thereon is fixed to a surface of the second substrate on a side away from the die circuit.
11. The electronic device of claim 10, wherein the package structure comprises:
 - a semiconductor device comprising the die circuit, wherein the semiconductor device is located on the second substrate.
12. An electronic system, comprising:
 - an electronic device, comprising:
 - a power supply structure comprising a node, through which a voltage is supplied; and a first circuit having its one end coupled to the node via a first resistor and the other end grounded; and
 - a package structure comprising a second circuit and a die circuit that are connected in parallel between the node and a grounding node,
 - wherein the second circuit, the first circuit and the first resistor are equivalent to a parallel resistor-inductor-capacitor circuit,
 - wherein the package structure comprises at least one of a memory device or a memory controller that is coupled to the memory device and is configured to control the memory device.
13. A power supply circuit, comprising:
 - a node, through which a package structure is supplied with power; and

a first circuit having its one end coupled to the node via a first resistor and the other end grounded, wherein the package structure comprises a second circuit and a die circuit that are connected in parallel between the node and a grounding node, and the second circuit, the first circuit and the first resistor are equivalent to a parallel resistor-inductor-capacitor circuit.

14. The power supply circuit of claim **13**, wherein the first circuit comprises a first capacitor and a first inductor connected in series.

15. The power supply circuit of claim **13**, comprising: a plurality of first circuits connected in parallel, wherein the first resistor is connected in series with one of the plurality of first circuits nearest to the second circuit.

16. The power supply circuit of claim **13**, wherein the second circuit comprises:

a second resistor, a second inductor and a second capacitor connected in series, wherein one end of the second

circuit is coupled to the node and the other end of the second circuit is grounded.

17. The power supply circuit of claim **13**, comprising: a third circuit, wherein one end of the third circuit is coupled to the node and the other end of the third circuit is grounded, and the third circuit is connected with the first circuit in parallel and comprises a third resistor, a third inductor and a third capacitor connected in series.

18. The power supply circuit of claim **17**, further comprising a voltage generating circuit having its output terminal coupled to the node.

19. The power supply circuit of claim **13**, further comprising a fourth inductor, through which one end of the second circuit is coupled to the node.

20. The power supply circuit of claim **13**, wherein the package structure further comprises a fifth inductor, through which the die circuit is coupled to the node.

* * * * *