

Northwest FM Studio Operation Guide

Peter McMurray

February 26, 2025

Contents

Contents	i
1 Programs	1
2 Studio	3
3 Console	5
4 Jazler	9
5 Media	11
6 OBS	13
7 Phones	15
7.1 Basic Guide	15
7.2 Advanced Guide	16
7.3 Yealink User Guide	17
8 Remote	45
9 Spots	47

1 Programs

TODO: Presentation and content of programs put to air

2 Studio

TODO: Presenter responsibilities in the care and use of studio equipment

3 Console

TODO: Use of console in studio

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a

faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consetetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consetetur at, consetetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

Morbi luctus, wisi viverra faucibus pretium, nibh est placerat odio, nec commodo wisi enim eget quam. Quisque libero justo, consetetur a, feugiat vitae, porttitor eu, libero. Suspendisse sed mauris vitae elit sollicitudin malesuada. Maecenas ultricies eros sit amet ante. Ut venenatis velit. Maecenas sed mi eget dui varius euismod. Phasellus aliquet volutpat odio. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Pellentesque sit amet pede ac sem eleifend consetetur. Nullam elementum, urna vel imperdiet sodales, elit ipsum pharetra ligula, ac pretium ante justo a nulla. Curabitur tristique arcu eu metus. Vestibulum lectus. Proin mauris. Proin eu nunc eu urna hendrerit faucibus. Aliquam auctor, pede consequat laoreet varius, eros tellus scelerisque quam, pellentesque hendrerit ipsum dolor sed augue. Nulla nec lacus.

Suspendisse vitae elit. Aliquam arcu neque, ornare in, ullamcorper quis, commodo eu, libero. Fusce sagittis erat at erat tristique mollis. Maecenas sapien libero, molestie et, lobortis in, sodales eget, dui. Morbi ultrices rutrum

lorem. Nam elementum ullamcorper leo. Morbi dui. Aliquam sagittis. Nunc placerat. Pellentesque tristique sodales est. Maecenas imperdiet lacinia velit. Cras non urna. Morbi eros pede, suscipit ac, varius vel, egestas non, eros. Praesent malesuada, diam id pretium elementum, eros sem dictum tortor, vel consectetur odio sem sed wisi.

4 Jazler

To change the operation mode of Jazler, click on the mode button found on the top line of the screen. This button will display the current mode of jazler (Manual, Auto, Offline)

Auto mode is used for when the studio in automation / unattended mode, such as overnight or when a live presenter is unavailable.

Manual mode is used when a live presenter is present. In this mode, you will be alerted when a scheduled break is due to play, and then must be played manually.

Offline mode is for when a studio is not in use or not on air.

When you are finished with a studio, and that studio is not being used by another presenter or automation, please leave it in "Offline" mode.

TODO: How to use Jazler during your program

5 Media

TODO: Describe differences in audio file formats.

Audio files have been stored in three different formats. The following table will show the main differences between the formats used at the station.

Note the difference between compressed audio and compressed data. With compressed audio, the audio information itself is altered to provide a smaller file size, but it results in a loss of audio quality. In contrast, compressed data means that while the data that makes up the audio is compressed, when the data is converted back into audio by the computer, the quality of the audio is unaffected.


It is therefore recommended to use the .flac file format for final playout audio where possible as it offers the best compromise between file size and audio quality. Audio editing should always be performed using .wav format files.

.mp3 files should only be used if that is how the file was supplied.

6 OBS

TODO: Use of Outside Broadcast System

7 Phones

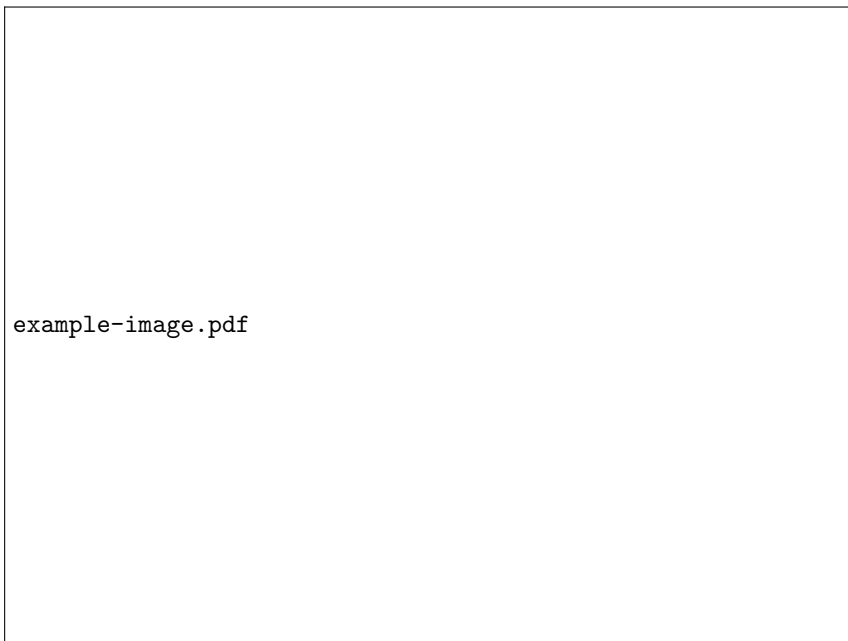

7.1 Basic Guide

Basic operation of the phone is the same as any standard landline phone.

Making a call

1. Pick up handset
2. Dial the required phone number on the keypad

Receiving a call

1. Pick up handset
2. When answering a call, please include the phrase "98-point-9 Northwest FM" as part of your greeting

Putting call to air

1. Establish the call to the handset - do not use speakerphone!
2. Switch phone channel to PGM on the Console
 - a) This takes call from handset and put's to air.
3. To return the call to the handset, simple return phone channel switch to middle position.

Put a call on hold (PARK)

While on a call, simply press any unused park button (shown as green). The call can now be picked up on any handset at on the selected park button.

7.2 Advanced Guide

These are advanced operations, and should be tried several time BEFORE you attempt to used them On Air!

Conference calls together

1. When both calls are parked a. Pick up the first parked call, press the HOLD button (on screen) b. Pick up the second parked call, press the CONF button (on screen) c. Calls are now in conference!
2. When you have 1 call in progress and want to add another a. Press the CONF button (on screen) b. Dial the second caller's number c. Press CONF button (on screen) d. Calls are now in conference

Terminate Conference call, hang up on callers

1. Simply hang up the handset

Terminate Conference call, hold callers

1. Press the SPLIT button (on screen)
2. The screen will show a page for each caller. Use the UP and DOWN arrows to browse the callers ON HOLD. Notice the 1/2 indication at the top-tight of the screen.
3. Press RESUME (on screen) to select a caller. They will now be connected to your handset. Terminate or park the call as required.
4. Repeat from Step 2 for every call ON HOLD.

NOTE: While a call is ON HOLD, it is not available to any other handset. To make the call available at any handset, /Resume/ the call and /PARK/ it.

Transfer

To transfer a call directly to a handset, without using the PARK feature

1. While on a call, press the TRANSFER button (on screen)
2. Dial the extension number the call where the call is be transferred.
 - a. Press TRANSFER button (on screen) to immediately send the call - or -
 - b. Wait for the transfer destination to answer i. Speak to the transfer destination. (usually used to

brief the destination about the call that is being transferred to them) ii. Hang up the handset. The call is now transferred to the destination.

7.3 Yealink User Guide


Note - this section is taken directly from official manual. As such, it contains information not needed by presenters. TODO: Remove irrelevant information, review and reformat.

The SIP-T28P IP phone is designed to be easily used like a regular phone on a public switched telephone network (PSTN). You can place calls, answer calls, transfer a call to someone else, or conduct a conference call.

This chapter provides basic operating instructions for the SIP-T28P IP phone. Topics include:

- Placing Calls
- Answering Calls
- Ending Calls
- Redialing Numbers
- Recent Call In Dialing
- Auto Answer
- Auto Redial
- Call Completion
- Recall
- Call Mute
- Call Hold/Resume
- Do Not Disturb (DND)
- Call Transfer
- Call Waiting
- Conference
- Call Park
- Call Pickup
- Anonymous Call
- Anonymous Call Rejection

If you require additional information or assistance with your new phone, contact your system administrator.



You can place a call in one of three ways using your SIP-T28P IP phone:

- Using the handset
- Using the speakerphone
- Using the headset

You can also dial the number first, and then choose the way you want to speak to the other party.

You can also search and dial a contact from call history, local directory or remote phone book. For more information, refer to Contact Management on page 31 and Call History Management on page 48.

During a call, you can alternate between Speakerphone, Headset, and Handset modes by pressing the Speakerphone key, the HEADSET key, or by picking up the handset.

The call duration of the active call is visible on the LCD screen. In the figure below, the call to the number "1005" has lasted 6 seconds.

To place a call using the handset:

1. Pick up the handset.
2. Enter the desired number using the keypad.
3. Press **, ,** or the Send soft key.

The **#** key is configured as a send key by default. You can also set the ***** key as the send key, or set neither. For more information, refer to Key as Send on page 24.


You can also dial using the SIP URI or IP address. To obtain the IP address of the phone, press the OK key when the phone is idle. The maximum SIP URI or IP address length is 32 characters. For example, SIP URI: 2210@sip.com, IP: 192.168.1.15.

Your phone may not support direct IP dialing. Contact your system administrator for more information.

Note

To place a call using the hands-free speakerphone mode:

Do one of the following:

- With the handset on-hook, press  or the line key to obtain a dial tone.

Enter the desired number using the keypad.

Press **, ,** or the Send soft key.

- With the handset on-hook, enter the desired number using the keypad.

Press , , or the Send soft key.

To place a call using the headset:

Do one of the following:

- With the optional headset connected, press  to activate the headset mode.

Press the line key to obtain a dial tone.

Enter the desired number using the keypad.

Press , , or the Send soft key.

- With the optional headset connected, press  to activate the headset mode.

Enter the desired number using the keypad.

Press , , or the Send soft key.

To permanently activate the headset mode, refer to Headset Prior on page 51.

Note

The SIP-T28P IP phone can handle multiple calls at a time. However, only one active call

(the call that has audio associated with it) can be in progress at any given time. The SIP-T28P IP phone can handle a maximum of 6 calls at one time.

To place multiple calls:

You can have more than one call on your SIP-T28P IP phone. To place a new call during an active call, do one of the following:

- Press the line key. The active call is placed on hold.

Enter the desired number using the keypad.

Press , , or the Send soft key.

- Press  or the Hold soft key to place the original call on hold.

Press the New Call soft key.


Enter the desired number using the keypad.

Press , , or the Send soft key.

You can press or to switch between the calls, and then press the Resume soft key to retrieve the desired call.

If multiple accounts are registered on the phone, you can first press the desired line key in the idle screen or press the Line soft key in the dialing screen, and then you can use the selected account to place a call.

Note



When you are not in another call, you can answer a call in one of three ways:

- Using the handset
- Using the speakerphone
- Using the headset

You can reject incoming calls by pressing the X key, or the Reject soft key. You can also activate Do Not Disturb mode to reject all incoming calls without ringing on your phone. For more information, refer to Do Not Disturb (DND) on page 84.

You can forward incoming calls to someone else by pressing the Forward soft key. For more information, refer to Call Forward on page 88.

Note

Answering When Not in Another Call

Call duration and destination will always appear on the LCD screen for the active call.

To answer a call using the handset:

1. Pick up the handset.

To answer a call using the hands-free speakerphone mode:

Do one of the following:

- Press .
- With the handset on-hook and the headset mode deactivated, press the Answer soft key.
- With the handset on-hook and the headset mode deactivated, press the line key (the line key LED flashes green).

To answer a call using the headset:

Do one of the following:

- Press .
- With the headset mode activated, press the Answer soft key.
- With the headset mode activated, press the line key (the line key LED flashes green).

Answering When in Another Call


If you have an active call, and an incoming call arrives on the phone, do one of the following:

- Press the Answer soft key.

The incoming call is answered and the original call is placed on hold.

-
Press
to access the new call.
Press
or the
Answer
soft key
.

The incoming call is answered and the original call is placed on hold.




To end a call:

Do one of the following:

- If you are using the handset, press the Cancel soft key or hang up the handset.
- If you are using the headset, press the Cancel soft key.
- If you are using the speakerphone, press  or the Cancel soft key.

To end a call placed on hold, you can press the Cancel soft key to end the call directly, or press the Resume soft key to resume the call before ending it.

Note



To redial the last dialed number from your phone:

1. Press  twice.

A call to your last dialed number is attempted.

To redial a previously dialed number from your phone:

1. Press  when the phone is idle.
2. Press or to select the desired entry from the placed calls list, and then press or the Send soft key.

media/image441.png

You can view the placed calls list when the phone is in the pre-dialing screen. To do this, you should enable recent call in dialing in advance.

To enable recent call in dialing via web user interface:

1. Click on Directory->Setting.
2. Select Enabled from the pull-down list of Recent Call In Dialing.
3. Click Confirm to accept the change.

Recent call in dialing is configurable via web user interface only.

Note

To view placed calls list when the phone is in the pre-dialing screen:

1. Pick up the handset, press the speakerphone or press the line key.

The LCD screen displays the placed calls list.

media/image446.png

You can use auto answer to automatically answer an incoming call on a line. Auto answer is configurable on a per-line basis.

To configure auto answer via phone user interface:

1. Press Menu->Settings->Advanced Settings (default password: admin) ->Accounts.
2. Select the desired account and then press the Enter soft key.
3.
field.

Press

or

, or the

Switch

soft key

to select

Enable

d

from the

Auto

Answer

4. Press the Save soft key to accept the change or the Back soft key to cancel.

The

icon
appears
on the LCD screen.

Auto answer is configurable via web user interface at the path
Account->Basic.

Auto answer is only applicable when there is no other call in progress on
the phone.

Note

media/image453.png

You can enable auto redial to automatically redial a phone number
when the called party is busy. You can also configure the number of
auto redial attempts and the time to wait between redial attempts.

To configure auto redial via phone user interface:

1. Press Menu->Features->Auto Redial.
2. Press **OK** or **Enter** or the Switch soft key to select Enabled from the Auto Redial field.
3. Enter the desired time in the Redial Interval field.

The default time interval is 10 seconds.

4. Enter the desired number of redial attempts in the Redial Times field.

The default times are 10.

5. Press the Save soft key to accept the change or the Back soft key to cancel.

Auto redial is configurable via web user interface at the path Features->General Information.

To use auto redial:

When the called party is busy, the following prompt will appear on the LCD screen of the phone:

1. Press the OK soft key to activate auto redial. The following prompt will appear on the LCD screen of the phone:
2. Wait for the designated period of time or press the OK soft key to redial the phone number.

The phone will retry as many times as configured until the called party is idle.

media/image460.png

You can use call completion to notify the caller who failed to reach a desired party when the party becomes available to receive a call.

To configure call completion via phone user interface:

1. Press Menu->Features->Call Completion.

Completion field.

2. Press
or
, or the
Switch
soft key
to select
Enable
d
from the
Call

3. Press the Save soft key to accept the change or the Back soft key to cancel.

Call completion is configurable via web user interface at the path Features->General Information.

To use call completion:

When the called party is busy, the following prompt will appear on the LCD screen of the phone:


1. Press the OK soft key, the phone returns to the idle screen and call completion is activated.

When the called party becomes idle, the following prompt appears on the LCD screen of the phone:

2. Press the OK soft key to redial the number.

Call completion is not available on all servers. For more information, contact your system administrator.

Note

 media/image467.png


You can press a recall key to place a call back to the last incoming call.

To configure a recall key via phone user interface:

1. Press Menu->Features->DSS Keys->Memory Keys (or Line Keys).
2. Select a desired DSS key.
3. Press or , or the Switch soft key to select Key Event from the Type field.

4.
Press
or
, or the
Switch
soft key
to
select
ReCall
from the
Key Type
field.
5. Press the Save soft key to accept the change or the Back soft key to cancel.

Recall key is configurable via web user interface at the path DSSKey.

.png

You can mute the microphone of the active audio device during an active call so that the other party cannot hear you. Call mute applies to all modes (Handset, Headset and Speakerphone).


To mute a call:

1. Press  during an active call.

The LCD screen indicates that the call is now muted.

To un-mute a call:

1. Press  again to un-mute the call.

.png

You can place an active call on hold. Only one active call can be in progress at any time. Other calls can be made and received while placing the original call on hold. When you place a call on hold, your IP PBX may play music to the other party while waiting.

To place a call on hold:

1. Press  or the Hold soft key during a call.

The LCD screen indicates that the call is on hold and the line key LED flashes green.

The phone will beep softly every 30 seconds to remind you that you still have a call on hold.

Note

To resume a held call:

1. Press  or the Resume soft key.

Multiple Calls on Hold:

If multiple calls are placed on hold, do one of the following:

- Press or to switch between the calls, and then press the Resume soft key to retrieve the desired call.
- Press the corresponding line key to retrieve the desired call.

A numbered prompt appears on the LCD screen, for example "2/4", indicating that this is the second call out of four calls.



You can use DND to reject incoming calls automatically on the phone. The prompt message "n New Missed Call(s)" ("n" indicates the number of missed calls) will appear on the LCD screen, and callers will receive a busy message. All calls you receive while DND is enabled are logged to your missed calls list.

The prompt message will display only if Missed Call Log for the line is enabled. Missed Call Log is configurable via web user interface at the path Account->Basic.

Do Not Disturb is local to the phone, and may be overridden by the server settings. For more information, contact your system administrator.

Note

You can enable/disable DND for the phone system, or you can customize DND for each or all accounts. Two DND modes:

- Phone (default): DND is effective for the phone system.
- Custom: DND can be configured for each or all accounts.

You can receive incoming calls from authorized numbers when DND is enabled.

To configure the DND mode via web user interface:

1. Click on Features->Forward & DND.
2. In the DND block, mark the desired radio box in the Mode field.
3. Click Confirm to accept the change.

Note DND mode is configurable via web user interface only.

To activate DND in phone mode:

1. Press the DND soft key when the phone is idle.

The  icon on the LCD screen indicates that DND is enabled.

Incoming calls will be rejected automatically and "n New Missed Call(s)" ("n" indicates the number of missed calls) will appear on the LCD screen.

When DND and busy forward are enabled in phone mode, calls will be sent to the configured destination number. For more information on busy forward, refer to Call Forward on page 88.

Note

To activate DND in custom mode for a specific account:

1. Press the DND soft key when the phone is idle.

The LCD screen displays a list of the accounts on the phone.

Press

or

to select the

desired account

and then press the

Enter

soft key.

Press

,

or the

Switch

soft key

to select

Enable

d

to

activate

DND

from the

2.

3.

DND Enable field.

4. Press the Save soft key to accept the change.

If you activate DND for the default account, the associated line icon will change to , and the  icon will appear on the status bar.

If you activate DND for the non-default account, only the associated line icon will change to .

Incoming calls on this line will be rejected automatically and "n New Missed

Call(s)" ("n" indicates the number of missed calls) will prompt on the LCD screen.

When DND and busy forward are enabled for a specific account, calls from the specific account will be sent to the configured destination number. For more information on busy forward, refer to Call Forward on page 88.


Note

To activate DND in custom mode for all accounts:

1. Press the DND soft key when the phone is idle.

The LCD screen displays a list of the accounts on the phone.

2. Press the All On soft key to activate DND for all accounts.
3. Press the Save soft key to accept the change.



The icon appears on the idle screen and all line icons change to

Incoming calls will be rejected automatically and "n New Missed Call(s)" ("n" indicates the number of missed calls) will prompt on the LCD screen.

To configure the DND authorized numbers via web user interface:

1. Click on Features->Forward & DND.
2. Select Enabled from the pull-down list of DND Emergency.
3. Enter the numbers in the DND Authorized Numbers field.

For multiple numbers, enter a comma between every two numbers.

4. Click Confirm to accept the change.

When DND is enabled on the phone, the phone can still receive incoming calls from the numbers specified in the DND Authorized Numbers field.

DND authorized number is configurable via web user interface only.

When the phone receives a voice mail, the voice mail prompt window will pop up by default, if you want to disable the feature, contact your system administrator for more information.

Note



You can configure your phone to forward incoming calls to another party through static forwarding. You can also forward calls while your phone is ringing; refer to dynamic forwarding.

Three types of static forwarding:

- Always Forward: Incoming calls are immediately forwarded.

- Busy Forward: Incoming calls are immediately forwarded if the phone is busy.
- No Answer Forward: Incoming calls are forwarded if not answered after a period

of time.

You can enable/disable call forward for the phone system, or you can customize call forward for each or all accounts. Two call forward modes:

- Phone (default): Call forward is effective for the phone system.
- Custom: Call forward can be configured for each or all accounts.

To configure the call forward mode via web user interface:

1. Click on Features->Forward & DND.
2. In the Forward block, mark the desired radio box in the Mode field.
3. Click Confirm to accept the change.

Note Call forward mode is configurable via web user interface only.

To enable call forward in phone mode:

1. Press Menu->Features->Call Forward.
2. Press or to select the desired forwarding type, and then press the Enter soft key.
3. Depending on your selection:
 - a.) If you select Always Forward:
 - 1) Press or , or the Switch soft key to select Enabled from the Always Forward field.
 - 2) Enter the destination number you want to forward incoming calls to in the Forward to field.
 - 3) (Optional.) Enter the always forward on code and off code respectively in the On Code and Off Code field.

Always forward on code/ off code is used to activate/deactivate the server-side always forward feature when the user enables/ disables always forward feature on the phone.

- b. If you select Busy Forward:

- 1) Press or , or the Switch soft key to select Enabled from the Busy Forward field.
- 2) Enter the destination number you want to forward incoming calls to when the phone is busy in the Forward to field.
- 3) (Optional.) Enter the busy forward on code and off code respectively in the On Code and Off Code field.

Busy forward on code/ off code is used to activate/deactivate the server-side always forward feature when the user enables/ disables busy forward feature on the phone.

c. If you select No Answer Forward:

- 1) Press or , or the Switch soft key to select Enabled from the No Answer Forward field.
- 2) Enter the destination number you want to forward unanswered incoming calls to in the Forward to field.
- 3) Press or , or the Switch soft key to select the ring time to wait before forwarding from the After Ring Time field.

The default ring time is 12 seconds.

- 4) (Optional.) Enter the no answer forward on code and off code respectively in the On Code and Off Code field.

No answer forward on code/ off code is used to activate/deactivate the

server-side always forward feature when the user enables/ disables no answer forward feature on the phone.

4. Press the Save soft key to accept the change.

The  icon on the full screen indicates that call forward is enabled.

To enable call forward in custom mode:

1. Press Menu->Features->Call Forward.
2. Press or to select the desired account, and then press the Enter soft key.
3. Press or to select the desired forwarding type, and then press the Enter soft key.
4. Depending on your selection:
 - a.) If you select Always Forward, you can enable it for a specific account.
- 1) Press or , or the Switch soft key to select Enabled from the Always Forward field.

- 2) Enter the destination number you want to forward incoming calls to in the Forward to field.
- 3) (Optional.) Enter the always forward on code and off code respectively in the On Code and Off Code field.

Always forward on code/ off code is used to activate/deactivate the server-side always forward feature when the user enables/ disables always forward feature for this account.

You can also enable always forward for all accounts. After always forward was enabled for a specific account, do the following:

- 1) Press  to select the Always Forward field.
- 2) Press the All Lines soft key.

The LCD screen prompts “Copy to all lines?”.

- 3) Press the OK soft key to accept the change or the Cancel soft key to cancel.
- b. If you select Busy Forward, you can enable it for a specific account.
- 1) Press , or the Switch soft key to select Enabled from the Busy Forward field.
 - 2) Enter the destination number you want to forward incoming calls to when the phone is busy in the Forward to field.
 - 3) (Optional.) Enter the busy forward on code and off code respectively in the On Code and Off Code field.

Busy forward on code/ off code is used to activate/deactivate the server-side always forward feature when the user enables/ disables busy forward feature for this account.

You can also enable busy forward for all accounts. After busy forward was enabled for a specific account, do the following:

- 1) Press  to select the Busy Forward field.
- 2) Press the All Lines soft key.

The LCD screen prompts “Copy to all lines?”.

- 3) Press the OK soft key to accept the change or the Cancel soft key to cancel.
- c. If you select No Answer Forward, you can enable it for a specific account.
- 1) Press , or the Switch soft key to select Enabled from the No Answer Forward field.
 - 2) Enter the destination number you want to forward unanswered incoming calls to in the Forward to field.

- 3) Press  , or the Switch soft key to select the ring time to wait before forwarding from the After Ring Time field.

The default ring time is 12 seconds.

- 4) (Optional.) Enter the no answer forward on code and off code respectively in the On Code and Off Code field.

No answer forward on code/ off code is used to activate/deactivate the server-side always forward feature when the user enables/ disables no answer forward feature for this account.



You can also enable no answer forward for all accounts. After no answer forward was enabled for a specific account, do the following:

- 1) Press  to select the No Answer Forward field.
- 2) Press the All Lines soft key.

The LCD screen prompts

“
Copy to all lines?
”
.

- 3) Press the OK soft key to accept the change or the Cancel soft key to cancel.
5. Press the Save soft key to accept the change or the Back soft key to cancel.

  If you activate call forward for the default account, the associated line icon will change to  , and the  icon will appear in the status bar.

  If you activate call forward for the non-default account, only the associated line icon will change to  .

Call forward is configurable via web user interface at the path Features->Forward & DND.

You can also enter the SIP URI or IP address in the Forward to field. For more information on using the SIP URI or IP address, refer to Placing Calls on page 73.

Call forward is local to the phone, and may be overridden by the server settings. Call forward on code or off code may be different between servers. For more information, contact your system administrator.

Note

To disable call forward in phone mode:

Do one of the following:

- Press  when the phone is idle.
- Press Menu->Features->Call Forward.

Press or to select the desired forwarding type, then press the Enter soft key.

Press or , or the Switch soft key to select Disabled to disable call forward.

Press the Save soft key to accept the change.

To disable call forward in custom mode for a specific account:

1. Press Menu->Features->Call Forward or press  when the phone is idle.
2. Press or to select the desired account and then press the Enter soft key.
3. Press or to select the desired forwarding type, then press the Enter soft key.
4. Press , or the Switch soft key to select Disabled to disable call forward.
5. Press the Save soft key to accept the change.

To forward an incoming call to another party:

1. When the phone is ringing, press the Forward soft key.
2. Enter the number you want to forward the incoming call to.
3. Press
,
,
or the
Send
soft key.

The LCD screen prompts a call forward message.

When the phone forwards a call, the forward call prompt window will pop up by default, if you want to disable the feature, contact your system administrator for more information.

Note

You can transfer a call to another party in one of three ways:

- Blind Transfer: Transfer a call directly to another party without consulting.
- Semi-Attended Transfer: Transfer a call when the target phone is ringing.
- Attended Transfer: Transfer a call with prior consulting.

To perform a blind transfer:

1. Press  or the Transfer soft key during a call.
2. Do one of the following:
 - Enter the number or you want to transfer the call to.
3. Press  to complete the transfer.

Then the call is connected to the number to which you are transferring.

To perform a semi-attended transfer:

1. Press  or the Transfer soft key during a call.
2. Do one of the following:
 - Enter the number you want to transfer the call to.
 - Press the Directory soft key, and then select Local Directory. Select the desired group, and search for the contact (Directory should be configured in advance. Refer to Local Directory on page 33 for more information.).
 - Press the Directory soft key, and then select History. Select the desired list and use or to select the entry (Directory should be configured in advance.

Refer to Local Directory on page 33 for more information.).

- Press the Directory soft key, and then select Remote Phone Book. Select the desired group and search for the contact (Directory and remote phone book should be configured in advance. Refer to Local Directory on page 33 and Remote Phone Book on page 46 for more information.)
3. Press or to dial out.
 4. Press or the Transfer soft key to complete the transfer when receiving ringback.

To perform an attended transfer:

1. Press  or the Transfer soft key during a call.
2. Do one of the following:
 - Enter the number you want to transfer the call to.
 - Press the Directory soft key, and then select Local Directory. Select the desired group, and search for the contact (Directory should be configured in advance. Refer to Local Directory on page 33 for more information.).

- Press the Directory soft key, and then select History. Select the desired list and use or to select the entry (Directory should be configured in advance).

Refer to Local Directory on page 33 for more information.).

- Press the Directory soft key, and then select Remote Phone Book. Select the desired group and search for the contact (Directory and remote phone book should be configured in advance. Refer to Local Directory on page 33 and Remote Phone Book on page 46 for more information.)
3. Press the Send soft key, or to dial out.
 4. After the party answers the call, press or the Transfer soft key to complete the transfer.

If you are using a handset, the transfer can be completed by hanging up the handset.

You can cancel the transfer before the call is connected by pressing the Cancel soft key.

media/image523.png

You can enable or disable call waiting on the phone. If call waiting is enabled, you can receive another call while there is already an active call on the phone. Otherwise, another incoming call is automatically rejected by the phone with a busy message when there is an active call on the phone. You can also enable or disable the phone to play a warning tone when receiving another call.


To configure call waiting via phone user interface:

1. Press Menu->Features->Call Waiting.
2. Press or , or the Switch soft key to select Enabled from the Call Waiting field.
3. Press or , or the Switch soft key to select Enabled from the Play Tone field.
4. (Optional.) Enter the call waiting on code and off code respectively in the On Code and Off Code field.

Call waiting on code/ off code is used to activate/deactivate the server-side call waiting feature when the user enables/ disables call waiting feature on the phone.

5. Press the Save soft key to accept the change or the Back soft key to cancel.


Call waiting is configurable via web user interface at the path Features->General Information.



You can create a conference with other two parties using the phone's local conference. You can create a conference between an active call and a call on hold (on the same or another line) by pressing the CONF key or the Conf soft key.

Network conference is not available on all servers. For more information, contact your system administrator.


Note



The SIP-T28P IP phone supports up to 3 parties (including yourself) in a conference call.


This is the default method of conference called Local Conference.

To set up a local conference call:

1. Place a call to the first party.
2. When the first party answers the call, press  or the Conf soft key to place a new call.

The active call is placed on hold.

3. Enter the number of the second party and press , , or the Send soft key.


4. When the second party answers the call, you can consult with him or her before adding to the conference.
5. Press  or the Conf soft key again to join all parties in the conference.

To join two calls in a conference:

1. Place two calls using two different accounts on the phone (for example, place the first call using account 1, and then place the second call using account 2).
2. Press or to select the call for conference and ensure that the call is active (for example, select the call on account 1).

3. Press  or the Conf soft key to join the two calls in the conference on the selected account.

You can press  or the Hold soft key to place the conference on hold. You can press the Split soft key to split the conference call into two individual calls on hold. To drop the conference call, press the Cancel soft key.



You can use network conference on the SIP-T28P IP phone to conduct a conference with multiple participants.

This feature allows you to perform the following:

- Join two calls together into a conference call.
- Invite another party into an active conference call.

To use this feature, contact your system administrator for the network conference URI in advance.

To configure network conference via web user interface:

1. Click on Account.
2. Select the desired account from the pull-down list of Account.
3. Click on Advanced.
4. Select Network Conference from the pull-down list of Conference Type.
5. Enter the conference URI (e.g., conference@example.com) in the Conference URI field.
6. Click Confirm to accept the change.

Network conference is configurable via web user interface only.

Note

To set up a network conference call:

1. Place a call to the first party.
2. Press  or the Conf soft key to place a new call.

The active call is placed on hold.

3. Enter the number of the second party and press , , or the Send soft key.


4. When the second party answers the call, press or the Conf soft key to add the second party to the conference.

5. Press  or the Conf soft key to place a new call.

The conference is placed on hold.

6. Enter the number of the new party and then press , , or the Send soft key.
7. When the new party answers the call, press or the Conf soft key to add the new party to the conference.
8. Repeat steps 5 to 7 until you have added all intended parties.

The procedures to set up a network conference call for specific servers may be different from introduced above. Contact your system administrator for more information.



You can use call park to place a call on hold, and then retrieve the call from another phone in the system (for example, a phone in another office or conference room). You can park an active call by pressing the call park key on the phone. If the call is parked successfully, the response is either a voice prompt confirming that the call was parked, or a visible prompt on the LCD screen.

Call park is not available on all servers. Contact your system administrator for more information.

Note

To configure a call park key via phone user interface:

1. Press Menu->Features->DSS Keys->Memory Keys (or Line Keys).
2. Select the desired DSS key.
3. Press or , or the Switch soft key to select Key Event from the Type field.
4. Press or , or the Switch soft key to select Call Park from the Key Type field.
5. Press or , or the Switch soft key to select the desired account from the Account ID field.
6. Enter the call park code in the Value field.
7. Press the Save soft key to accept the change or the Back soft key to cancel.

Call park key is configurable via web user interface at the path DSSKey.

To use call park:

1. User on phone A places a call to phone B.
2. User on phone A wants to take the call in a conference room for privacy, and so presses the call park key on phone A.
3. User on phone A walks to an available conference room where the phone is designated as phone C. The user dials call park retrieve code to retrieve the parked call.

The system establishes call between phone C and B.

The call park code and call park retrieve code are predefined on the system server. Contact your system administrator for more information.

If the parked call is not retrieved within a period of time assigned by the system, the phone performing call park will receive a call back.

Note

You can use call pickup to answer someone else's incoming call on your phone. The SIP-T28P IP phone supports directed call pickup and group call pickup. Directed call pickup is used for picking up a call that is ringing at a target phone number. Group call pickup is used for picking up a call that is ringing at any phone number in a certain group. The pickup group should be predefined, contact your system administrator for more information.

You can pick up an incoming call by using the DPickup/GPickup soft key. To use call pickup, you need to configure the call pickup code beforehand on a global or per-line basis via web user interface.

Note If there are many incoming calls at the same time, pressing the GPickup soft key on the phone will pick up the call that rings first.

The directed call pickup code and group call pickup code are predefined on the system server. Contact your system administrator for more information.

The call pickup code configured on a per-line basis takes precedence over that configured on a global basis.

To enable the directed call pickup via web user interface:

1. Click on Features->Call Pickup.
2. Select Enabled from the pull-down list of Directed Call Pickup.
3. Click Confirm to accept the change.

To configure the directed call pickup code on a global basis via web user interface:

1. Click on Features->Call Pickup.
2. Enter the directed call pickup code in the Directed Call Pickup Code field.

3. Click Confirm to accept the change.

To configure the directed call pickup code on a per-line basis via web user interface:

1. Click on Account.
2. Select the desired account from the pull-down list of Account.
3. Click on Advanced.
4. Enter the directed call pickup code in the Directed Call Pickup Code field.
5. Click Confirm to accept the change.

To pick up a call directly:

1. Pick up the handset and press the more soft key.

The DPickup soft key appears on the LCD screen.

2. Press the DPickup soft key on your phone when the target phone receives an incoming call.
3. Enter the phone number which is receiving an incoming call.
4. Press the DPickup soft key again.

The call is answered on your phone.

You can also configure a DSS key as a directed pickup key via phone user interface or web user interface. Once configured, you can pick up a call by pressing the directed pickup key directly.

Note If a pickup code is already configured on a global or a per -line basis, you should not configure the pickup code when configuring a DSS key to be pickup key.

To enable group call pickup via web user interface:

1. Click on Features->Call Pickup.
2. Select Enabled from the pull-down list of Group Call Pickup.
3. Click Confirm to accept the change.

To configure the group call pickup code on a global basis via web user interface:

1. Click on Features->Call Pickup.
2. Enter the group call pickup code in the Group Call Pickup Code field.
3. Click Confirm to accept the change.

To configure the group call pickup code on a per-line basis via web user interface:

1. Click on Account.
2. Select the desired account from the pull-down list of Account.
3. Click on Advanced.
4. Enter the group call pickup code in the Group Call Pickup Code field.
5. Click Confirm to accept the change.

To pick up a call in the group:

1. Pick up the handset.

The GPickup soft key appears on the LCD screen.

2. Press the GPickup soft key on your phone when a phone in the group receives an incoming call.

The call is answered on your phone.

You can also configure a DSS key as a group pickup key via phone user interface or web user interface. Once configured, you can pick up a call by pressing the group pickup key directly.

`media/image556.png`

You can use anonymous call to block your identify and phone number from appearing to the called party when you call someone. For example, you want to call to consult some of the services, but don't want to be harassed. Anonymous call is configurable on a per-line basis. You can also configure the phone to send anonymous call on/off code to the server to activate/deactivate anonymous call on the server side.

Anonymous call is not available on all servers. Contact your system administrator for the anonymous call on code and off code.

Note

To configure anonymous call via phone user interface:

1. Press Menu->Features->Anonymous Call.
2.
ID field.

Press
or
,
or the
Switch
soft key
to select the desired line
from the
Account
Press
or
to select
Enable
d
from the
Local
Anonymous
field.
(
Optional.
)
Press or
to select
the desired value
from the
Send Anony Code

3.

4.

field.

5. (Optional.) Enter the anonymous call on code and off code respectively in the On Code and Off Code field.

The phone will send the configured on code or off code depending on your selection when you enable or disable anonymous call feature on the phone.

6. Press the Save soft key to accept the change or the Back soft key to cancel.

Anonymous call is configurable via web user interface at the path Account->Basic.

To place an anonymous call:

1. Using the specific line on the phone to place a call to phone B.
The LCD screen of phone B prompts an incoming call from anonymity.

media/image561.png

You can use anonymous call rejection to reject incoming calls from anonymous callers. Anonymous call rejection automatically rejects incoming calls from callers who deliberately block their identities and numbers from being displayed. Anonymous call rejection is configurable on a per-line basis. You can also configure the phone to send anonymous call rejection on/off code to the server to activate/deactivate anonymous call rejection on the server side.

To configure anonymous call rejection via phone user interface:

1. Press Menu->Features->Anonymous Call.

- 2.

ID field.

Press
or
, or the
Switch
soft key to
select the desired line
from
the
Account
Press
or
to scroll to the
Anon
Reject
field.
Press
or
to select
Enable
d
from
the
Anon
Reject
field.
Press or to scroll to the
Send
r
ejection Code
field.
(
Optional.) Press or
to select
the desired value
from the

Send
r
ejction

3.

4.

5.

6.

Code field.

7. (Optional.) Enter the anonymous call rejection on code and off code respectively in the On Code and Off Code field.

The phone will send the configured on code or off code depending on your selection when you enable or disable local anonymous rejection feature on the phone.

8. Press the Save soft key to accept the change or the Back soft key to cancel.

Anonymous call rejection is configurable via web user interface at the path Account->Basic.

8 Remote

TODO: Creating content remotely (work from home) and preparing it for broadcast from the station

9 Spots

TODO: Scheduling and preparation of spots (carts)

