




## ClearCore Hardware and Wiring Manual

Includes wiring information for CCIO-8 (I/O Expansion Board)  
and CL-ENCODR-DFIN (Encoder Input Adapter Board)

Rev. 1.12.2 October 15, 2024

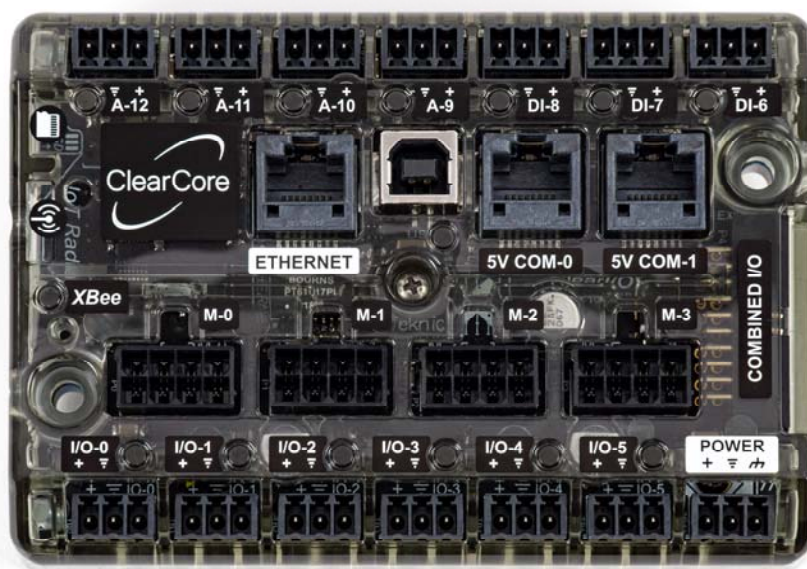

## Table of Contents

<b>Table of Contents .....</b>	<b>2</b>
<b>Introduction .....</b>	<b>4</b>
Welcome .....	4
What's in this Document .....	4
<b>Safety Information.....</b>	<b>5</b>
Precautionary Statement .....	5
General Disclaimer .....	5
<b>Parts Overview .....</b>	<b>6</b>
Parts of a ClearCore .....	6
Parts of a CCIO-8 (I/O Expansion Board).....	7
<b>Powering ClearCore and CCIO-8 .....</b>	<b>8</b>
Recommended Power Supply .....	8
PWR-IO-24VDC.....	8
Wiring DC Power to ClearCore and CCIO-8 .....	9
<b>I/O Wiring .....</b>	<b>10</b>
Introduction .....	10
I/O Overview Table .....	10
Wiring I/O Devices to ClearCore.....	11
I/O-0 through I/O-5 configured as DIGITAL INPUTS .....	12
A-9 through A-12 and DI-6 through DI-8 configured as DIGITAL INPUTS.....	13
A-9 through A-12 configured as ANALOG INPUTS .....	14
I/O-0 through I/O-5 configured as DIGITAL OUTPUTS .....	15
I/O-4 or I/O-5 configured as Variable, Bi-directional Drive (PWM) .....	16
I/O-0 configured as a 4-20mA (or 0-20mA) OUTPUT .....	17
ClearCore Combined I/O Header.....	18
Wiring I/O Devices to CCIO-8.....	19
I/O-0 through I/O-7 configured as DIGITAL INPUTS .....	19
I/O-0 through I/O-7 configured as DIGITAL OUTPUTS .....	19
CCIO-8 Combined I/O Header.....	19
<b>Motor Connectors (M-0, M-1, M-2, M-3) .....</b>	<b>20</b>
How to Wire a ClearPath Motor to ClearCore .....	21
ClearPath Controller Cables .....	21
Wiring a Stepper Motor Drive to ClearCore .....	22

<b>Serial COM Ports (COM-0, COM-1)</b>	<b>23</b>
COM-0, COM-1 with 5V compatible RS-232 transceivers	24
COM-0, COM-1 configured for 5V logic UART devices	25
COM-0, 1 configured for SPI devices	26
<b>Other Ports and Connectors</b>	<b>27</b>
USB Port	27
Ethernet Port	27
XBee Connector	27
JTAG Connector	28
Micro-SD Card Drive	28
<b>CL-ENCODR-DFIN Encoder Input Adapter Board</b>	<b>29</b>
Introduction	29
Connectors and Pinouts	30
Dimensions	31
Specifications	31
<b>Appendix A: Troubleshooting</b>	<b>32</b>
Recovering an Unresponsive ClearCore	32
Status Blink Codes	32
Windows 7 Issues	32
<b>Appendix B: Mechanical Reference</b>	<b>34</b>
ClearCore Mounting and Clearance Dimensions	34
CCIO-8 Mounting and Clearance Dimensions	35
<b>Appendix C: Mating Connectors and Terminals</b>	<b>36</b>
<b>Appendix D: Specifications</b>	<b>37</b>
ClearCore Specifications	37
CCIO-8 Specifications	39
<b>Appendix E: Processor Signal Routing Schematics</b>	<b>40</b>

# Introduction

---

## Welcome

Thank you for purchasing a ClearCore programmable, I/O and motion controller. This document is a hardware reference manual for both the ClearCore controller (Teknic p/n [CLCR-4-13](#)) and the ClearCore I/O expansion board (Teknic p/n [CCIO-8](#)).

For programming information, please see the ClearCore [programming reference](#).

Complete documentation for ClearCore and its accessories can be found on our [Downloads](#) page under the ClearCore heading.

---

## What's in this Document

- Parts of a ClearCore (callout diagram)
- Wiring diagrams for common I/O and motor devices
- Power supply requirements
- Mating hardware information
- Product specifications
- Mechanical dimensions
- Mounting information

## Safety Information

Please read this safety information before using a ClearCore controller.

---

### Precautionary Statement

Always follow appropriate safety precautions when installing and using any automated motion control equipment. Motion control systems should be designed and utilized to prevent personnel from coming into contact with moving parts and electrical contacts that could potentially cause injury or death. Read all cautions, warnings, and notes before attempting to install or operate this device. Follow all applicable codes and standards when using this equipment. Failure to use this equipment as described may impair or neutralize protections built into the product.

---

### General Disclaimer

The User is responsible for determining the suitability of this product for his or her application. The User must ensure that Teknic's products are installed and utilized in accordance with all local, state, federal and private governing bodies and meet all applicable health and safety standards.


Teknic has made all reasonable efforts to accurately present the information in the published documentation and shall not be responsible for any incorrect information which may result from unintentional oversights.

Due to continuous product improvements, the product specifications as stated in the documentation are subject to change at any time and without notice. The User is responsible for consulting a representative of Teknic for detailed information and to determine any changes of information in the published documentation.



Should Teknic's products be used in an application that is safety critical, the User must provide appropriate safety testing of the products, adequate safety devices, guarding, warning notices and machine-specific training to protect the operator and/or bystanders from injury.

## Parts Overview

### Parts of a ClearCore

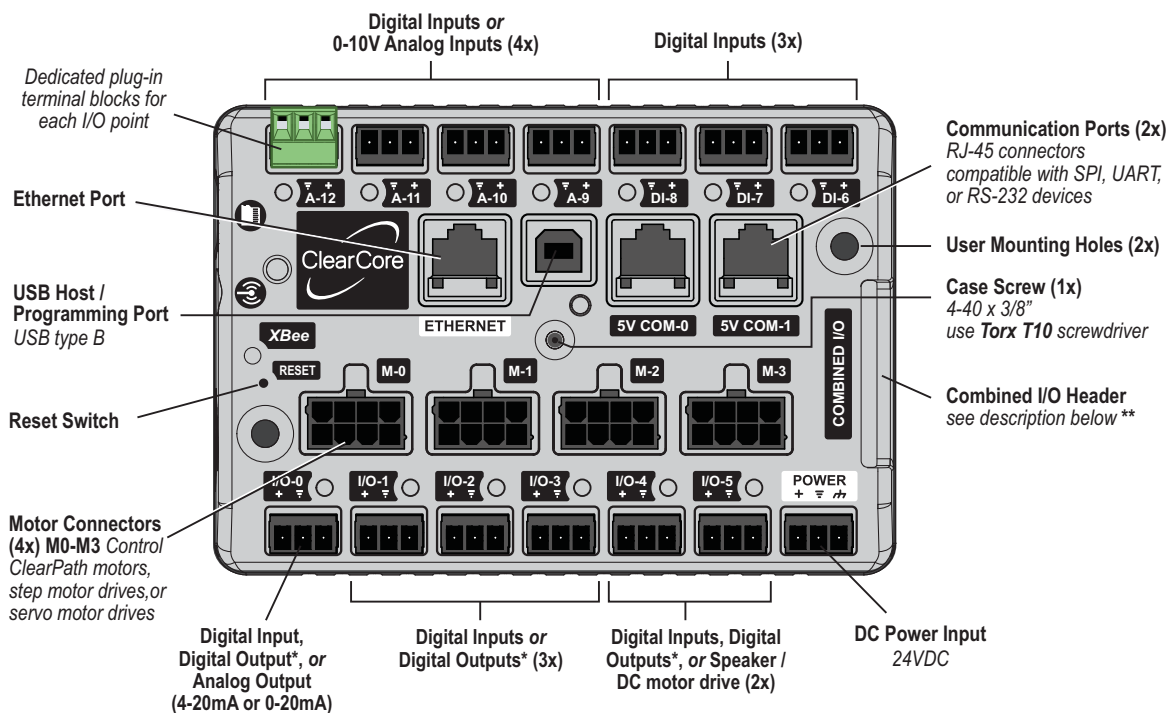

\*All digital outputs (I/O-0 through I/O-5) have built-in clamping circuitry and are capable of driving coils of up to **9-watts max**.

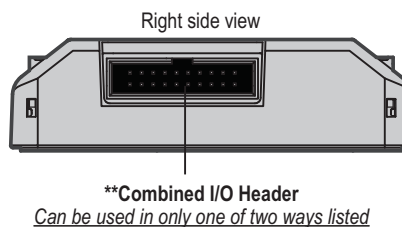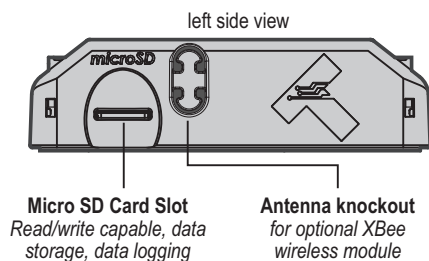


Breaks out all 13 I/O points.  
(Provides an alternative hookup path to the individual 3-pin I/O connectors.)

or

Connect optional Teknic differential encoder input board here (Teknic PN **CL-ENCDR-DFIN**).

ClearCore top and side views

## Parts of a CCIO-8 (I/O Expansion Board)

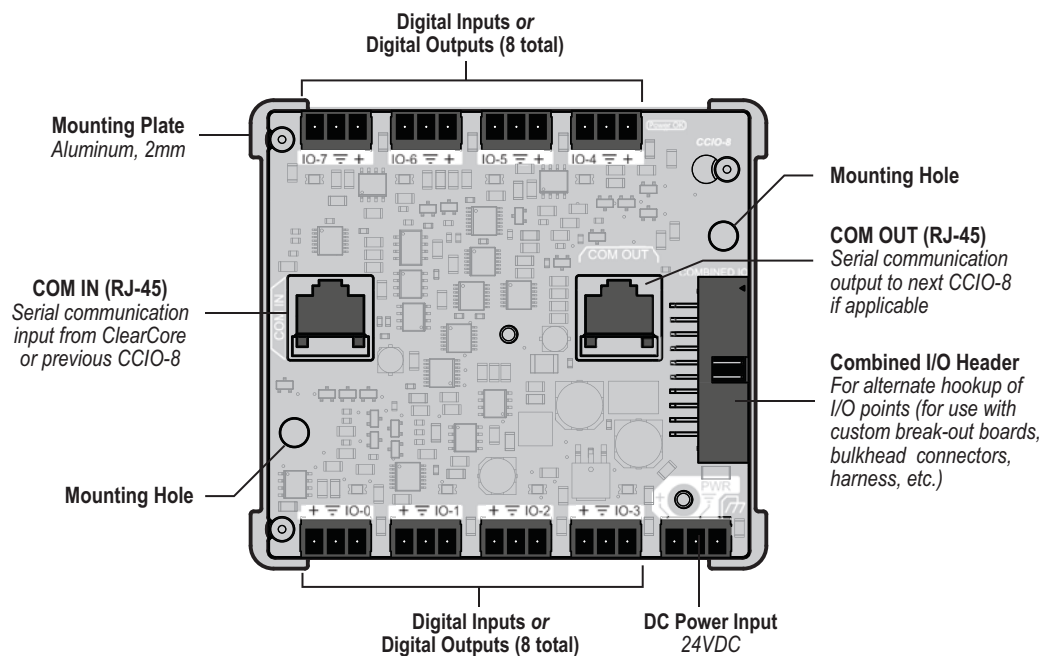

CCIO-8 I/O expansion board

## Powering ClearCore and CCIO-8

ClearCore and CCIO-8 are 24VDC compatible devices. This section includes ClearCore power supply recommendations and wiring instructions.

**Important:** *Do not use your ClearCore power supply to also supply DC bus power to servo or stepper drives attached to ClearCore (this applies to ClearPath motors as well). Always use a separate, dedicated supply, such as the [IPC-5](#), designed to handle the power and regenerated energy requirements of servo or step motor drives.*

### Recommended Power Supply

#### PWR-IO-24VDC

The [PWR-IO-24VDC](#) power supply (Mean Well PN LRS-150-24) is an inexpensive, 24VDC, 6.5A (156W) switching supply capable of powering most ClearCore applications.

[Product Datasheet](#)

[Installation Information](#)



#### Why choose a "higher current" power supply?

A power supply of 6.5A or more is recommended for ClearCore applications to ensure that the ClearCore processor remains powered under adverse operating conditions such as overloads or shorts. Note: *Lower current supplies will work with ClearCore*, but may experience shutdowns or brown outs if ClearCore is overloaded or shorted due to user/application error.



## Wiring DC Power to ClearCore and CCIO-8


See below for instructions on wiring 24VDC power to ClearCore and CCIO-8.

### Tools Required

- Slotted screwdriver with max. 2mm wide blade
- Wire cutter/stripper
- 3-position screw terminal connector, [Molex part # 0395105003](#)

### Procedure

1. Turn off power supply.
2. Strip DC output wires from power supply. Expose approximately **6.5mm (0.25")** of bare wire.
3. Fully insert V+ and V- wires fully into terminal block "+" and ground positions.
4. Tighten terminal screws.
5. Inspect connector for good wire capture. Verify that no wire insulation is captured in the closure, and that no loose wire strands are sticking out of the connector.
6. **Recommended:** Before connecting the terminal block to ClearCore, test for correct voltage polarity between "+" and ground terminals.

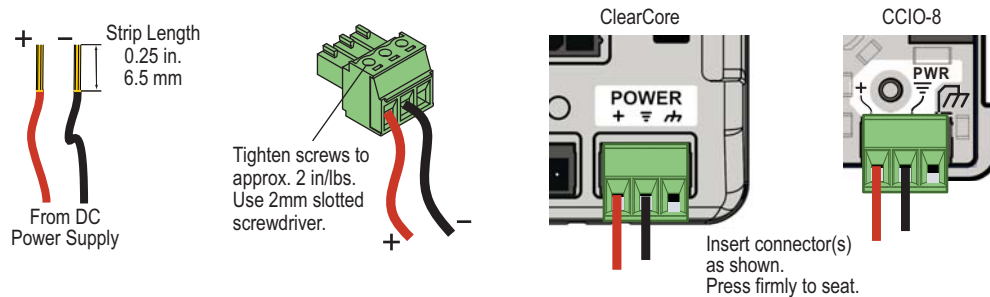

Connecting power to ClearCore and CCIO-8

### Chassis Connection



Mount ClearCore and CCIO-8 to a machine frame or chassis continuous with Protective Earth. Alternately, connect the chassis terminal on the 3-position power connector to machine frame using conductive hardware.

## I/O Wiring

### Introduction

This section discusses the function and wiring of ClearCore and CCIO-8 user-configurable I/O points.

#### ClearCore I/O at a Glance

- (13) software configurable I/O points
- Up to (13) digital inputs
- Up to (4) analog inputs
- Up to (6) digital outputs (with PWM)
- Up to (1) 4-20mA (or 0-20mA) output
- Separate ground and power for all I/O points (grounds not isolated)
- A dedicated status LED for every I/O point
- Add up to 64 more digital in/out points with Teknic's CCIO-8 (I/O expansion modules)

### I/O Overview Table

The table below lists all ClearCore and CCIO-8 I/O connectors and their supported I/O types. Refer to the ClearCore programming reference for instructions on how to configure ClearCore and CCIO-8 I/O connectors.

Label	Digital Input	Digital Output <sup>1</sup>	0-10V Analog Input	4-20 mA Output <sup>2</sup>	Servos or Steppers	Speaker Tones	DC Motor Drive
I/O-0	yes	yes		yes			
I/O-1	yes	yes					
I/O-2	yes	yes					
I/O-3	yes	yes					
I/O-4	yes	yes				yes	yes
I/O-5	yes	yes				yes	yes
DI-6	yes						
DI-7	yes						
DI-8	yes						
A-9	yes		yes				
A-10	yes		yes				
A-11	yes		yes				
A-12	yes		yes				
M-0					yes <sup>3</sup>		
M-1					yes <sup>3</sup>		
M-2					yes <sup>3</sup>		
M-3					yes <sup>3</sup>		
CCIO-8 <sup>4</sup>	yes	yes					

Note 1: All digital outputs are PWM capable (except for those on the CCIO-8 expansion board).

Note 2: This output can also provide 0-20mA, which is less commonly used.


Note 3: Each motor connector has 3 digital outputs (step, dir., enable) and 1 digital input.

Note 4: There are 8 of these I/O points on the CCIO-8 expansion module.

ClearCore I/O overview table


## Wiring I/O Devices to ClearCore

This section explains how to wire common I/O devices to a ClearCore controller. Each subsection includes a diagram of the ClearCore internal circuitry and several example hookup diagrams.

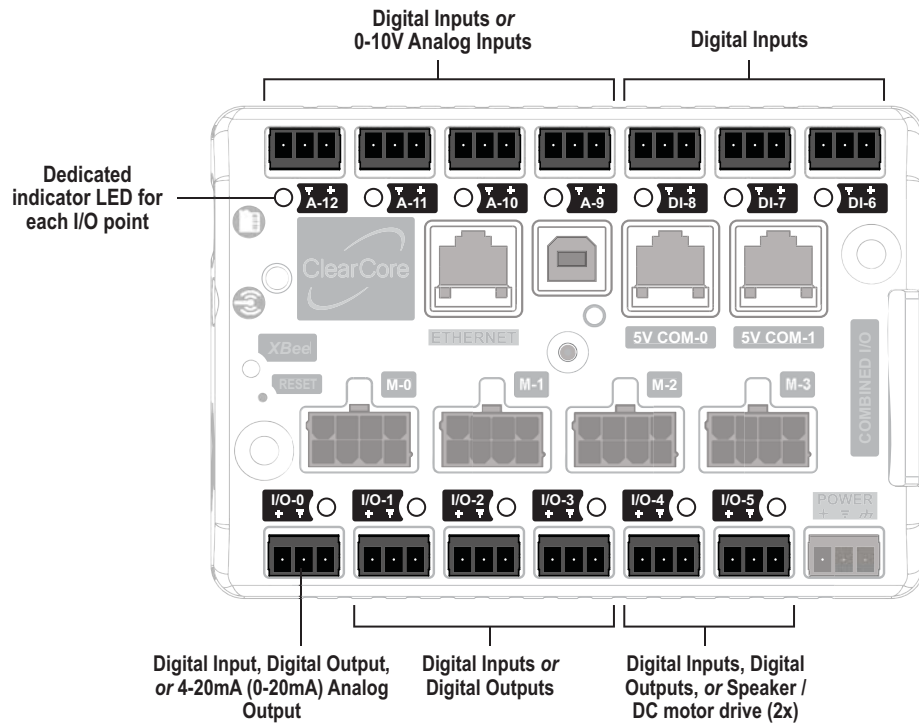

### DAMAGE WARNING

With the cover removed, it is possible to misalign the 3-position I/O connectors. **This may damage the user's external I/O devices** (ClearCore is generally protected against these types of use error). Check connector alignment before powering device.

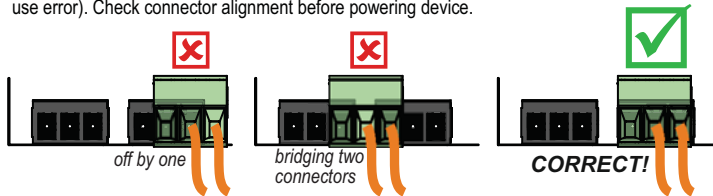


ClearCore I/O connectors

## I/O-0 through I/O-5 configured as DIGITAL INPUTS

**Note:** The wiring examples shown below **also apply to all CCIO-8 I/O points configured as digital inputs.**


### Input Equivalent Circuit

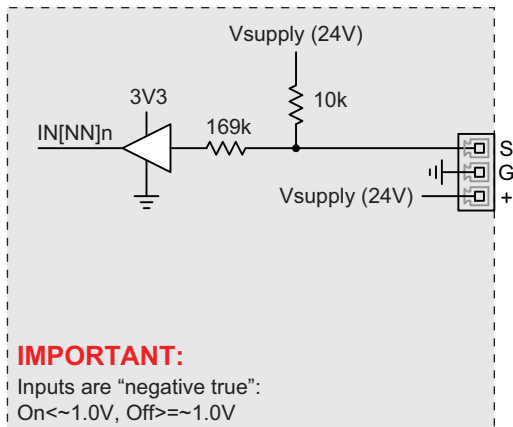


### "Ease of Use" Note: 5V Sensors

Before using 5VDC sensors, consider either  
1) sourcing 24V alternatives, or 2) providing a  
separate 5VDC supply to power your 5V  
sensors.



### Typical Sensor Hookup Details

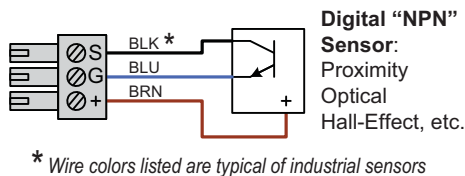

### Switch or Relay Contact




### 5V/3.3V Logic System

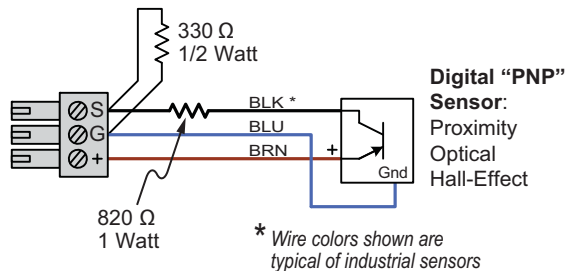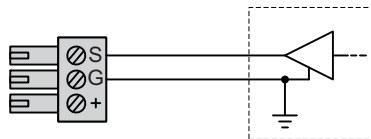

- Resistors sized for 24VDC supply voltage
- External resistors not included

## A-9 through A-12 and DI-6 through DI-8 configured as DIGITAL INPUTS


### Input Equivalent Circuit

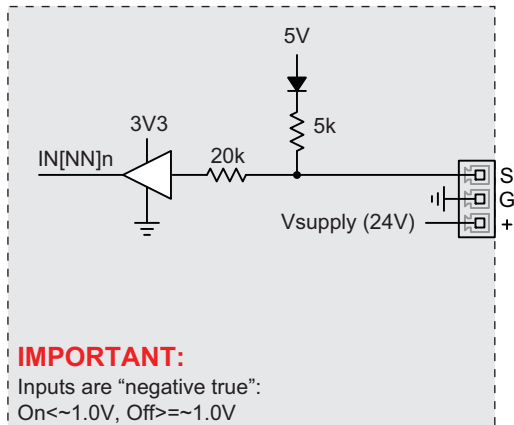


### "Ease of Use" Note: 5V Sensors

Before using 5VDC sensors, consider either:  
1) sourcing 24V alternatives, or 2) providing a separate 5VDC supply to power your 5V sensors.



### Typical Sensor Hookup Details

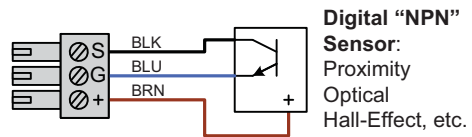

### Switch or Relay Contact



### 5V/3.3V Logic System

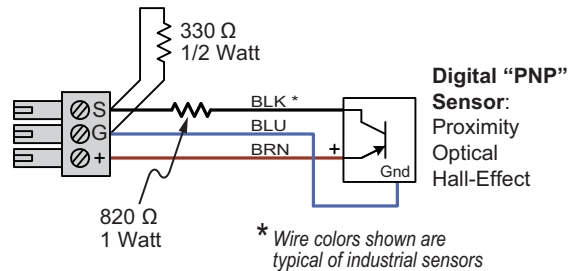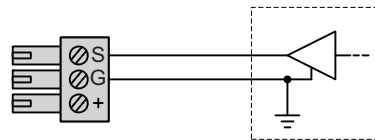


- Resistors sized for 24VDC supply voltage
- External resistors not included

## A-9 through A-12 configured as ANALOG INPUTS



ClearCore is compatible with a variety of analog sensors (transducers) including the following:

- Pressure
- Temperature
- Distance
- Mass
- Force
- Angle
- Level
- Flow
- Torque
- Inclination
- Velocity
- Electric current

### Input Equivalent Circuit

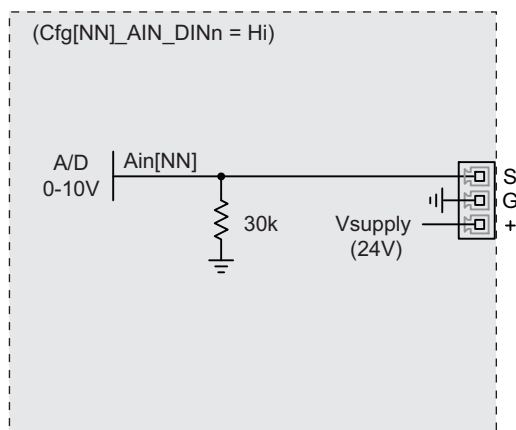


### Typical Sensor Hookup Details

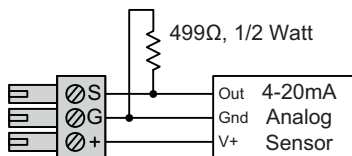

Note:


Place the 499 Ohm shunt resistor close to input terminal block.

### Typical Sensor Hookup Details



#### Engineering Note:

The repeatability of this circuit will be affected by the drift and regulation of the power supply connected to  $V_{supply}$ . (Values shown for a 24V supply.)

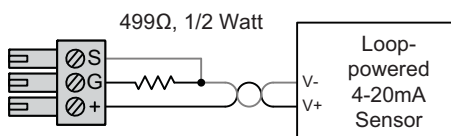

Notes:

- Place the 499 ohm shunt resistor close to input terminal block.
- Use twisted pair wire as shown to minimize noise pickup.


### Sensor Notes:

- 0-5V output sensors can be used with ClearCore, but there will be a loss of 1 bit of resolution (provided they are compatible with the ClearCore supply voltage ( $V_{supply}$ )).
- 0-20mA sensors can be used with ClearCore, but there will be some loss of linearity near zero current (this is sensor dependent).


## I/O-0 through I/O-5 configured as DIGITAL OUTPUTS

**Note:** The wiring shown in this section *also applies to all CCIO-8 points configured as digital outputs.*



### Output Equivalent Circuit

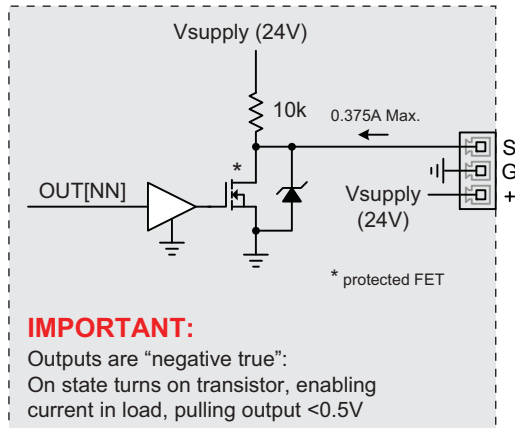


### Typical Actuator Hookup Details

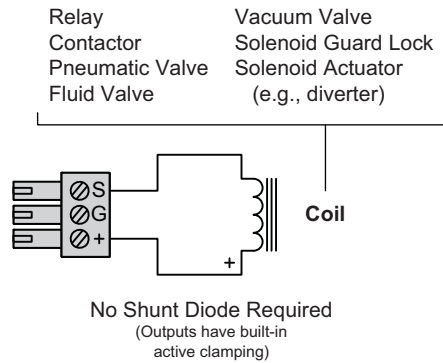


### Typical Actuator Hookup Details




### DC Motor, Pump, etc. (single direction)



### DC Fan




### 5V/3.3V Logic System



External clamping diode to logic supply may be required, consult logic IC datasheet.

## I/O-4 or I/O-5 configured as Variable, Bi-directional Drive (PWM)

### Output Equivalent Circuit

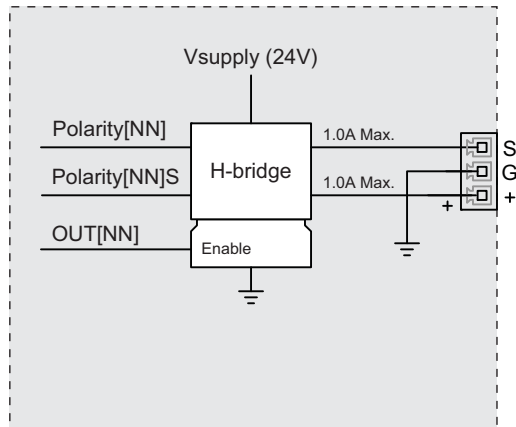

#### Average output voltage equation


$$V_{supply} * (\text{Duty Cycle of PolarityS} - \text{Duty Cycle of Polarity})$$

#### Notes:


1. For use with loudspeaker/shaker loads the maximum RMS current must not exceed 1A
2. Exceeding output current ratings will require resetting both IO-4 and IO-5 outputs by cycling the OverV\_DISABLEn signal

### Typical Actuator Hookup Details


#### Loudspeaker/Shaker



#### DC Motor, Pump, etc. (fwd/rev direction)



#### Galvanometer






## I/O-0 configured as a 4-20mA (or 0-20mA) OUTPUT

ClearCore's I/O-0 connector can be configured to supply a variable 4-20mA analog signal to control a wide variety of analog actuators. A few examples of devices that can be controlled using 4-20mA signaling include:


- Damper control
- Pressure regulator
- Rotary position actuator
- Variable speed display
- Proportional valve
- Linear position actuator
- Process meter (display)

### Output Equivalent Circuit

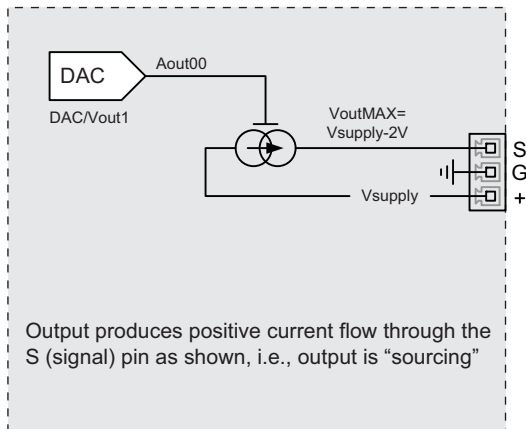

### Typical Actuator Hookup Details


#### 4-wire Actuator

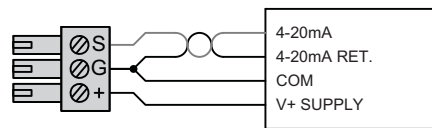

#### Notes:


- Connect signal and supply return wires close to output terminal block
- Use twisted pair as shown for best noise immunity

#### 3-wire Actuator




### Typical Actuator Hookup Details

#### 2-wire Control

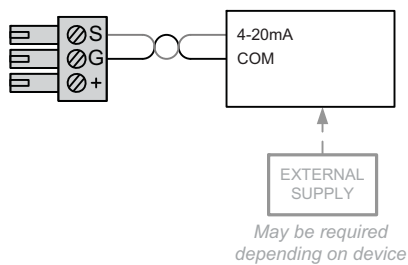

#### 3-wire 0-10V Actuator

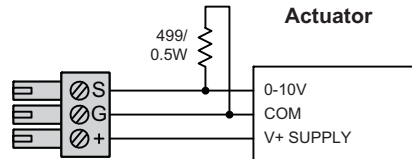


#### Note:

Place 499 Ohm shunt resistor close to actuator

ClearCore Combined I/O Header

The ClearCore I/O header (labeled "Combined I/O" on the case) provides an alternate, functionally identical way to connect I/O devices to ClearCore's I/O points.

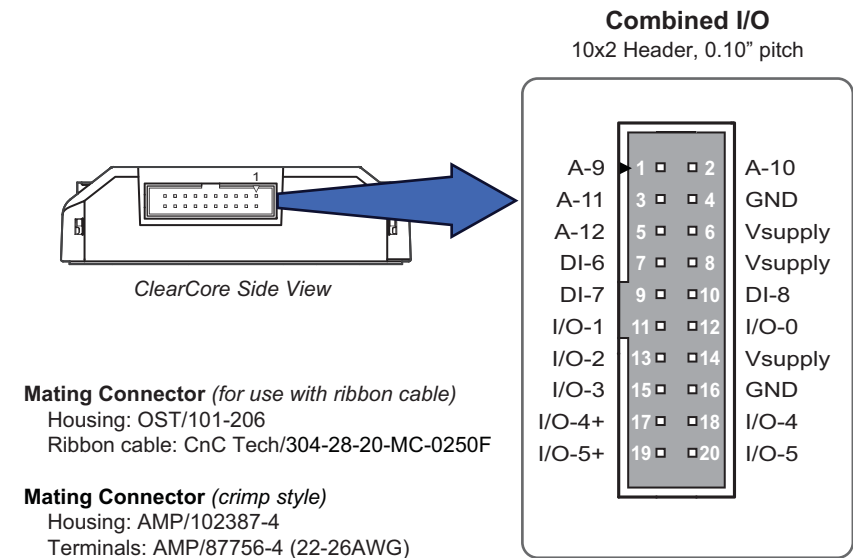

ClearCore I/O Header

## Wiring I/O Devices to CCIO-8

### IMPORTANT NOTES

- All CCIO-8 I/O points are electrically identical to ClearCore I/O points I/O-1, I/O-2, and I/O-3. **The only functional difference is that the CCIO-8 points cannot output PWM signals.**
- CCIO-8 I/O points can be configured as either digital inputs or digital outputs.

### I/O-0 through I/O-7 configured as DIGITAL INPUTS


The wiring for all 8 of these I/O points (as inputs) is the same as the wiring for ClearCore [I/O-0 through I/O-5 configured as DIGITAL INPUTS](#)

### I/O-0 through I/O-7 configured as DIGITAL OUTPUTS

The wiring for all 8 of these I/O points (as outputs) is the same as the wiring for ClearCore [I/O-0 through I/O-5 configured as DIGITAL OUTPUTS](#)

### CCIO-8 Combined I/O Header

The CCIO-8 I/O header (labeled "Combined I/O" on the board) provides an alternate, functionally identical way to connect I/O devices to ClearCore's I/O points.

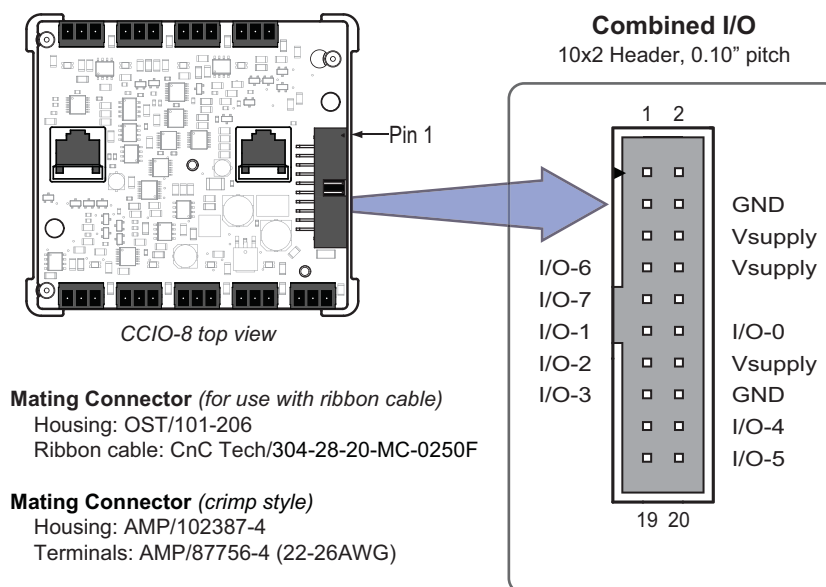

CCIO-8 I/O Header


## Motor Connectors (M-0, M-1, M-2, M-3)

ClearCore includes four multi-function motor connectors that each feature three (3) specialized outputs and one (1) specialized input. They are plug and play compatible with Teknic ClearPath motors, but are not limited to only ClearPath motors.

ClearCore can be programmed to send different types of signals to the motor connectors, including:

- Step & Direction signals to ClearPath-SD (Step & Dir) series motors
- Step & Direction signals to third-party compatible servo or step motor drives
- Digital control signals to ClearPath-MC (Motion Controller) series motors

**Note:** ClearCore motor connectors are designed to send and receive *low-power signals only*. **These connectors cannot directly power the phase windings of servo or stepper motors.**

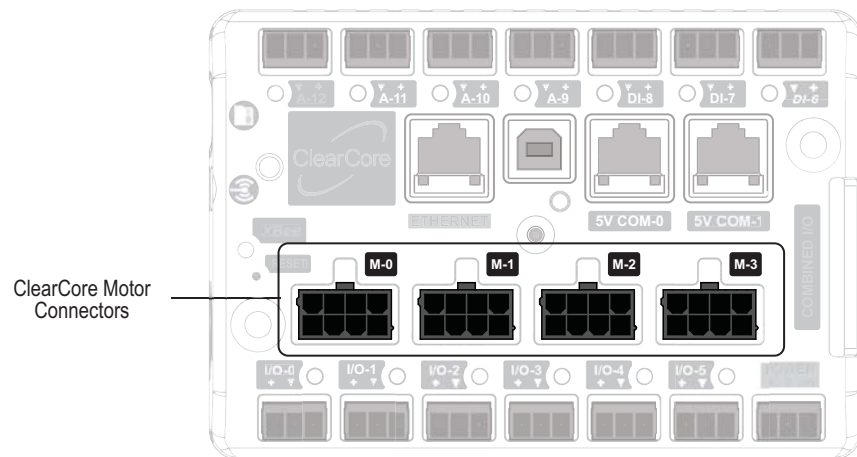

ClearCore motor connectors

## How to Wire a ClearPath Motor to ClearCore

Connect ClearPath motors to ClearCore with a Teknic controller cable (or make your own).


### ClearPath Controller Cables

**Order from Teknic.** The quickest way to connect a ClearPath motor to ClearCore is with a ClearPath controller cable available from [teknic.com](http://teknic.com). See links below for information and pricing.

[CPM-CABLE-CTRL-MU120](#) 10 ft. ClearPath controller cable


[CPM-CABLE-CTRL-MM660](#) 55 ft. ClearPath controller cable

**Build your own.** ClearPath controller cables can also be built with off-the-shelf components available from electronics distributors like Dig-Key. See Appendix C for a full list of parts and tools required to build ClearPath controller cables.

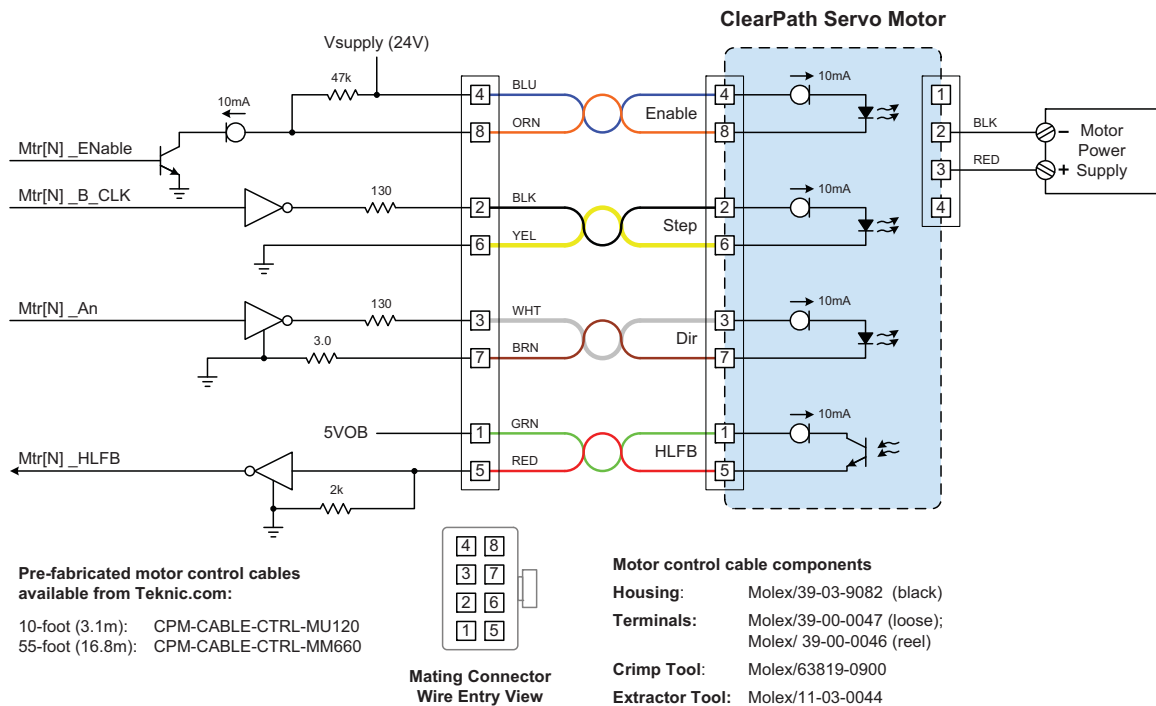

ClearPath motor connected to ClearCore

## Wiring a Stepper Motor Drive to ClearCore

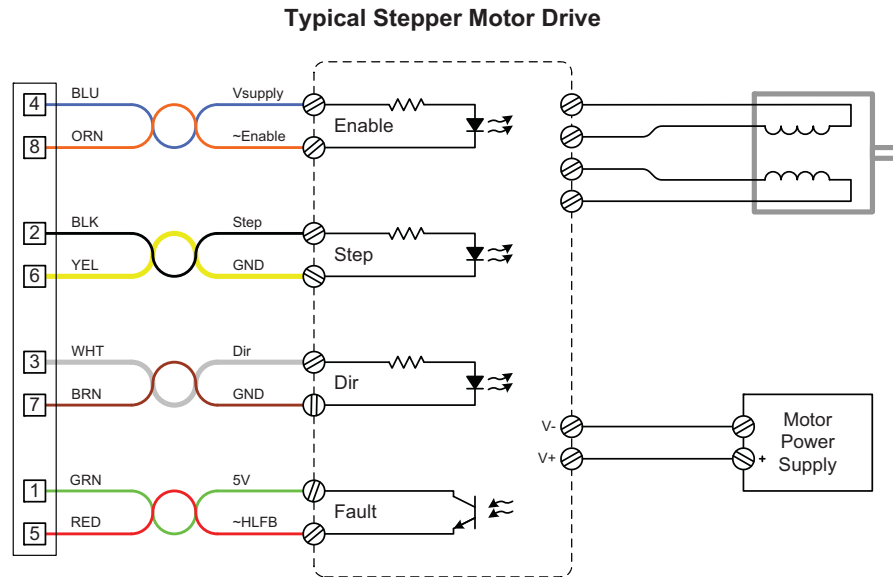


*Stepper motor drive wired to ClearCore controller*

## Serial COM Ports (COM-0, COM-1)

ClearCore includes two multi-function serial ports: COM-0 and COM-1. These ports are accessed through RJ-45 connectors as shown below. Each port is individually configurable for use with SPI devices, UART devices, or RS-232 transceivers. Each port includes a 5V power pin to power the remote device if needed.

### Notes

- The CCIO-8 (I/O expansion board) can be connected to ClearCore at COM-0 or COM-1 using a standard CAT-5e cable.
- Only one branch of CCIO-8 expansion boards is supported (i.e. you can't connect a CCIO-8 board to both ports simultaneously).

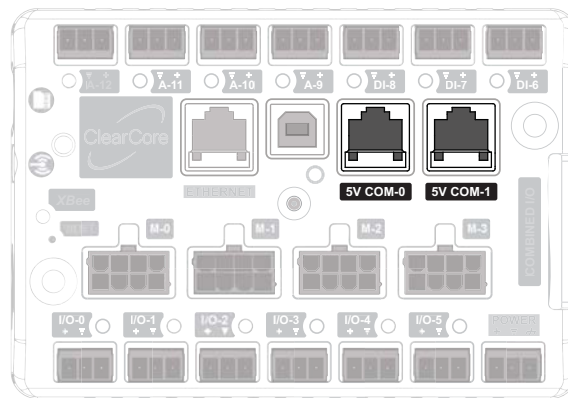


*Serial Ports COM-0 and COM-1*

## COM-0, COM-1 with 5V compatible RS-232 transceivers

### COM Port Equivalent Circuit

#### COM-[N] For use with 5V compatible RS-232 transceivers

(CfgCom[N]\_UART\_SPln = Low, CfgCom[N]\_Polarity = Hi)

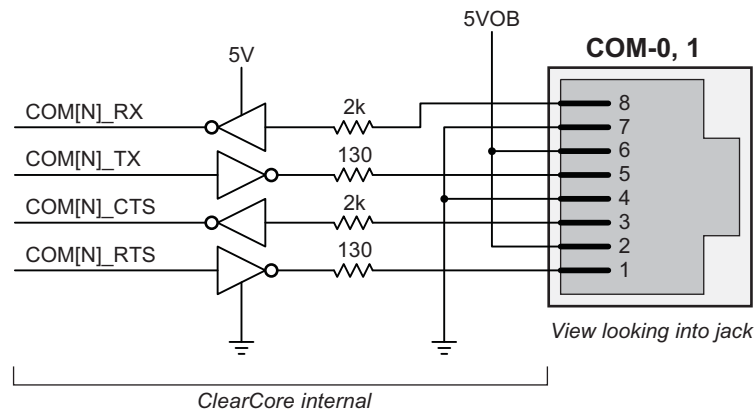


### Typical Hookup Details

**IMPORTANT:** Mating serial ports must be compatible with 0-5V signals or a converter must be used.


#### DCE/Modem

**Male Connector Shown**  
(e.g. Amphenol/DE09P064TXLF)

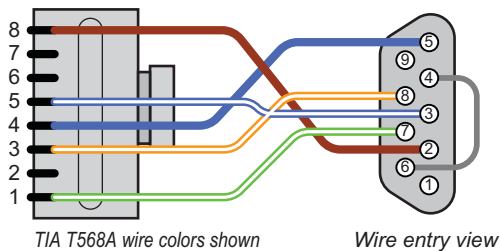

#### DTE/Host

**Female Connector Shown**  
(e.g. Amphenol/DE09S064TLF)

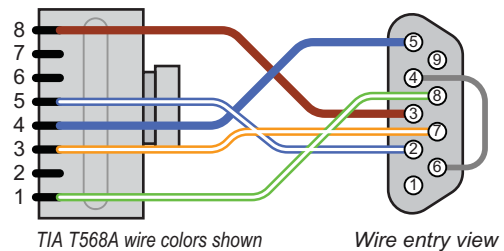

COM-0, COM-1 configured for RS-232




## COM-0, COM-1 configured for 5V logic UART devices


### COM Port Equivalent Circuit

#### COM-[N] For use with 5V logic UART devices

(non-inverting) (CfgCom[N]\_UART\_SpIn = Low, CfgCom[N]\_Polarity = Low)

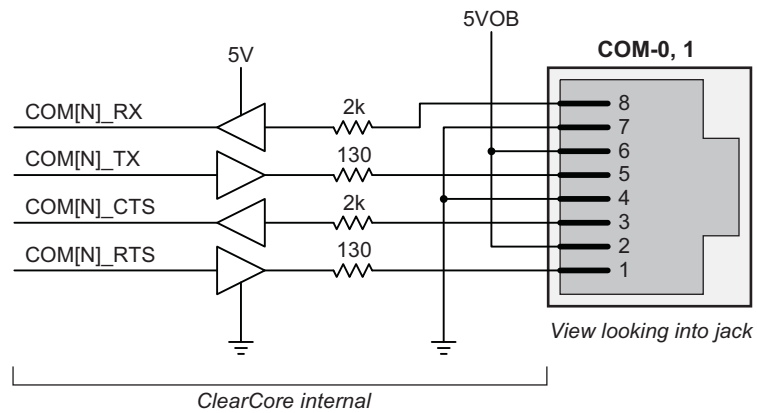

### Typical Hookup Details

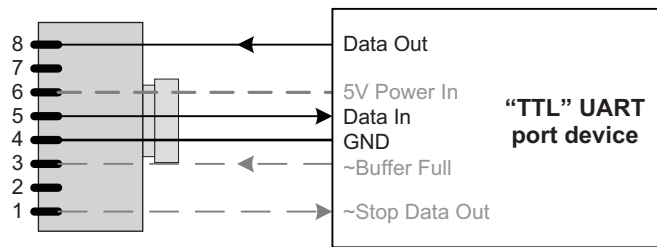

- 5VOB supplies 5V power for any loads connected to COM-0 and COM-1 connectors
- 5VOB also supplies the optional XBee module if installed
- Total current available from 5VOB is 450mA
- See block diagram in appendix E for details


COM-0, COM-1 configured for 5V UART devices

## COM-0, 1 configured for SPI devices


### COM Port Equivalent Circuit

#### COM-[N] For use with SPI devices

(CfgCom[N]\_UART\_SpIn = Hi, CfgCom[N]\_Polarity = Low)

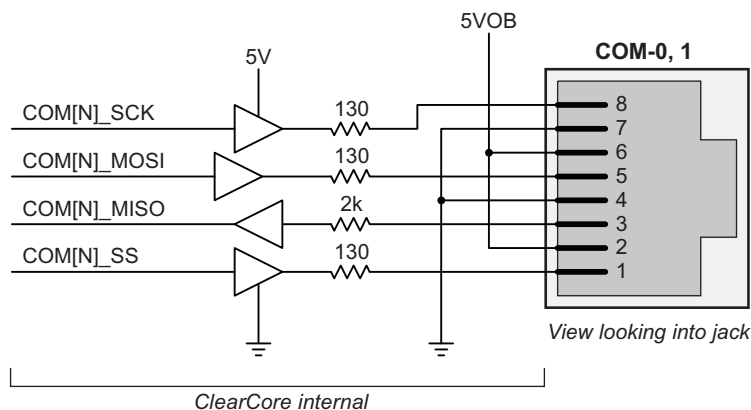

### Typical Hookup Details

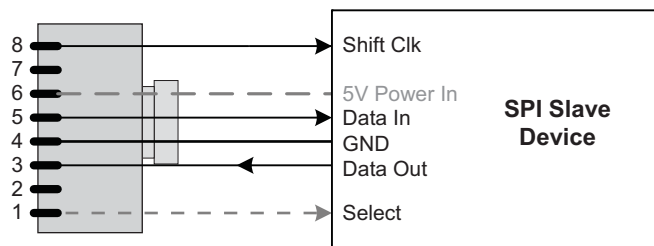

- 5VOB supplies 5V power for any loads connected to COM-0 and COM-1 connectors
- 5VOB also supplies the optional XBee module if installed
- Total current available from 5VOB is 450mA
- See block diagram in appendix E for details

COM-0, COM-1 configured for use with SPI devices

## Other Ports and Connectors

### USB Port

The USB (type-B) serial port can be used for uploading application code as well as serial communication with a PC or other device.

### Ethernet Port

ClearCore includes a 10Base-T/100Base-TX Ethernet connector to provide network connectivity to your ClearCore. Access is through a standard RJ-45 jack. Use only CAT5e cable or better (non-crossover type).

### XBee Connector

*Note: The ClearCore cover must be temporarily removed to install or remove an XBee module.*

The following XBee modules are compatible with ClearCore. *Note: Only the **through-hole versions** of these XBee devices can be used with ClearCore.*

- Digi XBee 3
- Digi XBee Wi-Fi (S6B)
- XBee or XBee-PRO Zigbee
- XBee or XBee-PRO DigiMesh 2.4 (S2C)
- XBee or XBee-PRO 802.15.4
- XBee-PRO 900HP (S3B)

#### Notes

- 2G/3G and 4G-LTE cellular XBee modules **are not compatible** with ClearCore.
- The ClearCore's polycarbonate cover has holes and knockouts to accommodate select XBee antenna types.

## JTAG Connector

An onboard JTAG connector is provided for developers who wish to connect a third-party debugging tool during development. Note: You must remove The ClearCore cover to access the JTAG connector.

**Recommended debugger:** Atmel p/n: [ATATMEL-ICE](#) (for use with Atmel Studio 7 IDE)

**Cable for above debugger :** TAG-Connect p/n: [TC2030-CTX-LEMTA](#), 6-Pin, "plug of nails" connector that connects directly to the ClearCore board. The opposite end of this cable connects to the ICE debugger's "SAM" port.

*\*LEMTA option must be selected for compatibility with the Atmel-ICE debugger.*

## Micro-SD Card Drive

ClearCore includes a built-in micro-SD card drive with read/write capability. Typical uses include:

- Data logging for debugging and troubleshooting
- Machine configuration data storage
- General file storage

### Micro-SD Card Compatibility

Use only Micro SDHC cards (which utilize **FAT32 file systems** by default) with your ClearCore. These cards typically range from 4Gb to 32Gb of storage capacity. Micro-SD cards with file systems other than FAT32, for example **exFAT and NTFS, will not work with ClearCore** and must be formatted to FAT32 file systems to be compatible with ClearCore.

## CL-ENCDR-DFIN Encoder Input Adapter Board

### Introduction

The CL-ENCDR-DFIN encoder input adapter board lets you send externally generated encoder data to your ClearCore or ClearLink device. This accessory board is sold separately at [Teknic.com](http://Teknic.com).


**Note:** CL-ENCDR-DFIN takes input from one, three-channel differential encoder only. ClearCore and ClearLink devices can receive input from one external encoder per unit.

**IMPORTANT:** When using CL-ENCDR-DFIN, **do not connect external I/O devices to connectors DI-6, DI-7 and DI-8 on your ClearCore or ClearLink device.** Doing so will likely result in intermittent or nonexistent encoder feedback and may permanently damage your CL-ENCDR-DFIN board.

**Index channel bypass.** If you do not need to use the index channel from your encoder, you may remove jumper P3 from the CL-ENCDR-DFIN board. This will allow you to use DI-8 as a standard input on your ClearCore or ClearLink.


**Supported encoders.** Many third-party encoders with standard, 3-channel, differential output signals will work seamlessly with CL-ENCDR-DFIN. Check the encoder manufacturers specifications to verify compatibility with CL-ENCDR-DFIN before attempting to use.

For information on how to use external encoder data, see the software documentation for your ClearCore or ClearLink device.

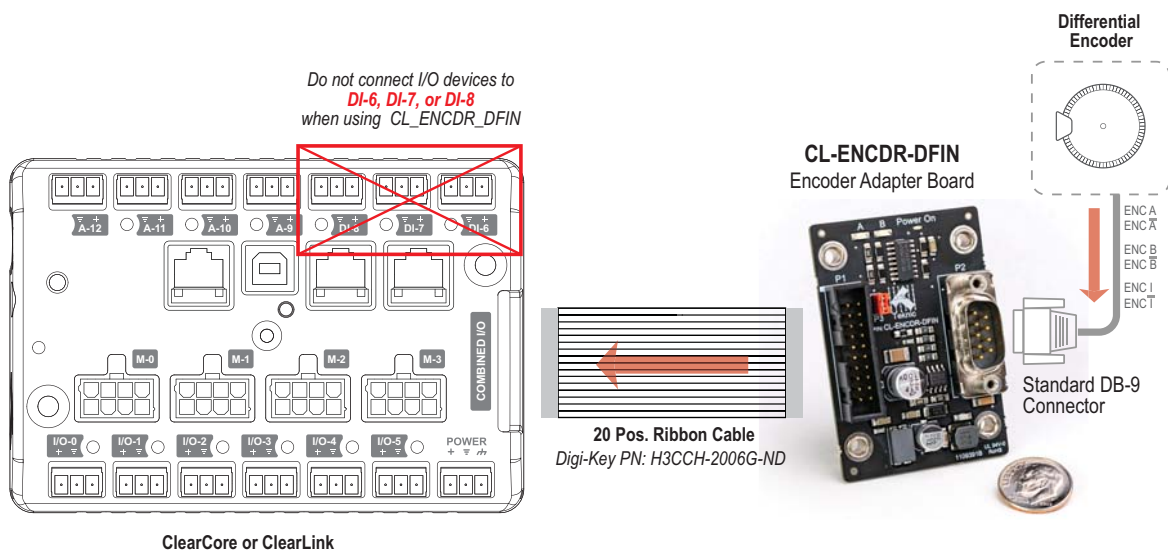


CL-ENCDR-DFIN Encoder Input Adapter Board

## Connectors and Pinouts

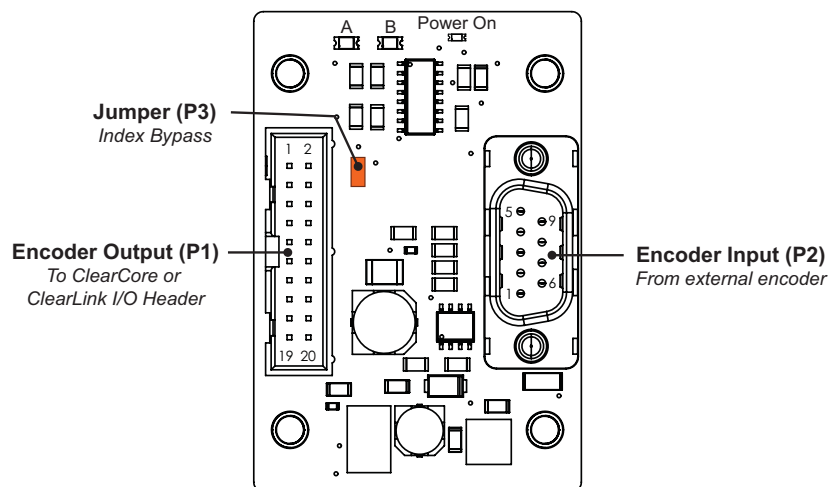

P1 - To ClearCore or ClearLink	
Pin	Signal Name
1	N/C
2	N/C
3	N/C
4	GND
5	N/C
6	N/C
7	Encoder A
8	N/C
9	Encoder B
10	Encoder I
11	N/C
12	N/C
13	N/C
14	V+
15	N/C
16	GND
17	N/C
18	N/C
19	N/C
20	N/C

P1



### Ribbon Cable Assembly

20 Position Cable Assembly, Rectangular  
 Socket to Socket, 0.500" (12.70mm, 6.00")  
 Digi-Key PN: H3CCH-2006G-ND

### Mating Connector (for use with ribbon cable)


Housing: OST/101-206  
 Ribbon cable: CnC Tech/304-28-20-MC-0250F

### Mating Connector (crimp style)

Housing: AMP/102387-4  
 Terminals: AMP/87756-4 (22-26AWG)

P2 - Encoder Input	
Pin	Signal Name
1	GND
2	I+
3	B+
4	A+
5	5V
6	I-
7	B-
8	A-
9	GND


P2



### Mating Connector

Standard D-sub 9  
 shell, female contacts

## Dimensions

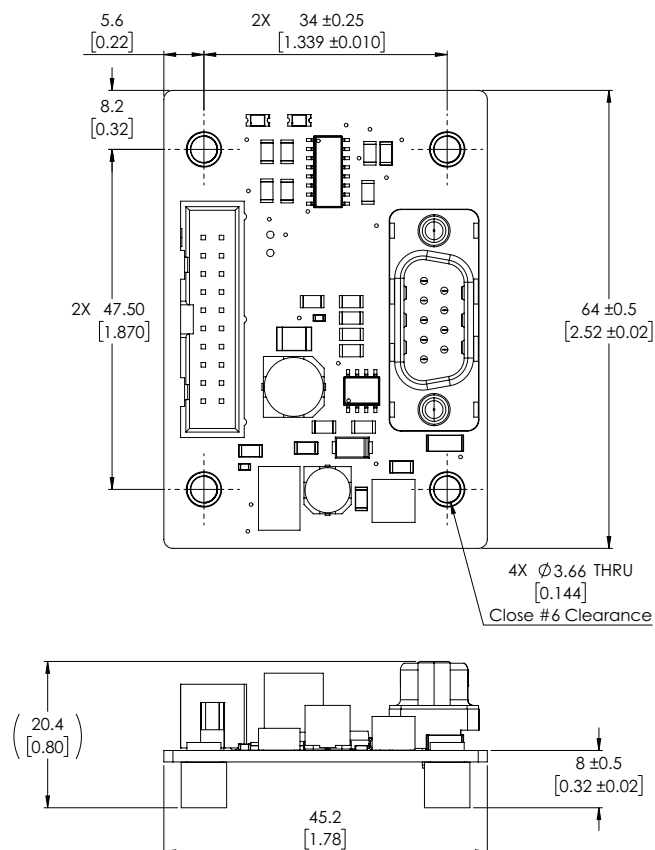

## Specifications

Specification	Min.	Typ.	Max.	Unit
Operating Temperature	-20		50	°C
Count Rate			2	MHz
5V Output Current			300	mA
A, B, I Signal Termination Impedance		470		Ω
Index Capture Delay		2		μs
Common Mode Input Voltage	-7		7	V
Input Differential Hysteresis		60		mV

## Appendix A: Troubleshooting

### Recovering an Unresponsive ClearCore

It is possible to crash ClearCore's processor due to poor coding practices or complications during program upload. A crash of this nature can be distinguished from normal operation by looking at the four blue under-glow LEDs. Normally these LEDs will "breathe" on and off. Instead, when crashed, these LEDs will be solid on or solid off.

*Note: If all LEDs are off, the issue could be lack of DC power.*

**Double click the reset button** to recover an unresponsive ClearCore. Two clicks in rapid succession will reset the ClearCore into its Bootloader mode.

You can read more on the ClearCore Bootloader here:

<https://teknik-inc.github.io/ClearCore-library/BootloaderMain.html>

A known-good program can be uploaded after resetting to Bootloader mode. Do not upload the same program that originally caused the crash, else ClearCore would be susceptible to the same crash again.

The most common root causes of a processor crash are:

- Reading/writing to an array address that exceeds the size of the array (e.g. if a buffer array is used for external communication, and the code lacks proper checks for a completely filled buffer)
- Memory leak within the program (e.g. creating an excessive number of variables without letting them go out of scope)
- Communication disruption during program upload
- Some improper hardware connections

### Status Blink Codes

A full description of the ClearCore status blink codes is available in the ClearCore Library reference document at the following URL:

<https://teknik-inc.github.io/ClearCore-library/BlinkCodes.html>

### Windows 7 Issues

USB driver management in Windows 7 causes issues in some installations which affect uploading code to ClearCore. Extra manual steps may be required to upload code in these systems.

If you experience problems when using ClearCore with Windows 7, please try the following:


- Press ClearCore reset button



- Turn off USB selective suspend (this is the Windows USB power save feature). Google the above phrase for instructions
- Insert a USB 2.0 hub between the PC and ClearCore
- Load the latest USB 3.0 drivers for your PC's hardware

## Appendix B: Mechanical Reference

### ClearCore Mounting and Clearance Dimensions

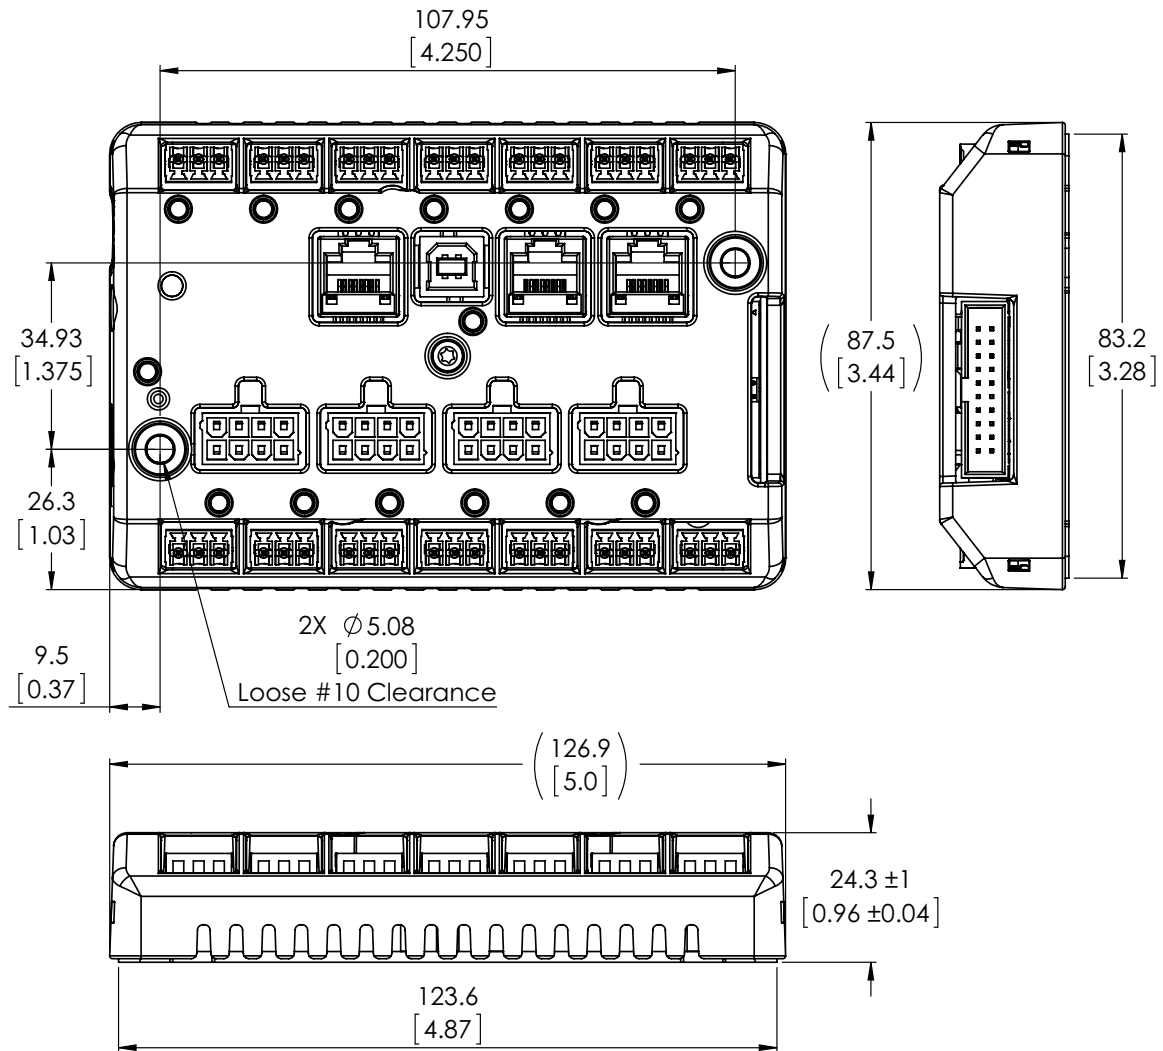

ClearCore Mounting Dimensions



#### ClearCore Mounting and Clearance Notes

- Leave a minimum of 1.5" (38.1mm) clearance around all ClearCore surfaces (except the mounting plate) for appropriate ventilation.
- Provide appropriate clearance for top and side-mounted cables.  
Note: some Ethernet and USB cables may require up to 2" clearance.



## Appendix C: Mating Connectors and Terminals

Ref.	Mating Connector Description	Mating Connector or Cable PN	Terminal Description	Terminal PN	Tooling	Wire Gauge (AWG)
A	Screw terminal block, 3-position, 3.81mm pitch	Molex/0395105003	<b>OPTIONAL</b> Wire ferrule, 20-24 AWG, white	<b>OPTIONAL</b> American Electrical 1181050	<b>OPTIONAL</b> Crimp Tool American Electrical TRAP 22-10	20-24
B	Molex MiniFit-Jr, receptacle, 8-position	Molex part numbers: 39-01-2080 (natural, UL 94V-2) 39-01-3085 (black, UL 94V-2) 39-01-2085 (natural, UL 94V-0) 39-03-9082 (black, UL 94V-0)	Female crimp terminal, tin plate, 22-28 AWG	Molex/39-00-0046 (reel) Molex/39-00-0047 (loose)	<b>Crimp tool</b> Molex/63819-1000  <b>Extraction tool</b> Molex/11-03-0044	22
C	<b>Crimp style connector</b> , 20 position, free hanging, panel mount, 0.10" (2.54mm) pitch	TE/102387-4	Socket contact, gold plate, 22-26 AWG crimp	TE/87756-4	<b>Crimp tool</b> TE/169481-1	22-26
	<b>Ribbon cable connector</b> , 20-position, IDC, gold finish	<b>Connector</b> OST/101-206 <b>Ribbon cable stock</b> CnC Tech/304-28-20-MC-0250F	N/A	N/A	N/A	N/A
D	JTAG, 6-pin, "Plug-Of-Nails" connector for ARM CORTEX SWD (single wire debug) applications	<b>Teknic cable part number:</b> P/N TC2030-CTX-LEMTA <b>for use with Atmel ICE debugger</b> P/N ATATMEL-ICE-BASIC.	N/A			

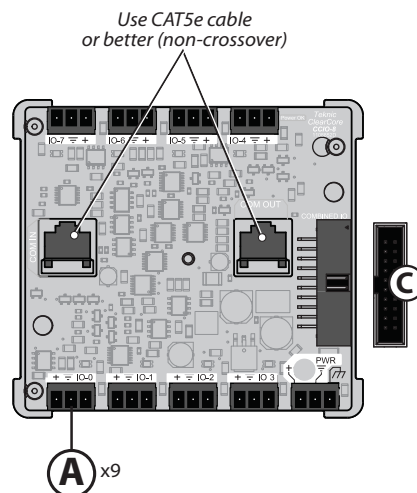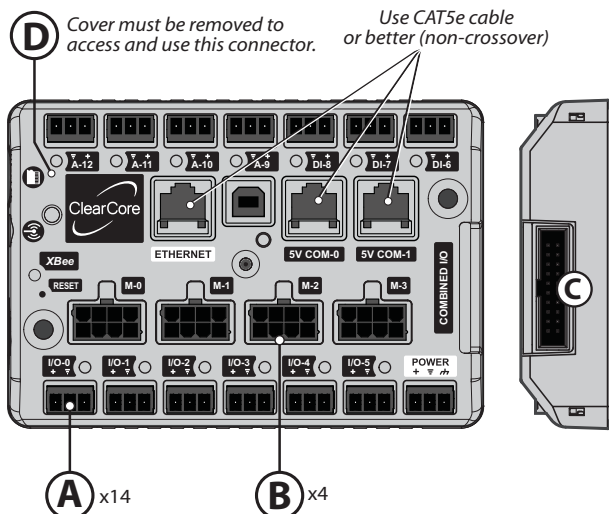

## Appendix D: Specifications

### ClearCore Specifications

<b>Mechanical</b>	
Dimensions	5.0" x 3.5" x 1.0" (127mm x 88.9mm x 25.4mm)
Weight (with cover)	0.41 lbs (186 g)
Material	3mm thick polycarbonate cover, aluminum mount frame
<b>Electrical</b>	
Voltage Input	20-28 VDC (24VDC nominal)
Output Current Capability	I/O 0,1,2,3 - 375 mA RMS, (750 mA peak) I/O 4,5 - 750 mA RMS, (1000 mA peak)
Indicator LEDs for each input	yes
IP rating	IP20
Operating Temperature/Humidity	-20C to 50C, 0-90% non-condensing
Storage Temperature	-40C to 85C
Power Consumption	300mA@24V Adding an XBee will add as much as an additional 100mA@24V
Protection features	Overcurrent protection on all outputs Inductive clamping on all outputs Board master overvoltage and overcurrent protection ESD protection features on all I/O circuits
Capacitive load (max.)	Capacitance on I/O-0 through I/O-5 (and expansion port power pins) collectively may not to exceed 250uF.
<b>Processing/Communication</b>	
Total I/O	13 built-in I/O points, software configurable as any combination of up to 13 digital inputs, 4 analog inputs, 6 digital outputs, 2 H-Bridge/speaker outputs and 1 analog output (4-20mA or 0-20mA). See I/O table below.  Another 64 digital I/O can be added by using optional 8-point I/O expansion modules (p/n CCIO-8).
Serial communication	2 Multi-functional, individually configurable serial ports that can be used as a UART, SPI, or RS-232 at up to 115.2kBaud.  Rates up to 2MBaud are achievable depending on cable length, slave transceiver circuit and grounding.  5V power pins are available on each port.
Ethernet	10Base-T/100Base-TX Ethernet
USB	USB 2.0
Wireless connectivity	Accepts Xbee modules for wireless connectivity (Wi-Fi, Bluetooth, Mesh, etc.)
Programming Language	C++
Recommended IDE	Microchip Studio 7 (or higher), or Arduino IDE 1.8.x (or higher) if used with the ClearCore Arduino Wrapper Library.
Memory Capability	512 KB Flash 192 KB RAM Storage expansion via onboard SD card drive
Supported development environment	Windows 10, Windows 7* (see note)

Processor type and speed			32 bit floating point ARM M4F processor 120 MHz (p/n SAME53N19A)				
Max Step Rate			500kHz				
			* Win 7 note: <i>USB driver management in Windows 7 causes issues in some installations which affect the uploading of code to ClearCore. Extra manual steps may be required to upload code in these systems.</i>				
Compliance							
CE, RoHS							
I/O Function Table							
Label	Digital Input	Digital Output <sup>1</sup>	0-10V Analog Input	4-20 mA Output <sup>2</sup>	Servos or Steppers	Speaker Tones	DC Motor Drive
IO-0	yes	yes		yes			
IO-1	yes	yes					
IO-2	yes	yes					
IO-3	yes	yes					
IO-4	yes	yes				yes	yes
IO-5	yes	yes				yes	yes
DI-6	yes						
DI-7	yes						
DI-8	yes						
A-9	yes		yes				
A-10	yes		yes				
A-11	yes		yes				
A-12	yes		yes				
M-0					yes <sup>3</sup>		
M-1					yes <sup>3</sup>		
M-2					yes <sup>3</sup>		
M-3					yes <sup>3</sup>		
CCIO-8 <sup>4</sup>	yes	yes					
Note 1: All digital outputs are PWM capable (except for those on the CCIO-8 expansion board).							
Note 2: This output can also provide 0-20mA, which is less commonly used.							
Note 3: Each motor connector has 3 digital outputs (step, dir., enable) and 1 digital input.							
Note 4: There are 8 of these I/O points on the CCIO-8 expansion module.							

## CCIO-8 Specifications

Mechanical							
Dimensions	3.6" x 3.28" x 1.0" (91.5mm x 83.3mm x 25.4mm)						
Weight	3.18 oz. (90 g)						
Material	Assembled circuit board with aluminum mount frame						
Electrical							
Voltage Input	20-28 VDC						
Output Current Capability	All I/O points 375mA RMS (750mA peak)						
Indicator LEDs for each input	Yes						
IP Rating	IP20						
Operating Temperature/Humidity	-20C to 50C, 0-90% non-condensing						
Storage Temperature	-40C to 85C						
Power Consumption	100mA@24V or 150mA@12V						
Protection Features	Overcurrent protection on all outputs Inductive clamping on all outputs ESD protection features on all I/O circuits						
Processing / Communication							
Total I/O	<p><b>Note:</b> All I/O points on CCIO-8 are electrically identical to I/O-1, I/O-2, and I/O-3 on ClearCore/ClearLink.</p> <p>8 built-in I/O points, software configurable as any combination of up to 8 digital inputs and 8 digital outputs.</p> <p>A total of 8 CCIO-8 boards can be connected to one ClearCore, for a total of 64 additional digital I/O points.</p> <p>All configuration of I/O hardware is controlled by software, i.e., there are no jumpers, DIP switches, trim-pots, etc.</p>						
I/O Update Rate	0.2mS (1-2 boards), 0.4mS (3-4 boards), 0.6mS (5-6 boards), 0.8mS (7-8 boards)						
Connectivity	ClearCore connects to "COM IN" of the first CCIO-8. Any additional CCIO-8 boards are connected COM OUT -> COM IN. Use CAT5e cable (non-crossover) or better. Max cable length = 100 feet.						
Compliance							
CE, RoHS							
I/O Function Table							
Label	Digital Input	Digital Output <sup>1</sup>	0-10V Analog Input	4-20 mA Output	Servos or Steppers	Speaker Tones	DC Motor Drive
I/O-0	yes	yes					
I/O-1	yes	yes					
I/O-2	yes	yes					
I/O-3	yes	yes					
I/O-4	yes	yes					
I/O-5	yes	yes					
I/O-6	yes	yes					
I/O-7	yes	yes					


Note 1: Digital outputs on CCIO-8 are not PWM capable.

# Appendix E: Processor Signal Routing Schematics

Processor Signal Routing Block Diagram: I/O and Communication

## Signal Name Conventions

- Curly braces '{ }' enclose an alternate signal name appropriate when the hardware is not present.
- Any signal name ending in lower case "n" indicates that it is true in a low state (i.e., "negative true")

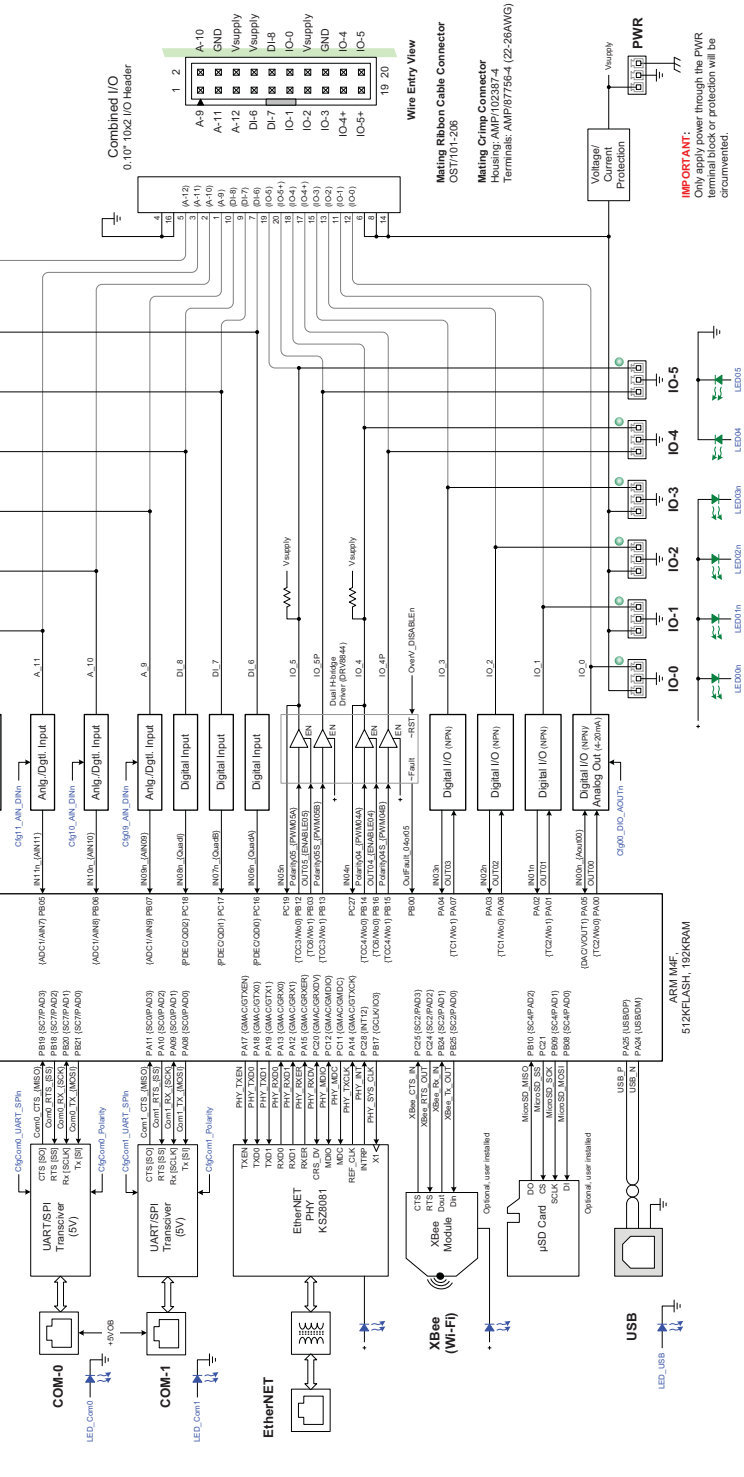





**Teknic, Incorporated**  
7650 Omnitech Pl  
Victor, NY 14564

© 2024 TEKNIC INC. ALL RIGHTS RESERVED