

CZECH TECHNICAL UNIVERSITY IN PRAGUE
FACULTY OF ELECTRICAL ENGINEERING



Masterer Thesis

**Progressive Computation of Global
Illumination**

Prague, 2012

Author: Bc. Zdeněk Glazer

Aknowledgements

I would like to thank to Hanka Pokorná, who has always supported me. And also to Ing. Jaroslav Sloup for supervision of this thesis.

Declaration

I hereby declare that I have completed this thesis independently and that I have listed all the literature and publications used.

Prague, 10. 11. 2012

Signature

Abstract

Global illumination always played a key role in realistic computer generated image synthesis. Many algorithms have been developed to compute realistic images in reasonable time, though rendering volumetric phenomenas such as smoke including volumetric caustics and complex glossy reflection and refraction paths is still consuming task. Recently some new light caching approaches and progressive rendering techniques were discovered. This thesis aims to test their accuracy and feasibility on various scenes containing heterogenous participating media.

Abstrakt

Globální osvětlení vždy hrálo klíčovou roli při realistické syntéze obrazu. Existuje mnoho algoritmů které dokáží realistický obraz vypočítat v rozumném čase, ale výpočet globálního osvětlení u scén obsahujících opticky aktivní prostředí, jako je například kouř je stále časově velice náročný. V nedávné době se objevily nové postupy předvýpočtu světelných cest ve scéně a nové progresivní metody výpočtu obrazu. V této diplomové práci chceme prověřit jejich přesnost a rychlost na různých scénách obsahujících nehomogenní opticky aktivní prostředí.

Vložit zadání práce

Contents

List of figures	ix
List of tables	xi
1 Introduction	1
1.1 Thesis structure	2
2 Fundamentals of realistic image synthesis	3
2.1 Radiometry	4
2.1.1 Radiometric quantities	4
2.1.2 Relationships between quantities	5
2.2 Surface interaction	6
2.2.1 BRDF	6
2.2.2 Rendering equation	7
2.3 Volume interaction	8
2.3.1 Phase functions	8
2.3.2 Rendering equation including participating media	8
2.4 Volume and surface interaction	8
2.4.1 Extended rendering equation	10
3 Common solutions	11
3.1 Rasterization	11
3.2 Raytracing	11
3.2.1 Raymarching volumes	11
3.2.2 Unbiased methods	12
3.2.3 Biased methods	12

4	Consistant progressive methods	13
4.1	Stochastic progressive photon mapping	13
4.2	Beam mapping	13
4.3	Virtual point lights	13
4.4	Virtual ray lights	13
4.5	Virtual beam lights	14
5	Proposed solution	15
6	Implementation	17
6.1	Volume representation	17
6.2	Ground truth	17
7	Results	19
8	Conclusion	21
8.0.1	Future work	21
	Literatura	24
A	Appendix	I
B	DVD Content	III

List of Figures

2.1	2D plot of Plot of Heney-Greenstein phase function.	9
3.1	Nvidia smoke particle demo.	12
6.1	Energy contribution of phase functions, inverse squared distance and both samples on ray lights.	18

List of Tables

2.1	Table summary of the radiometric quantities.	5
-----	--	---

Chapter 1

Introduction

People have always been curious about new forms of visualization and illusion of reality. In the last decade computer generated imagery has reached a state, when majority of the public can't distinguish real photographs from entirely synthesized images. Thanks to this advancements we can enjoy otherwise impossible film shoots, imaginary worlds, visualizations of non existing buildings and much more. All this become possible, because ways how to represent objects and simulate light transport using computer algorithms have been found. The other important factor is ever growing computation power of these devices, which enables us visualize highly detailed datasets with complex materials and challenging lighting scenarios.

Even though many things are possible to simulate and visualize efficiently these days volumetric phenomenons such as clouds, smoke and other optically active medias are still real challenge even for high-end computers. This is all caused by the fact that the data we try to visualized are volumetric and that light passing through can be absorbed, scattered or even emitted in different wavelength (fig aurea borealis). This means that we can no longer assume that visibility of an object can be determined simply by determining if it is hidden behind other object or not.

In terms of feasible render times only direct illumination component can be computed. This approach can give us satisfying results such as those on the figure (fig good rays). Unfortunately many cool looking effects such as volumetric caustics, which can be seen on the figure (fig lasers) are impossible to get using this approach.

This thesis focuses on methods, which can render anything with physical accuracy and

without restrictions on the rendered scene. The other very important bonus of these methods is their progressive nature. In the first passes the coarse illumination of the scene is computed and it's progressively refined (fig image getting better). This for example means, that artist defining lighting mood of the visual effect shots can iterate faster. They have got something to show to the director, which results in quick turnarounds and substantial cost and time savings.

Our aim is to implement these progressive Monte Carlo methods in the presence of heterogenous, optically active media and test them on scenes with varying complexity.

1.1 Thesis structure

This Thesis consists of eight main chapters. In the first chapter we have introduced you to the problem. In the second chapter the nifty theoretical details behind realistic image synthesis are exposed and fundamental terms such as BRDF, phase function and rendering equation defined and explained.

The third chapter is an overview of current strategies and algorithms used to visualize the volumetric phenomenons and their pros and cons listed. The fourth chapter leads us to the core of this thesis, the progressive methods of computation the global illumination in the presence of volumetrically active phenomenons.

In the fifth chapter we choose some of the methods mentioned in preceding chapter and further analyze them and propose a way how to and why to use them. In the sixth chapter we present our solution and describe it's internal structure. In the seventh chapter our results and test are shown. And finally eight chapter concludes the information gained and results obtained during this thesis creation.

Chapter 2

Fundamentals of realistic image synthesis

In this chapter we briefly revise fundamental theory behind realistic computer generated imagery. Our aim is to synthesize (render) image of a virtual scene. To do this properly, with physical accuracy in mind, we have to find a suitable physical model of light.

If we would like to be absolutely correct, we would have to use quantum optics model. This would lead us to tracing individual photons and interaction with matter on an atomic level, which is completely computationally unfeasible. Nevertheless when it comes to computer graphics even a simplified ray optics model can handle majority of the phenomena we are interested in. This model assumes that light travels in straight lines, at infinite speed and the only things that might happen to it are emission, absorption, reflection, and transmission. Using this model we will be unable to simulate phenomena such as diffraction (for example chromatic aberration), polarization and other similar effects depending on light wavelengths and polarity.

When the suitable light model is chosen, we should define some numerical quantities we can compute with. In the next section we will start with radiometry quantities and inspect problem of light interaction with surfaces. This gives us enough fundamentals to formulate rendering equation. We continue with light interaction with participating media, which leads us to extended rendering equation. Algorithms mentioned in the next chapters are based on this theory and they present various methods solving this complex equation.

2.1 Radiometry

Radiometry is set of techniques for measuring different kinds of electromagnetic radiation such as light. We could have used a photometry, which on the other hand measures the response of a human eye to visible light. This basically corresponds to measurements retrieved using radiometry and weighted with an eye response function. For the purposes of this thesis we will use radiometric quantities, because corresponding photometric quantities can be easily derived.

2.1.1 Radiometric quantities

Radiant flux , also known as radiant power, denoted as ϕ . This quantity corresponds to the light power mentioned on the light bulbs in Watts. The definition is:

$$\phi = \frac{dQ}{dt} \quad [W = J.s^{-1}] \quad (2.1)$$

Where Q [J] denotes radiant energy, which describes how much energy (amount of photons times their energy) is presented in a given area at a point in time. This leads us to flux definition as amount of radiant energy going through a location over time , alternatively speaking how fast is the change of the amount of the photons in a specified location.

Irradiance , also known as flux density, denoted as $E(x)$.

$$E(x) = \frac{d\phi(x)}{dA} \quad [W.m^{-2}] \quad (2.2)$$

The irradiance at a point x on the surface S , can be expressed as an amount of incident flux to differential area at a given time.

Radiance is probably the most important quantity. Denoted as $L(x, \omega)$, where x is a point of interest and ω is a differential angle coming in a given direction, also known as solid angle.

$$L(x, \omega) = \frac{d\phi(x)}{\cos\theta dA d\omega} \quad [W.m^{-2}.sr^{-1}] \quad (2.3)$$

Radiance expresses how much flux is coming from a differential direction $d\omega$ onto a differential surface dA . The $\cos\theta$ factor compensates the shortening amount of irradiance on the surface with growing θ^1 , while the level of illumination is maintained. This is the quantity, which has to be gathered for every pixel in the rendered image.

2.1.2 Relationships between quantities

In order to render our image we have to compute radiance coming from the scene through every pixel of the virtual camera sensor. From the table 2.1 you can see that radiance units are Watts per square meter per steradian². According to the units of the remaining radiometry quantities we should be able to derive them using integration.

Radiant energy	Q	[J]
Radiant flux	ϕ	[W]
Irradiance	E	[W.m ⁻²]
Radiance	L	[W.m ⁻² .sr ⁻¹]

Table 2.1: Table summary of the radiometric quantities.

If we integrate incoming radiance over a hemisphere denoted as Ω in a given point x we get equation 2.4. Notice a $-\omega$ in the equation, this is caused by the fact that Ω usually refers to hemisphere consisting of outgoing solid angles. But when computing irradiance we are interested in the incoming radiance.

$$E(x) = \int_{\Omega} L(x, -\vec{\omega}) * \cos(\theta) d\vec{\omega} \quad (2.4)$$

To get flux from radiance, we will have to perform two integration steps. We will have to integrate radiance over a hemisphere in every differential surface, which belongs to the surface we are interested in. This is precisely written in the equation 2.5.

$$\phi = \int_A \int_{\Omega} L(x, \vec{\omega}) * \cos(\theta) d\vec{\omega} dA \quad (2.5)$$

[Dutre et al.(2001)Dutre, Heckbert, Ma, Pellacini, Porschka, Ramasubramanian, Soler, and War

¹The meaning of θ is $\cos(\theta) = (\vec{n} \cdot \vec{\omega})$, where \vec{n} is surface normal at a point of interest (x) and $\vec{\omega}$ is a direction vector we want to compute radiance for.

²Steradian is unit of a solid angle.

2.2 Surface interaction

Using ray optics model, light can interact with object in only four ways. It can be created by the object, which is referred as an emission. On the other way it can be partially or fully absorbed, reflected or refracted in the same time.

As was mentioned in the beginning of this chapter, it's almost impossible to simulate these light interactions in large scenes using light interaction on a molecular level. Currently the most used scene representation is probably an object boundary representation³. Unfortunately the microscopic structure of the object plays a huge role in the light interaction as can be seen on the fig (figure brushed metal and unbrushed metal) and would again result in an immense complexity if represented using triangles. To cope with this problem we usually model the coarse object shapes using the boundary representation and we call the microscopic behavior "the material behavior". To model the material behavior we use the BRDF function.

2.2.1 BRDF

The *bidirectional reflectance distribution function* describes what is the probability that an incoming light from a given incoming direction will reflect to a given outgoing direction from the given surface. As stated before we can define the BRDF function as:

$$f(\omega_i, x, \omega_o) = \frac{dL_o(x, \omega_o)}{dE(x, \omega_i)} = \frac{L(x, \omega_o)}{L_i(x, \omega_i) * \cos(\theta_i) d\omega_i} \quad (2.6)$$

To formulate the BRDF function more precisely we should define it's properties:

1. **Function domain:**

For a given surface point x the BRDF is four dimensional function. Two dimensions for the incoming direction and two for the outgoing direction.

2. **Value range:**

BRDF can gain any positive value. Using constant BRDF function we can model diffuse materials.

3. **Reciprocity:**

The BRDF value stays the same if we interchange incoming and outgoing direction.

³Consisting of a finite set of triangles, quadrangles and other n-gons.

This is a the very fundamental property many global illumination algorithms rely on. Thanks to this behavior we can gather or shoot light energy using the same BRDF functions and all light interactions remain the same.

4. Linearity:

It's a linear function, thus it is not dependent on irradiance from other directions. To get total reflected radiance in the given direction ω_o and given point we get an equation 2.7.

$$L_o(\vec{\omega}_o) = \int_{\Omega} L_i(\vec{\omega}_i) * f_r(\vec{\omega}_i, \vec{\omega}_o) * \cos(\theta) d\vec{\omega} \quad (2.7)$$

5. Energy conservation:

Total reflected energy to all directions is smaller or equal to the total irradiance in any given point. This ensures that an object can't reflect more light than it receives.

2.2.2 Rendering equation

We have successfully defined the quantities we want to compute and models we want to use for the light surface interaction. What we want to achieve is to distribute the light energy in the scene and compute the energy fraction which reaches our image pixels.

To describe the energetic equilibril state in the scene⁴ we use rendering equation 2.8. As you can see it closely resembles the equation 2.7. The main difference between these two equations is the fact that the unknown radiance⁵ is on both sides of the equation and that instead of the local radiance $L(x, \omega_o)$ we want to trace a ray in a direction ω_i to the scene and compute the radiance in closest ray surface intersection $L(r(x, \omega_i), -\omega_i)$.

$$L(x, \omega_o) = \int_{\Omega} L(r(x, \omega_i), -\omega_i) * f(\omega_i, x, \omega_o) * \cos(\theta_i) d\omega_i \quad (2.8)$$

$$L(x, \omega_o) = L_e(x, \omega_o) + \int_{\Omega} L(r(x, \omega_i), -\omega_i) * f(\omega_i, x, \omega_o) * \cos(\theta_i) d\omega_i \quad (2.9)$$

The equation 2.8 can deal with light reflection, refraction and absorption. To consider the light emitting objects in our scene we have to introduce an emitted radiance⁶ into

⁴This refers to the light distribution in the scene.

⁵Both $L(r(x, \omega_i), -\omega_i)$ and $L(x, \omega_o)$ are unknown.

⁶ $L_e(x, \omega_o)$

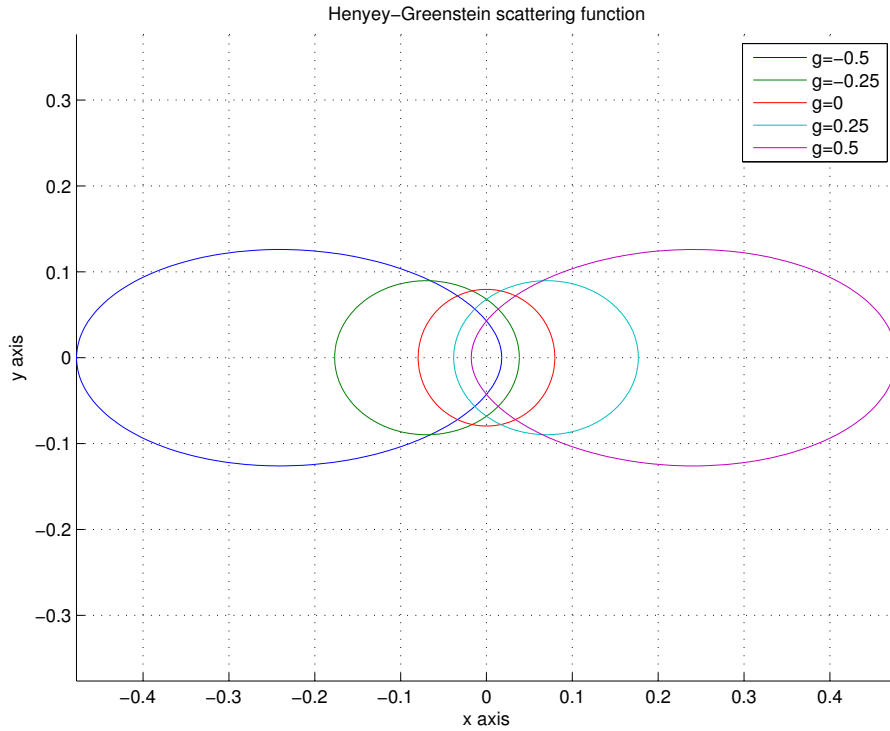


Figure 2.1: Plot of Henyey-Greenstein phase function with different g coefficients. For $g < 0$ the function represents backscattering media, for $g = 0$ isometric scattering and for $g > 0$ growing forward scattering tendencies.

the equation. Which result in eq 2.9 To get an actual image of our scene $L(x, \omega_o)$ has to be computed for every image pixel.

2.3 Volume interaction

To simulate volumetric phenomena correctly we have to consider not only the light surface interaction, but also light volume interaction.

2.3.1 Phase functions

-isotropic -anisotropic name hg,shlick aprox, reylight (atmosphere) -jak dochazi k rozptylu svetla -pouzit matlabcky obrazky heney-g funkce ruzne koeficienty

2.3.2 Rendering equation including participating media

hezké odvození je v -advanced illum techniques

What steps have to be taken to get rendering equation to the next level.

2.4 Volume and surface interaction

In order to properly simulate light transport in the scenes containing both surfaces and volumetrically active media.

Different light transport paths surface surface, surface media, media surface, media media.

2.4.1 Extended rendering equation

Put together all the integrals pokračovat v odvození z -advanced illum techniques

Chapter 3

Common solutions

In this chapter we will try to summarize the most common technics for solving the rendering equation in the presence of participating media.

3.1 Rasterization

Films -

krakatoa rendering engine

nvidia smoke particles demo pixar deep shadow maps [Lokovic and Veach(2000)]

Still most used in films and games - fast approximation. Particle rasterization + rendering slices of 3D volumes can solve only direct illumination.

3.2 Raytracing

Quasi Monte Carlo equation

$$\int_{I^S} f(x)dx \approx \frac{1}{N} \sum_{i=1}^N f(x_i),$$

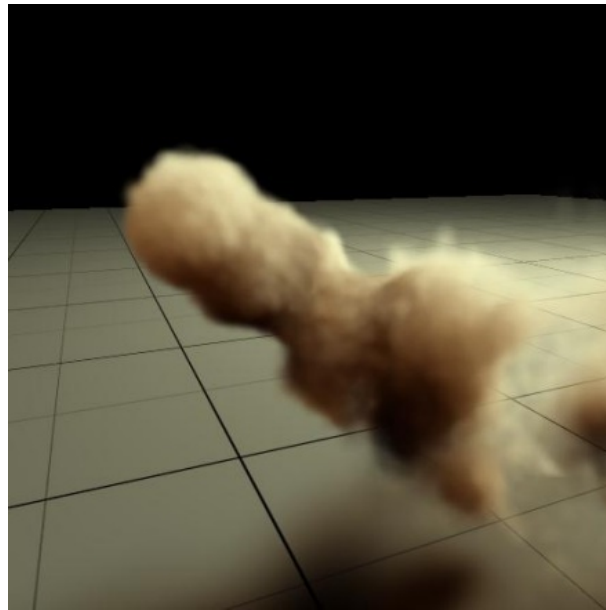


Figure 3.1: This image has been rendered using multiple shadow maps for direct illumination on gpu.

3.2.1 Raymarching volumes

More recently, another technique has become popular for sampling distances along a ray in an inhomogeneous medium. The idea comes from the neutron transport community in the 60s and has various names (delta tracking, pseudo-scattering); we'll call it Woodcock tracking in effort to promote original paper.

pbtr single scattering can support procedural volumes and any type of lighting

3.2.2 Unbiased methods

Plus and cons - very slow no caching recomputation of visibility factor

3.2.3 Biased methods

[Jarosz(2008)] irradiance caching, Photon tracing, final gather ... Plus and cons

Chapter 4

Consistent progressive methods

what does it mean to be progressive

4.1 Stochastic progressive photon mapping

[]

4.2 Beam mapping

[Jarosz et al.(2011)Jarosz, Nowrouzezahrai, Thomas, Sloan, and Zwicker] Hybrid solution
cpu gpu rasterization..

4.3 Virtual point lights

[Keller(1997)] [Hašan et al.(2009)Hašan, Křivánek, Walter, and Bala]

4.4 Virtual ray lights

[Novák et al.(2012b)Novák, Nowrouzezahrai, Dachsbacher, and Jarosz]

4.5 Virtual beam lights

[Novák et al.(2012a)Novák, Nowrouzezahrai, Dachsbacher, and Jarosz]

Chapter 5

Proposed solution

I have chosen these methods and why... How to do it scheme of the progressive raytracing renderer.

co tu ma byt pouzil jsem tuhle a tuhle metodu proc odkazat se na predchozi kapitolu a zminit zmeny ktere jsem provedl a proc.

Co jsem orezal co rozsiril.

A dojit k blokovemu schematu co budu muset imlementovat. Mozna zminit i PBRT.

Chapter 6

Implementation

6.1 Volume representation

both unified grid and procedural volume (multiple octaves of perlin noise)

I have decided to implement it using pbrt. what is pbrt what structures I will use, which I have to create.

6.2 Ground truth

light tracer - dual algorithm to path tracer. It is able to capture caustic effects. Maybe path tracer too??

V tehle kapitole muzu i ukazat ty veci z matlabu ze funguji a jak. Klidne popsat, i postup implemntace pres jednoduzsi az po slozitejsi metody.

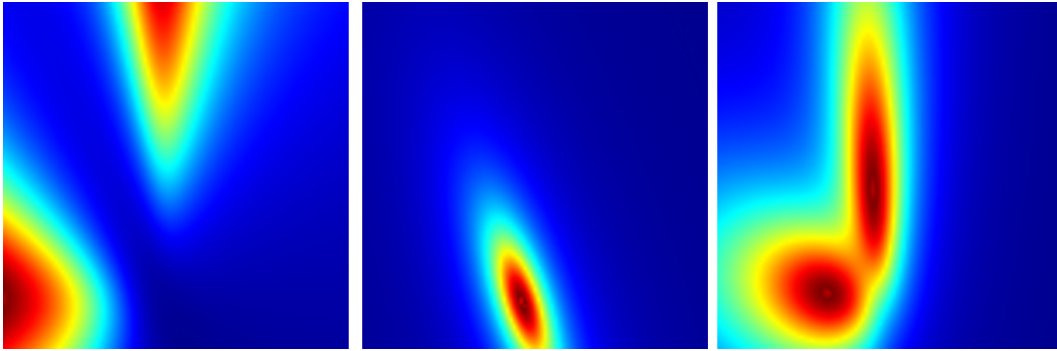


Figure 6.1: Different functions have been evaluated in discrete point pairs (from 0 to 1 parametric range) on two randomly placed rays.

On the left image only contribution using ray moderately forward scattering ($g=0.75$) Heney-Greenstein phase functions has been evaluated. In the middle inverse squared contribution and on the right contribution using both phase function and inverse squared distance.

Chapter 7

Results

Mely by tu byt tabulky a srovnani metod a ruzne parametry.

Chapter 8

Conclusion

this method was implemented and results are great

8.0.1 Future work

Bibliography

- [Dutre et al.(2001)]Dutre, Heckbert, Ma, Pellacini, Porschka, Ramasubramanian, Soler, and Ward] Philip Dutre, Paul Heckbert, Vincent Ma, Fabio Pellacini, Robert Porschka, Mahesh Ramasubramanian, Cyril Soler, and Greg Ward. Global illumination compendium, 2001.
- [Hašan et al.(2009)]Hašan, Křivánek, Walter, and Bala] Miloš Hašan, Jaroslav Křivánek, Bruce Walter, and Kavita Bala. Virtual spherical lights for many-light rendering of glossy scenes. *ACM Trans. Graph.*, 28(5):143:1–143:6, December 2009. ISSN 0730-0301. doi: 10.1145/1618452.1618489. URL <http://doi.acm.org/10.1145/1618452.1618489>.
- [Jarosz(2008)] Wojciech Jarosz. *Efficient Monte Carlo Methods for Light Transport in Scattering Media*. PhD thesis, UC San Diego, September 2008.
- [Jarosz et al.(2011)]Jarosz, Nowrouzezahrai, Thomas, Sloan, and Zwicker] Wojciech Jarosz, Derek Nowrouzezahrai, Robert Thomas, Peter-Pike Sloan, and Matthias Zwicker. Progressive photon beams. *ACM Transactions on Graphics (Proceedings of ACM SIGGRAPH Asia 2011)*, 30(6), December 2011.
- [Keller(1997)] Alexander Keller. Instant radiosity, 1997.
- [Lokovic and Veach(2000)] Tom Lokovic and Eric Veach. Deep shadow maps. In *Proceedings of the 27th annual conference on Computer graphics and interactive techniques*, SIGGRAPH '00, pages 385–392, New York, NY, USA, 2000. ACM Press/Addison-Wesley Publishing Co. ISBN 1-58113-208-5. doi: 10.1145/344779.344958. URL <http://dx.doi.org/10.1145/344779.344958>.
- [Novák et al.(2012a)]Novák, Nowrouzezahrai, Dachsbacher, and Jarosz] Jan Novák, Derek Nowrouzezahrai, Carsten Dachsbacher, and Wojciech Jarosz. Progressive

virtual beam lights. *Computer Graphics Forum (Proceedings of EGSR 2012)*, 31(4), June 2012a.

[Novák et al.(2012b)Novák, Nowrouzezahrai, Dachsbacher, and Jarosz] Jan Novák, Derek Nowrouzezahrai, Carsten Dachsbacher, and Wojciech Jarosz. Virtual ray lights for rendering scenes with participating media. *ACM Transactions on Graphics (Proceedings of ACM SIGGRAPH 2012)*, 31(4), July 2012b.

Appendinx A

Appendix

abbreviations + test scene images

Appendinx B

DVD Content

galerie obrazku test scen