

裕太微电子
Motorcomm

裕太微电子

YT8531(D)H / YT8531(D)C/

YT8531P

数据表

集成10/100/1000千兆以太网收发器

版本 V1.00 日期 2
022-02-14

裕太微电子 | 摩托通讯

版权声明

本文档版权归芯谷科技有限公司（Motorcomm）所有，保留所有权利。
未经矽昌通信技术（上海）有限公司书面同意，任何公司或个人不得以任何形式复制、传播、披露或向第三方分发本文件任何内容。若发生上述行为，矽昌通信技术（上海）有限公司有权追究其法律责任。

免责声明

本文档仅提供定期信息，其内容将/可能根据Motorcomm产品的实际情形不时更新，不再另行通知。
对于因不当使用本文档而导致的任何直接或间接损失，Motorcomm概不承担任何责任。

Confidential

修订历史

Revision	Release Date	Summary
V1.00	2022/02/14	First version.

Confidential

内容

1. General Description.....	1
1.1. 目标应用	1
1.2. 应用图 - YT8531H/YT8531C	2
1.3. 应用框图 - YT8531DH/YT8531DC	2
1.4. 应用图 - YT8531P	2
2. 特性	3
3. 引脚分配	5
3.1. Y T8531(D)(P) QFN40	5
3.2. 引脚分配	6
3.3. 收发器接口	7
3.4. 时钟	7
3.5. RGMII	7
3.6. 复位	8
3.7. 模式选择	8
3.8. LED默认设置	8
3.9. 稳压器与参考源	9
3.10. 电源相关	9
3.11. 管理接口	9
4. 功能描述	11
4.1. UTP<->RGMII应用	11
4.2. 发送功能	11
4.2.1. 发送编码器模式	11
4.3. 接收功能	11
4.3.1. 接收解码器模式	11
4.4. LRE100-4	12
4.5. 回声消除器	12
4.6. 近端串扰消除器	12
4.7. 基线漂移消除器	12
4.8. 数字自适应均衡器	12
4.9. 管理接口	12
4.10. 自动协商	12
4.11. LDS (链路发现信令)	13
4.11.1. 检测与自动校正	13
4.12. 极性检测	13
4.12.1. 环回模式	13
4.12.1.1. 数字环回	13
4.12.1.2. 外部环回	13
4.12.1.3. 远端PHY环回	14
4.13. 节能以太网 (EEE)	14
4.14. 同步以太网 (Sync-E)	14
4.15. 网络唤醒 (WOL)	14
4.16. 链路断开省电 (睡眠模式)	15
4.17. 中断	15
5. 操作描述	16
5.1. 复位	16
5.2. PHY地址	16
5.3. RGMII接口	16
5.4. LED	17
5.5. INT_N/PME_N引脚用法	17
5.6. 电源供电	17
5.6.1. 核心电源内部开关稳压器	17
5.6.2. 核心电源内部低压差线性稳压器	17
5.6.3. RGMII IO 内部低压差线性稳压器	17
6. 寄存器概述	19
6.1. 通用寄存器	19
6.1.1. 芯片配置 (EXT_0xA001)	19
6.1.2. RGMII配置1 (EXT_0xA003)	19

6.1.3. RGMII_配置2 (EXT_0xA004)	20
6.1.4. MDIO配置与RGMII_OOB监控 (EXT_0xA005)	20
6.1.5. 杂项配置 (EXT_0xA006)	21
6.1.6. MAC地址配置1 (EXT_0xA007)	21
6.1.7. MAC地址配置2 (EXT_0xA008)	21
6.1.8. MAC地址配置3 (EXT_0xA009)	21
6.1.9. 网络唤醒配置 (EXT_0xA00A)	21
6.1.10. LED通用配置 (EXT_0xA00B)	22
6.1.11. LED0配置 (EXT_0xA00C)	22
6.1.12. LED1配置 (EXT_0xA00D)	23
6.1.13. LED2配置 (EXT_0xA00E)	24
6.1.14. LED闪烁配置 (EXT_0xA00F)	24
6.1.15. 引脚驱动强度配置 (EXT_0xA010)	25
6.1.16. SyncE配置 (EXT_0xA012)	25
6.2. UTP MII寄存器	26
6.2.1. 基本控制寄存器 (0x00)	26
6.2.2. 基本状态寄存器 (0x01)	26
6.2.3. PHY标识寄存器1 (0x02)	28
6.2.4. PHY标识寄存器2 (0x03)	28
6.2.5. 自动协商通告寄存器 (0x04)	28
6.2.6. 自动协商链路伙伴能力寄存器 (0x05)	30
6.2.7. 自动协商扩展寄存器 (0x06)	31
6.2.8. 自动协商NEXT页寄存器 (0x07)	31
6.2.9. 自动协商链路伙伴接收NEXT页寄存器 (0x08)	32
6.2.10. 主从控制寄存器 (0x09)	32
6.2.11. 主从状态寄存器 (0x0A)	34
6.2.12. MMD访问控制寄存器 (0x0D)	34
6.2.13. MMD访问数据寄存器 (0x0E)	35
6.2.14. 扩展状态寄存器 (0x0F)	35
6.2.15. PHY特殊功能控制寄存器 (0x10)	35
6.2.16. PHY特殊状态寄存器 (0x11)	36
6.2.17. 中断掩码寄存器 (0x12)	37
6.2.18. 中断状态寄存器 (0x13)	37
6.2.19. 速率自动降级控制寄存器 (0x14)	38
6.2.20. 接收错误计数器寄存器 (0x15)	38
6.2.21. 扩展寄存器地址偏移寄存器 (0x1E)	38
6.2.22. 扩展寄存器数据寄存器 (0x1F)	39
6.3. UTP MMD寄存器	39
6.3.1. PCS控制1寄存器 (MMD3, 0x0)	39
6.3.2. PCS状态1寄存器 (MMD3, 0x1)	39
6.3.3. EEE控制与能力寄存器 (MMD3, 0x14)	39
6.3.4. EE唤醒错误计数器 (MMD3, 0x16)	40
6.3.5. 本地设备EEE支持能力 (MMD7, 0x3C)	40
6.3.6. 链路伙伴EEE支持能力 (MMD7, 0x3D)	40
6.4. YT8531D/YT8531P的UTP LDS寄存器	40
6.4.1. LRE控制 (0x00)	40
6.4.2. LRE状态 (0x01)	41
6.4.3. PHY ID寄存器1 (0x02)	41
6.4.4. PHY ID寄存器2 (0x03)	41
6.4.5. LDS自动协商通告能力 (0x04)	42
6.4.6. LDS链路伙伴能力 (0x07)	42
6.4.7. LDS扩展 (0x0A)	42
6.4.8. LDS结果 (0x0B)	43
6.5. UTP扩展寄存器	43
6.5.1. Pkgen 配置1 (EXT_0x38)	43
6.5.2. Pkgen 配置2 (0x39)	43
6.5.3. Pkgen 配置3 (EXT_0x3A)	44
6.5.4. Pkgen 配置4 (0x3B)	44

6.5.5. 包配置0 (EXT_0xA0)	44
6.5.6. 包配置1 (EXT_0xA1)	45
6.5.7. 包配置2 (EXT_0xA2)	45
6.5.8. 包接收有效0 (EXT_0xA3)	45
6.5.9. 包接收有效1 (EXT_0xA4)	45
6.5.10. 包接收操作系统0 (EXT_0xA5)	45
..... 45 6.5.11. 包接收操作系统1 (EXT_0xA6)	46
..... 46 6.5.12. 包接收用户空间0 (EXT_0xA7)	46
..... 46 6.5.13. 包接收用户空间1 (EXT_0xA8)	46
..... 46 6.5.14. 包接收错误 (EXT_0xA9)	46
..... 46 6.5.15. 包接收操作系统异常 (EXT_0xAA)	46
..... 46 6.5.16. 包接收分片 (EXT_0xAB)	46
..... 46 6.5.17. 包接收无SFD (EXT_0xAC)	46
..... 46 6.5.18. 包发送有效0 (EXT_0xAD)	47
..... 47 6.5.19. 包发送有效1 (EXT_0xAE)	47
..... 47 6.5.20. 包发送操作系统0 (EXT_0xAF)	47
..... 47 6.5.21. 包发送操作系统1 (EXT_0xB0)	47
..... 47 6.5.22. 包发送用户空间0 (EXT_0xB1)	47
..... 47 6.5.23. 包发送用户空间1 (EXT_0xB2)	47
..... 47 6.5.24. 包发送错误 (EXT_0xB3)	48
..... 48 6.5.25. 包发送操作系统异常 (EXT_0xB4)	48
..... 48 6.5.26. 包发送分片 (EXT_0xB5)	48
..... 48 6.5.27. 包发送无SFD (EXT_0xB6)	48
7. 时序和交/直流特性	49
7.1. 直流特性	49
7.2. 交流特性	49
7.2.1. 无延迟RGMII时序	49
7.2.2. 带内部延迟的RGMII时序	50
7.2.3. SMI (MDC/MDIO) 接口特性	50
7.3. 晶体要求	51
7.4. 振荡器/外部时钟要求	51
8. 电源要求	52
8.1. 绝对最大额定值	52
8.2. 推荐工作条件	52
8.3. 电源时序	52
8.4. 功耗	53
8.4.1. YT8531 功耗	53
8.4.2. YT8531D 功耗	53
8.4.3. YT8531P 功耗	53
8.5. 最大功耗	53
8.5.1. YT8531 最大功耗	54
8.5.2. YT8531D 最大功耗	54
8.5.3. YT8531P 最大功耗	54
8.6. 电源噪声	54
9. 热阻	55
10. 机械信息	56
11. 订购信息	57

表格列表

表1. 引脚分配	6	表收
发器接口	7	表时钟
.....	7	表RGMII
.....	7	表复位
.....	8	表模式选择
.....	8	表LED默认设置
.....	8	表稳压器与参考源
.....	9	表电源相关
.....	9	表. 管理
.....	9	表. 复位时序特性
.....	16	表. CFG_LDO[1:0]配置
.....	17	表. 寄存器访问类型
.....	19	表. 芯片配置 (0xA001)
表15. RGMII_配置1 (EXT_0xA003)	19	表
6. RGMII配置2 (0xA004)	20	表
17. MDIO配置与RGMII_OOB监控 (EXT_0xA005)	20	表. 杂
项配置 (EXT_0xA006)	21	表. MAC地
址配置1 (EXT_0xA007)	21	表. MAC地址配
置2 (EXT_0xA008)	21	表. MAC地址配置3 (E
XT_0xA009)	21	表. WOL配置 (EXT_0xA00A
)	21	表. LED通用配置 (EXT_0xA00
B)	22	表. LED0配置 (EXT_0xA00C)
.....	22	表. LED1配置 (EXT_0xA00D)
.....	23	表. LED2配置 (EXT_0xA00E)
.....	24	表. LED闪烁配置 (EXT_0xA00F)
.....	24	表. 焊盘驱动强度配置 (EXT_0xA010)
.....	25	表. 同步以太网配置 (EXT_0xA012)
.....	25	表. 基本控制寄存器 (0x00)
.....	26	表. 基本状态寄存器 (0x01)
.....	27	表. PHY标识寄存器1 (0x02)
.....	28	表. PHY标识寄存器2 (0x03)
表34. 自协商通告寄存器 (0x04)	28	表. 自协商
链路伙伴能力寄存器 (0x05)	30	表. 自协商扩展寄存
器 (0x06)	31	表. 自协商NEXT页寄存器 (0x07)
.....	31	表. 自协商链路伙伴接收NEXT页寄存器 (0x08)
.....	32	表. 主从控制寄存器 (0x09)
2 表. 主从状态寄存器 (0x0A)	34	表. MMD访问
控制寄存器 (0x0D)	34	表. MMD访问数据寄存
器 (0x0E)	35	表. 扩展状态寄存器 (0x0F)
.....	35	表. PHY专用功能控制寄存器 (0x10)
.....	35	表. PHY专用状态寄存器 (0x11)
.....	36	表. 中断掩码寄存器 (0x12)
.....	37	表. 中断状态寄存器 (0x13)
.....	37	表. 速率自动降级控制寄存器 (0x14)
... 38 表. 接收错误计数器寄存器 (0x15)	3	
8 表. 扩展寄存器地址偏移寄存器 (0x1E)	38	表. 扩展寄
存器数据寄存器 (0x1F)	39	表. PCS控制1寄存器
(MMD3, 0x0)	39	表. PCS状态1寄存器 (MMD
3, 0x1)	39	表. EEE控制与能力寄存器 (MMD
3, 0x14)	39	表. EEE唤醒错误计数器 (MMD3, 0x16)
.....	40	表. 本地设备EEE能力 (MMD7, 0x3C)
.....	40	

表57. 链路伙伴EEE能力 (MMD7, 0x3D)	40	表
. LRE控制寄存器 (0x00)	40	表
9. LRE状态寄存器 (0x01)	41	表
60. PHY ID寄存器1 (0x02)	41	
表61. PHY ID寄存器2 (0x03)	41	
表62. LDS自动协商通告能力 (0x04)	4	
2 表63. LDS链路伙伴能力 (0x07)		
42 表64. LDS扩展寄存器 (0x0A)		
. 42 表65. LDS结果寄存器 (0x0B)		
... 43 表66. 包生成配置1 (EXT_0x38)		
..... 43 表67. 包生成配置2 (EXT_0x39)		
..... 43 表68. 包生成配置3 (EXT_0x3A)		
..... 44 表69. 包生成配置4 (EXT_0x3B)		
..... 44 表70. 包配置0 (EXT_0xA0)		
..... 44 表71. 包配置1 (EXT_0xA1)		
..... 45 表72. 包配置2 (EXT_0xA2)		
..... 45 表73. 包接收有效0 (EXT_0xA3)		
..... 45 表74. 包接收有效1 (EXT_0xA4)		
..... 45 表75. 包接收过采样0 (EXT_0xA5)		
..... 45 表76. 包接收过采样1 (EXT_0xA6)		
..... 46 表77. 包接收欠采样0 (EXT_0xA7)		
..... 46 表78. 包接收欠采样1 (EXT_0xA8)		
..... 46 表79. 包接收错误 (EXT_0xA9)		
..... 46 表80. 包接收异常过采样 (EXT_0xAA)		
..... 46 表81. 包接收碎片 (EXT_0xAB)		
..... 46 表82. 包接收非SFD (EXT_0xAC)		
..... 46 表83. 包发送有效0 (EXT_0xAD)		
..... 47 表84. 包发送有效1 (EXT_0xAE)		
..... 47 表85. 包发送过采样0 (EXT_0xAF)		
..... 47 表86. 包发送过采样1 (EXT_0xB0)		
..... 47 表87. 包发送欠采样0 (EXT_0xB1)		
..... 47 表88. 包发送欠采样1 (EXT_0xB2)		
..... 47 表89. 包发送错误 (EXT_0xB3)		
..... 48 表90. 包发送异常过采样 (EXT_0xB4)		
..... 48 表91. 包发送碎片 (EXT_0xB5)		
..... 48 表92. 包发送非SFD (EXT_0xB6)		
..... 48 表93. 直流特性		
..... 49 表94. RGMII时序 (无延迟)		
..... 49 表95. RGMII时序 (内部延迟)		
..... 50 表96. SMI (MDC/MDIO) 接口特性		
..... 50 表97. 晶振要求		
..... 51 表98. 振荡器/外部时钟要求		
..... 51 表99. 绝对最大额定值		
..... 52 表100. 推荐工作条件		
..... 52 表101. 电源时序参数		
..... 52 表102. YT8531功耗		
..... 53 表103. YT8531D功耗		
..... 53 表104. YT8531P功耗		
..... 53 表105. YT8531最大功耗		
..... 53 表106. YT8531D最大功耗		
..... 54 表107. YT8531P最大功耗		
..... 54 表108. 热阻参数		
..... 55 表109. 机械尺寸		
..... 56 表110. 订购信息		
..... 57		

图目录

图1. 应用框图 - YT8531H/YT8531C	2	图应用框图 - YT8531P	2
图 - YT8531DH/YT8531DC	2	图功能框图	4
.....	4	图引脚分配图	5
.....	5	图UTP<->RGMII应用发送功能	11
.....	11	图数字环回模式	13
.....	13	图外部环回模式	14
.....	14	图远端PHY环回	14
图10. 复位时序图	16	图. RG	16
MII连接图	17	图. 无延迟RGMII	49
时序	49	图. 内置延迟RGMII时序	50
.....	50	图. SMI (MDC/MDIO) 时序	50
.....	50	图. 上电时序	52
.....	52		

1. 概述

YT8531H/YT8531C/YT8531DH/YT8531DC/YT8531P是一款高度集成的以太网收发器，符合10BASE-T_e、100BASE-TX和1000BASE-T IEEE 802.3标准。该器件提供所有必需的物理层负责通过CAT.5E UTP电缆传输和接收以太网数据包。

YT8531(D)(P)采用先进的DSP技术和模拟前端(AFE)，可实现高速通过UTP电缆实现数据传输与接收。YT8531(D)(P)集成了交叉检测与自动校正、极性校正、自适应均衡、串扰消除、回声消除、时序恢复及纠错等功能，可在10Mbps、100Mbps或1000Mbps速率下提供稳健的收发能力。

MAC与PHY之间的数据传输通过精简千兆介质独立接口(RGMII)实现，支持1000BASE-T、100BASE-TX和10BASE-T_e标准。YT8531(D)(P)支持多种RGMII信号电压，包括3.3V、2.5V和1.8V。


YT8531D/YT8531P采用裕太车通自主研发的LRE100-4技术，该技术可使设备在超五类双绞线上实现400米传输距离的100Mbps通信时，自动与符合LRE100-4标准的链路伙伴完成协商并建立连接。

1.1. 目标应用

数字电视 (DTV, Digital TV)

MAU (媒体接入单元) CNR (通信和网络插卡) 游戏机 打印机和
办公设备 DVD播放器与录像机 以太网集线器 以太网交换机 基站与
控制器 路由器、DSLAM、PON设备 测试与测量系统 工业与工厂自动
化设备 多媒体同步与实时网络 任何需UTP物理连接且配备以太网MAC的嵌
入式系统

1.2. 应用图 - YT8531H/YT8531C

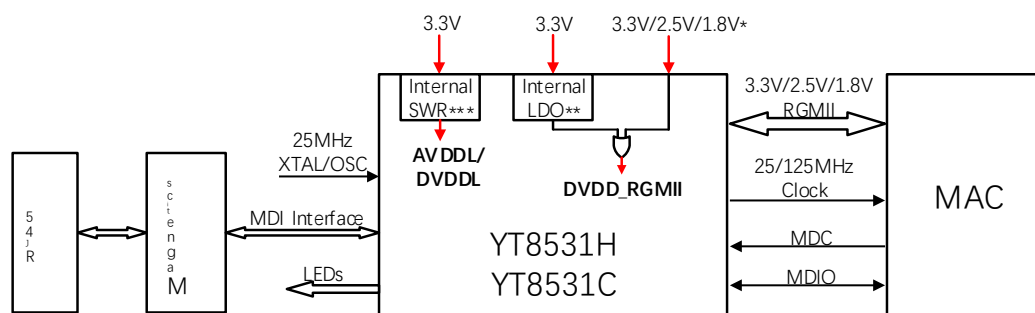


*Note: 3.3V/2.5V/1.8V power here means I/O power sourced from external power, not from the internal LDO.

**Note: I/O power only support 2.5V/1.8V when sourced from the internal LDO.

***Note: Internal SWR is for YT8531H/YT8531C.

图1. 应用图 - YT8531H/YT8531C

1.3. 应用框图 - YT8531DH/YT8531DC

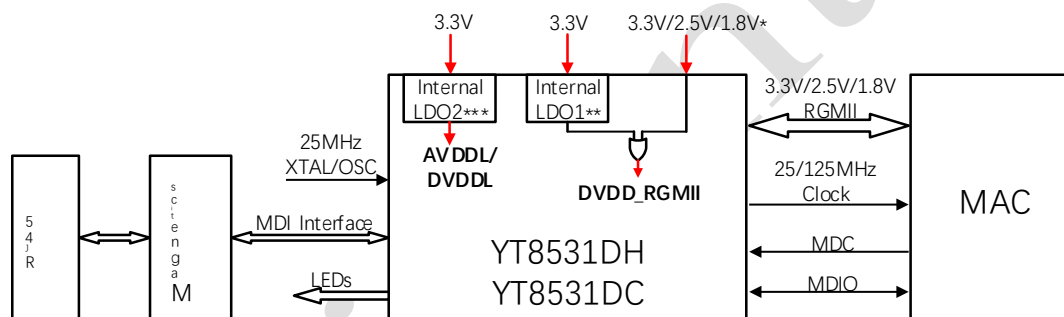


*Note: 3.3V/2.5V/1.8V power here means I/O power sourced from external power, not from the internal LDO.

**Note: I/O power only support 2.5V/1.8V when sourced from the internal LDO.

***Note: Internal LDO2 is for YT8531DH/YT8531DC.

图2. 应用图 - YT8531DH/YT8531DC

1.4. 应用框图 - YT8531P

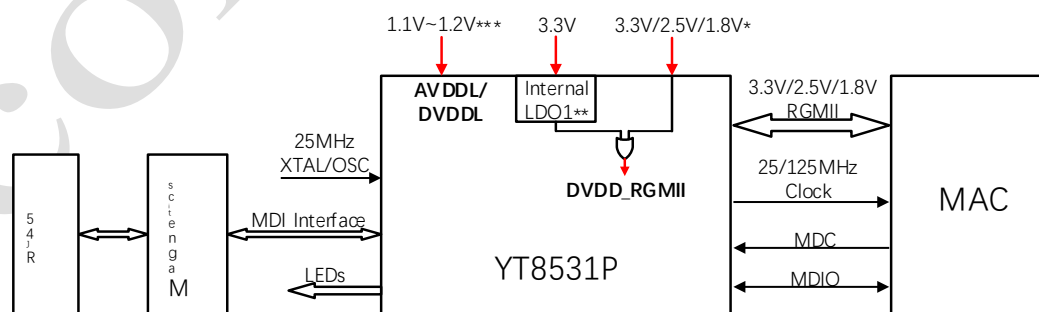

*Note: 3.3V/2.5V/1.8V power here means I/O power sourced from external power, not from the internal LDO.

**Note: I/O power only support 2.5V/1.8V when sourced from the internal LDO.

***Note: 1.1V~1.2V means core power sourced from external power for YT8531P.

图3. 应用图 - YT8531P

2. 功能

符合IEEE 802.3ab标准的1000BASE-T
符合IEEE 802.3u标准的100BASE-TX 符
合IEEE 802.3标准的10BASE-Te 支持YT8
531D/YT8531P的LRE100-4功能

•通过CAT.5E UTP电缆中的4对线实现长达400米的100Mbps速率长距离以太网 支持RGMII
支持IEEE 802.3az-2010（节能以太网） 支持同步以太网（Sync-E） 内置通过UTP的局域
网唤醒（WOL）功能 支持通过UTP的中断功能 支持并行检测 交叉检测与自动校正
自动极性校正 基线漂移校正 在1000BASE-T下支持CAT.5E电缆120米传输 RGMII可选3.
3V/2.5V/1.8V信号电平 支持25MHz外部晶体或OSC 为MAC提供25MHz/125MHz时钟源
提供3个网络状态LED指示灯 支持链路断开节能（睡眠模式） 内置开关稳压器或LDO
支持1000BASE-T和100BASE-TX的18k字节巨帧，以及10BASE-Te的10k字节巨帧 YT8531H和
YT8531DH采用工业级制造工艺 40引脚QFN绿色封装


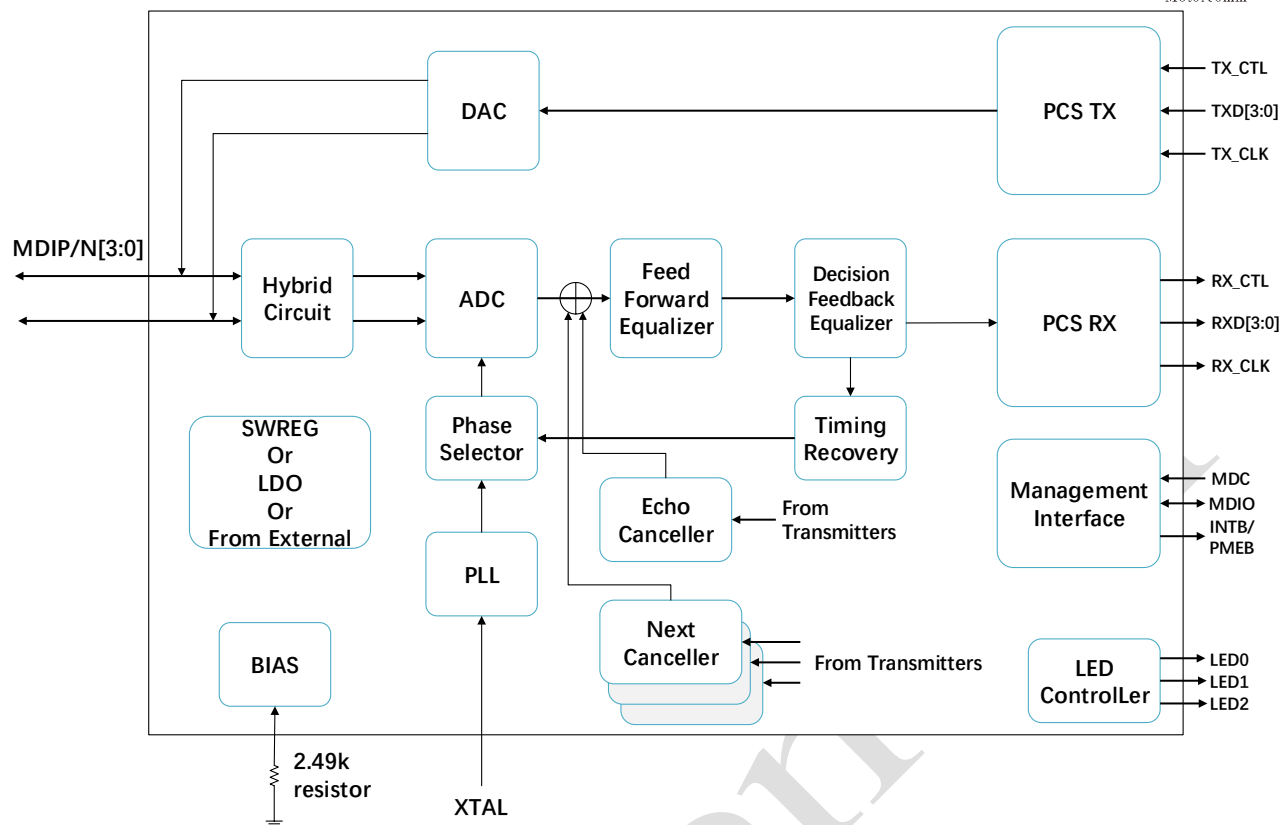


图4. 框图

3. Pin Assignment

3.1. YT8531(D)(P) QFN40

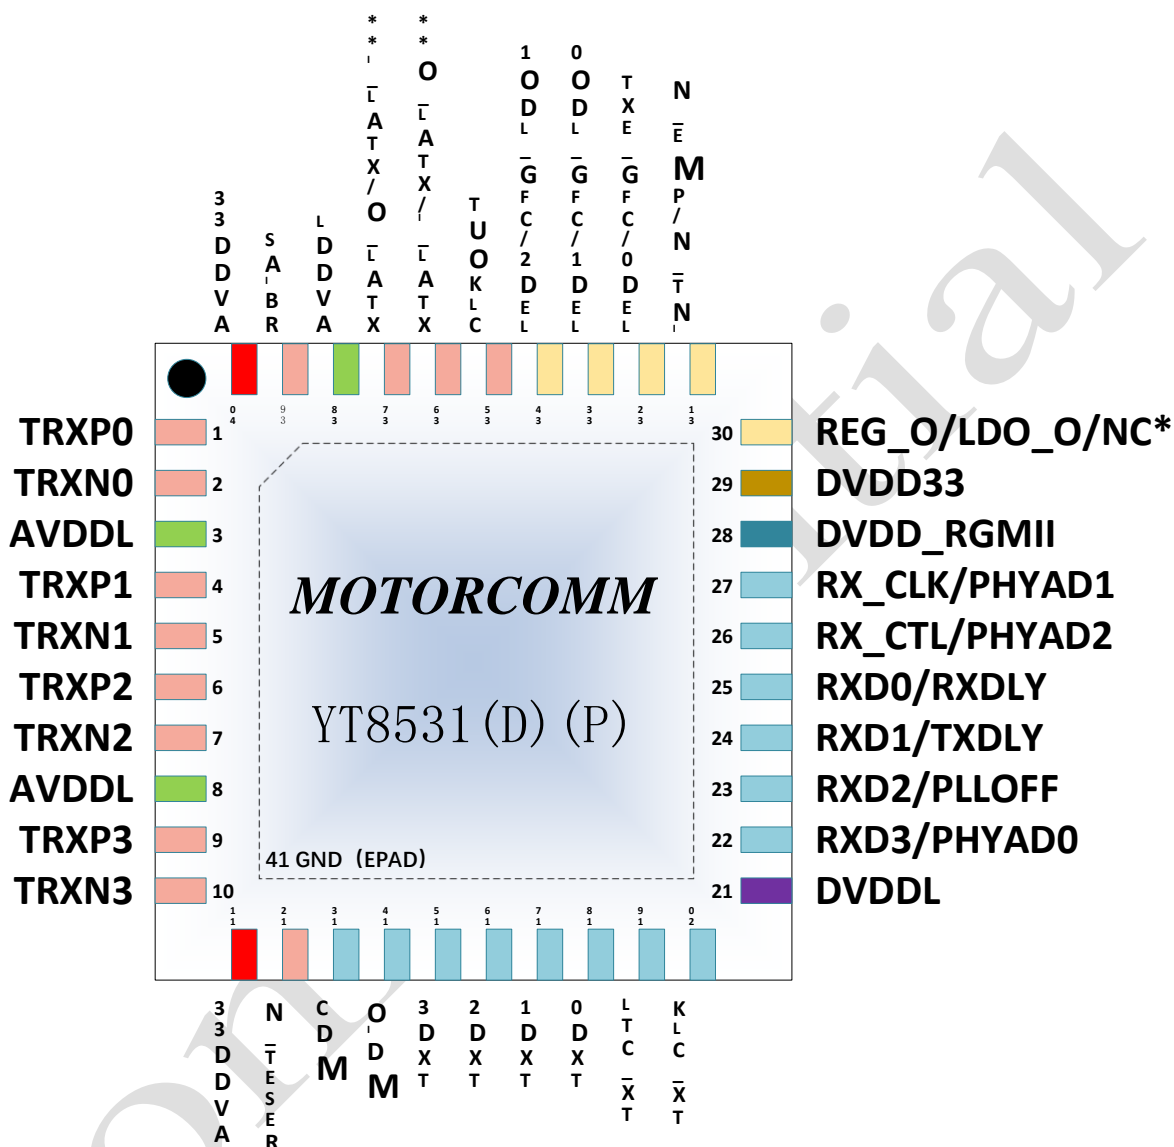

*Note:

For YT8531H/YT8531C, pin 30 is REG_O, which means switch regulator output.

For YT8531DH/YT8531DC, pin 30 is LDO_O, which means LDO output.

For YT8531P, pin 30 is NC, which means no connection.

**Note:

Pin 36 and 37 is related to package version. Please refer to ordering information to find more.

图5. 引脚分配图

3.2. 引脚分配

某些引脚具有多种功能。 请参阅引脚分配图以获取图形表示。

I: 输入 O: 输出 IO: 双向输入输出
 LI: 上电锁存输入 P: 电源
 PU: 内部上拉 PD: 内部下拉
 G: 地 OD: 开漏 XT: 晶体相关

表 1. 引脚分配

No.	Pin Name	Type
1	TRXP0	IO
2	TRXN0	IO
3	AVDDL	P
4	TRXP1	IO
5	TRXN1	IO
6	TRXP2	IO
7	TRXN2	IO
8	AVDDL	P
9	TRXP3	IO
10	TRXN3	IO
11	AVDD33	P
12	RESET_N	I/PU
13	MDC	I/PD
14	MDIO	IO/PU
15	TXD3	I/PD
16	TXD2	I/PD
17	TXD1	I/PD
18	TXD0	I/PD
19	TX_CTL	I/PD
20	TX_CLK	I/PD

No.	Pin Name	Type
21	DVDDL	P
22	RXD3/PHYAD0	O/LI/PD
23	RXD2/PLLOFF	O/LI/PD
24	RXD1/TXDLY	O/LI/PD
25	RXD0/RXDLY	O/LI/PU
26	RX_CTL/PHYAD2	O/LI/PD
27	RX_CLK/PHYAD1	O/LI/PD
28	DVDD_RGMII	P
29	DVDD33	P
30	REG_O/LDO_O/NC	P
31	INT_N/PME_N	O/OD
32	LED0/CFG_EXT	O/LI/PU
33	LED1/CFG_LDO0	O/LI/PU
34	LED2/CFG_LDO1	O/LI/PD
35	CLKOUT	O
36	XTAL_I/ XTAL_O	XT
37	XTAL_O/ XTAL_I	XT
38	AVDDL	P
39	RBIAS	O
40	AVDD33	P
41	GND	G

3.3. 收发器接口

表 2. 收发器接口

No.	Pin Name	Type	Description
1	TRXP0	IO	Media-dependent interface 0, 100Ω transmission line
2	TRXN0	IO	Media-dependent interface 0, 100Ω transmission line
4	TRXP1	IO	Media-dependent interface 1, 100Ω transmission line
5	TRXN1	IO	Media-dependent interface 1, 100Ω transmission line
6	TRXP2	IO	Media-dependent interface 2, 100Ω transmission line
7	TRXN2	IO	Media-dependent interface 2, 100Ω transmission line
9	TRXP3	IO	Media-dependent interface 3, 100Ω transmission line
10	TRXN3	IO	Media-dependent interface 3, 100Ω transmission line

3.4. 时钟

表3. 时钟

No.	Pin Name	Type	Description
35	CLKOUT	O	1. Reference Clock Generated from Internal PLL. This pin should be kept floating if the clock is not used by the MAC. 2. UTP recovery receive clock for Sync Ethernet. 3. 25MHz reference clock.
36	XTAL_I/ XTAL_O	XT	For package version A, this pin is XTAL_I, means 25MHz Crystal Input pin. But is XTAL_O for package version B, means 25MHz Crystal Output pin. If use external oscillator or clock from another device. 1. When connect an external 25MHz oscillator or clock from another device to XTAL_O pin, XTAL_I must be shorted to GND. 2. When connect an external 25MHz oscillator or clock from another device to XTAL_I pin, keep the XTAL_O floating.
37	XTAL_O/ XTAL_I	XT	For package version A, this pin is XTAL_O, means 25MHz Crystal Output pin. But is XTAL_I for package version B, means 25MHz Crystal Input pin. If use external oscillator or clock from another device. 1. When connect an external 25MHz oscillator or clock from another device to XTAL_O pin, XTAL_I must be shorted to GND. 2. When connect an external 25MHz oscillator or clock from another device to XTAL_I pin, keep the XTAL_O floating.

3.5. 精简吉比特媒体独立接口

表4. RGMII

No.	Pin Name	Type	Description
15	TXD3	I/PD	Transmit Data. Data is transmitted from MAC to PHY via TXD[3:0].
16	TXD2	I/PD	
17	TXD1	I/PD	
18	TXD0	I/PD	
19	TX_CTL	I/PD	Transmit Control Signal from the MAC.
20	TX_CLK	I/PD	The transmit reference clock will be 125Mhz, 25MHz, or 2.5MHz depending on speed.
22	RXD3	O/LI/PD	Receive Data.

23	RXD2	O/LI/PD	Data is transmitted from PHY to MAC via RXD[3:0].
24	RXD1	O/LI/PD	
25	RXD0	O/LI/PU	
26	RX_CTL	O/LI/PD	Receive Control Signal to the MAC.
27	RX_CLK	O/LI/PD	The continuous receive reference clock will be 125MHz, 25MHz, or 2.5MHz, and is derived from the received data stream.

3.6. 重置

表5. 重置

No.	Pin Name	Type	Description
12	RESET_N	I/PU	Hardware reset, active low. Requires an external pull-up resistor

3.7. 模式选择

表6. 模式选择

No.	Name	Type	Description
22	PHYAD0	O/LI/PD	PHYAD[2:0]. PHY address configuration.
27	PHYAD1	O/LI/PD	
26	PHYAD2	O/LI/PD	
23	PLLOFF	O/LI/PD	In sleep mode, PLL off configuration.
24	TXDLY	O/LI/PD	RGMII Transmit clock timing control. Pull up to add delay to TXC for TXD latching.
25	RXDLY	O/LI/PU	RGMII receiver clock timing control Pull-up to add 2ns delay on RX_CLK when RX_CLK is 125MHz or, to add 8ns delay on RX_CLK when RX_CLK is 25MHz/2.5MHz, which shall be used to latch RXD.
32	CFG_EXT	O/LI/PU	I/O Pad. External Power Source Mode Configuration. Pull up to use the external power source for the I/O pad. Pull down to use the integrated LDO to transform the desired voltage for the I/O pad.
33	CFG_LDO0	O/LI/PU	CFG_LDO[1:0]. When pulling down CFG_EXT pin, CFG_LDO[1:0] represent internal LDO output voltage setting for I/O pad: 2'b00: Reserved 2'b01: 2.5V 2'b10 or 2'b11: 1.8V
34	CFG_LDO1	O/LI/PD	When pulling up CFG_EXT pin, CFG_LDO[1:0] stand for input voltage selection of external power for I/O pad: 2'b00: 3.3V 2'b01: 2.5V 2'b10 or 2'b11: 1.8V

3.8. LED 默认设置

表7. LED默认设置

No.	Pin Name	Type	Description
-----	----------	------	-------------

32	LED0	O/LI/PU	Light = Link up at 10Mbps Blinking = Transiting or Receiving
33	LED1	O/LI/PU	Light = Link up at 100Mbps Blinking = Transiting or Receiving
34	LED2	O/LI/PD	Light = Link up at 1000Mbps Blinking = Transiting or Receiving

3.9. 调节器与基准源

表8. 调节器与参考源

No.	Pin Name	Type	Description
39	RBIAS	O	Bias Resistor. An external 2.49 kΩ±1% resistor must be connected between the RBIAS pin and GND
30	REG_O	P/O	Switch regulator 1.1V output. Connect to an external 2.2 uH power inductor directly. Only for YT8531H/YT8531C.
	LDO_O	P/O	Low-dropout regulator 1.1V output. Only for YT8531DH/YT8531DC.
	NC	-	No connection. Only for YT8531P.

3.10. 功率相关

表 9. 功率相关

No.	Pin Name	Type	Description
29	DVDD33	P	3.3V Power Digital non-RGMII I/O power
28	DVDD_RGMII	P	Digital RGMII I/O, MDC/MDIO power, adjusted by CFG_EXT and CFG_LDO[1:0]. <i>Note: When CFG_EXT = 0 and CFG_LDO[1:0] = 2b'01 or 2b'10 or 2b'11, the I/O pad power is supplied from the internal LDO. Otherwise, it is supplied from the external power connected to DVDD_RGMII pin. No matter whether the I/O pad power form external or internal, a bulk capacitor and a decoupling capacitor should be connected to this pin.</i>
21	DVDDL	P	Digital power 1.1V/1.2V
11, 40	AVDD33	P	Analog Power 3.3V
3, 8, 38	AVDDL	P	Analog power 1.1V/1.2V
41	GND	G	Exposed PAD

3.11. 管理

表10. 管理

No.	Pin Name	Type	Description
13	MDC	I/PD	Management Data Clock.
14	MDIO	IO/PU	Input/Output of Management Data. Pull up 3.3V/2.5V/1.8V for 3.3V/2.5V/1.8V I/O respectively
31	INT_N/PME_N	O/OD	This pin is shared by two functions, the default pin setting is INT_N. Keep this pin floating if either of the functions is not used. The pin type

			<p>depends on function selected:</p> <ol style="list-style-type: none"> 1. Interrupt (should be 3.3V pulled up). Set low if the specified events occurred; active low. 2. Power Management Event (should be 3.3V pulled up). Set low if received a magic packet; active low. <p><i>Note 1: The behavior of INT_N is level-triggered, the behavior of PME_N is level-triggered or pulse-triggered which is controlled by EXT 0xA00A bit[0].</i></p> <p><i>Note 2: The function of INT_N/PME_N can be assigned by Ext 0xA00a bit[6].</i></p> <p><i>1: Pin 31 functions as PME_N.</i></p> <p><i>0: Pin 31 functions as INT_N (default).</i></p>
--	--	--	--

4. 功能描述

4.1. UTP<->RGMII 应用

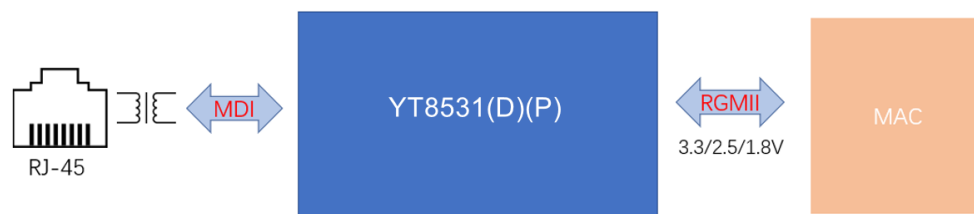


图6. UTP<->RGMII应用发送功能

4.2. 传递函数

4.2.1. 发送编码器模式

4.2.1.1. 1000BASE-T

在1000BASE-T模式下，YT8531(D)(P)会对来自MAC接口的发送数据字节进行加扰，将其转换为9位符号，并通过四对CAT.5E UTP电缆将其编码为4D五级PAM信号。

4.2.1.2. 100BASE-TX

在100BASE-TX模式下，来自MII的4位数据经过4B/5B序列化、加扰处理，最终编码为由PMA发送的三电平MLT3序列。

4.2.1.3. 10BASE-Te

在10BASE-Te模式下，YT8531(D)(P) {v*}通过曼彻斯特编码方式发送和接收数据。

4.3. 接收函数

4.3.1. 接收解码器模式

4.3.1.1. 1000BASE-T

在1000BASE-T模式下，PMA在考虑四对双绞线的电缆条件（如线对间偏移、线对交换顺序及极性）后恢复4D PAM信号。生成的代码组被解码为8位数据值，数据流定界符经适当转换后，数据最终输出至MAC接口。

4.3.1.2. 100BASE-TX

在100BASE-TX模式下，接收数据流经过恢复和解扰以对齐到符号边界。对齐后的数据随后被并行化并进行5B/4B解码，转换为4位数据。在数据流定界符被转换后，该输出传输至MAC接口。

4.3.1.3. 10BASE-Te

在10BASE-Te模式下，恢复的10BASE-Te信号从曼彻斯特解码后进行对齐。

4.4. LRE100-4

YT8531D/YT8531P支持Motorcomm专有特性LRE100-4，通过CAT.5E UTP电缆中的4对线实现长达400米、100Mbps速率的长距离以太网应用。

4.5. 回声消除器

每对线路上均采用混合电路来实现同时收发。若发射器与线路未完全匹配，信号会反射回来形成回声。其他连接器或电缆缺陷（例如配线架不连续以及双绞线电缆阻抗变化）也会导致接收信号的信噪比{v*}急剧下降。YT8531(D)(P)器件内置数字回声消除器以调整回声，并能自适应补偿不同信道条件的变化。

4.6. 近端串扰消除器

1000BASE-T物理层使用全部四对双绞线传输数据。由于四对双绞线被捆绑在一起，线束中相邻线对之间会产生显著的高频串扰。YT8531(D)(P)器件在每个接收通道上采用三个并行的近端串扰消除器来消除高频串扰。该器件通过从均衡器输出中减去这些信号的估计值{v*}来实现近端串扰消除。

Translated Text

4.7. 基线漂移消除器

基线漂移由以太网链路与收发器的交流耦合以及交流耦合所引起。维持电压水平的时间超过短时。因此，传输的脉冲会发生畸变，导致受影响脉冲的采样值出现错误。由于收发信号中存在直流基线偏移，基线漂移在1000BASE-T环境中比100BASE-TX更为严重。YT8531(D)(P)器件采用先进的基线漂移消除电路，可持续监测并补偿这种效应，最大限度降低直流基线偏移对整体误码率的影响。

最优传输

4.8. 数字自适应均衡器

数字自适应均衡器用于消除接收端的符号间干扰。该数字自适应均衡器从ADC输出端接收非均衡信号，并采用前馈均衡器(FFE)和判决反馈均衡器(DFE)的组合方案，以实现最佳优化的信噪比{SNR}。

4.9. 管理接口

该设备的状态和控制寄存器可通过 MDIO 和 MDC 串行接口进行访问。该管理接口的功能和电气特性符合 IEEE 802.3 第 22 节的规定，同时支持 MDC 时钟速率最高 12.5 MHz。

4.10. 自动协商

YT8531(D)(P)通过铜介质采用符合IEEE 802.3第28条款的自动协商机制确定其工作模式。自动协商支持通过比较自身能力与链路伙伴接收到的能力，自动选择操作模式。通告的能力包括：

速度：10/100/1000Mbps 双工模式：全
双工和/或半双工

自动协商在以下场景发生时被初始化：

上电/硬件/软件复位 自动协商重启
从断电到上电的转换 链路断开

YT8531(D)(P)的自动协商功能默认启用，可通过软件控制禁用。

4.11. LDS（链路发现信令）

YT8531D/YT8531P 支持长距离以太网 (LRE)，由于延长电缆距离会衰减自动协商链路脉冲，因此采用链路发现信令 (LDS) 而非自动协商。LDS 是一种扩展距离的信令方案和协议，用于：

主/从分配 估算电缆长度 确认线对编号和线
对连接顺序 选择最高通用操作模式

符合IEEE标准的PHY会忽略LDS信号，因为根据IEEE802.3第14条款其频率低于2MHz。若链路对端是IEEE传统以太网PHY，YT8531D/YT8531P可检测标准NLP、FLP或MLT-3空闲信号，随后将LDS模式切换至第28条款自动协商模式。该设备也支持强制指定线对数量和速率模式，但链路两端必须进行相同强制设置。默认情况下LDS功能处于禁用状态，在使用此功能前应启用该特性。

4.12. 极性检测与自动校正

YT8531(D)(P) 可检测并纠正两类电缆错误：UTP电缆内的线对交换（线对0与线对1之间的交换，和（或）线对2与线对3之间的交换）以及线对内导线的交换。

4.13. 环回模式

YT8531(D)(P) 拥有三种环回模式

4.13.1. 数字环回

数字环回提供通过YT8531(D)(P)中的数字电路将发送数据环回到接收器的能力。

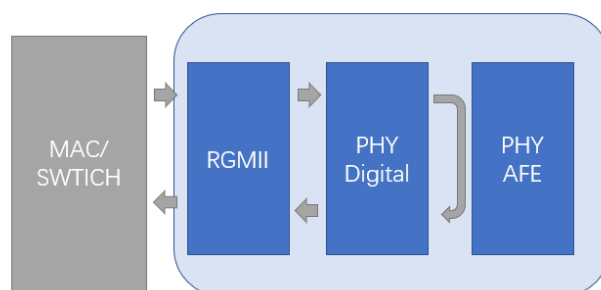


图7. 数字环回

4.13.2. 外部环回

外部电缆环回通过完整的数字和模拟路径及外部电缆将Tx信号环回到Rx，从而测试所有数字数据路径和所有模拟电路。图显示了外部电缆环回的框图。

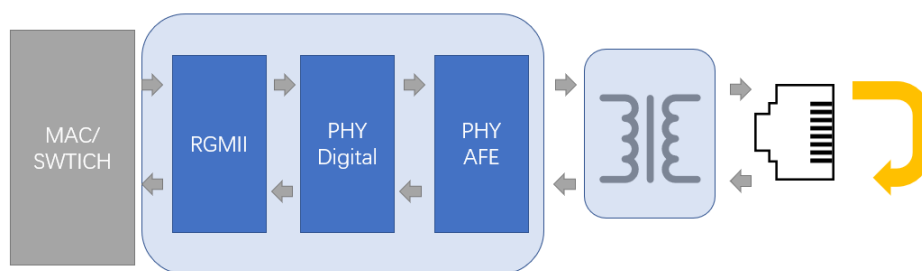


图 8. 外部环回

4.13.3. 远端PHY环回

远端环回将MDI接收路径连接到MDI发送路径，靠近RGMII接口，从而远程链路伙伴可以检测到所形成的环路的连接性。下图展示了远端环回的路径。

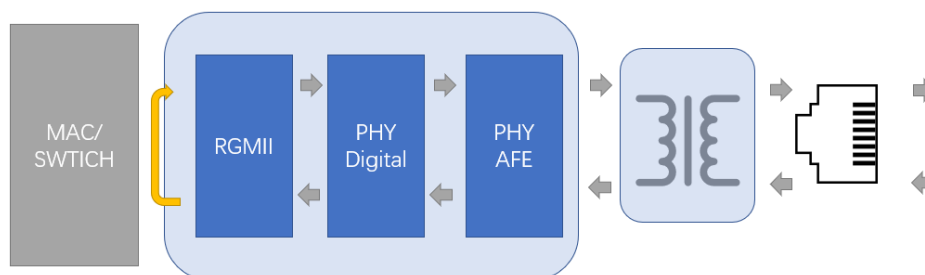


图 9. 远端PHY环回

4.14. 节能以太网 (EEE)

EEE是IEEE 802.3az标准，作为IEEE 802.3标准的扩展。EEE定义了物理层（PHY）在低功耗空闲（LPI）模式下运行的支持机制，启用后可在链路利用率较低时维持QUIET时段，使双方链路伙伴能够禁用各自PHY的部分电路以节省功耗。

4.15. 同步以太网（Sync-E）

YT8531(D)(P)在传输介质上工作于1000BASE-T、100BASE-TX、1000BASE-X和100BASE-FX模式时，提供同步以太网（Sync-E）支持。CLKOUT引脚可配置为输出恢复时钟信号。

Sync-E的恢复时钟可以是125MHz或25MHz时钟。如果CLKOUT引脚被配置为输出PHY恢复的时钟且PHY工作于1000BASE-T模式时，当PHY处于SLAVE模式，CLKOUT将输出从MDI恢复的时钟；若设备处于MASTER模式，CLKOUT将输出基于本地自由运行PLL生成的时钟。

4.16. 网络唤醒（WOL）

远程唤醒（WOL）是一种用于管理和调节网络总功耗的机制。

YT8531(D)(P)支持通过专用硬件中断引脚自动检测特定帧并发出通知。该特定帧包含位于数据包内任意位置的特定数据序列，该序列由6个连续1字节(0xFFFFFFFF)及紧随其后的16次被唤醒计算机MAC地址重复组成。48位MAC地址可通过MAC_Address_Cfg1~3公共寄存器进行设置。

4.17. 链路断开省电（睡眠模式）

YT8531(D)(P)支持链路断开省电功能，也称为睡眠模式。当UTP端口链路断开且40秒内无信号传输时，YT8531(D)(P)将进入睡眠模式。在睡眠模式下，YT8531(D)(P)会禁用除晶振时钟和10BASE-T_e通道0/1比较器外的几乎所有电路。MDC/MDIO接口仍可访问。在睡眠模式下，YT8531(D)(P)会定期唤醒并通过TRXP1/TRXN1发送信号。该时间间隔

间隔是一个约2.7秒{v*}的随机值。

一旦检测到UTP电缆上的信号，YT8531(D)(P)将退出睡眠模式。

4.18. 中断

YT8531(D)(P) 提供了一个低电平有效的中断输出引脚(INT_N)，该引脚基于PHY状态的变化。每个中断条件由只读通用中断状态寄存器（第6.2.18节。中断状态）表示。

寄存器（UTP MII寄存器0x13）。通过置位或清除中断使能寄存器中的位（章节6.2.17. 中断屏蔽寄存器（UTP MII寄存器0x12）），可独立启用或禁用各中断。

Note 1: The interrupt of the YT8531(D)(P) is a level-triggered mechanism.

Note 2: The INT_N and PME_N functions share the same pin (pin 31). Refer to section 5.5. INT_N/PME_N Pin Usage.

5. 操作说明

5.1. 重置

YT8531(D)(P) 具有低电平有效的硬件复位引脚(RESET_N)。为确保所有内部逻辑复位至已知状态, RESET_N应至少保持有效10ms。硬件复位应在电源上电后执行。RESET_N同时用于上电配置, 当RESET_N释放后, YT8531(D)(P)将锁存配置引脚上的输入值作为配置信息, 无需通过MDIO访问即可实现应用灵活性。

YT8531(D)(P)还提供了一个软件复位控制寄存器, 通过设置UTP mii寄存器(地址0x0)的第15位, 可复位除部分mdio配置寄存器外的所有UTP内部逻辑。该位在复位完成后会自动清除。有关软件复位会复位哪些寄存器的详细信息, 请参阅寄存器表。

YT8531D/YT8531P 还具备另一个软件复位控制寄存器, 通过设置 LDS mii 寄存器(地址 0x0)的第 15 位, 其效果与上文所述的 UTP mii 寄存器的第 15 位相同。

表 11. 复位时序特性

Symbol	Description	Min	Typ	Max	Units
T1	The duration from all powers steady to reset signal release to high	10	-	-	ms
T2	The duration of reset signal remain low timing	10	-	-	ms

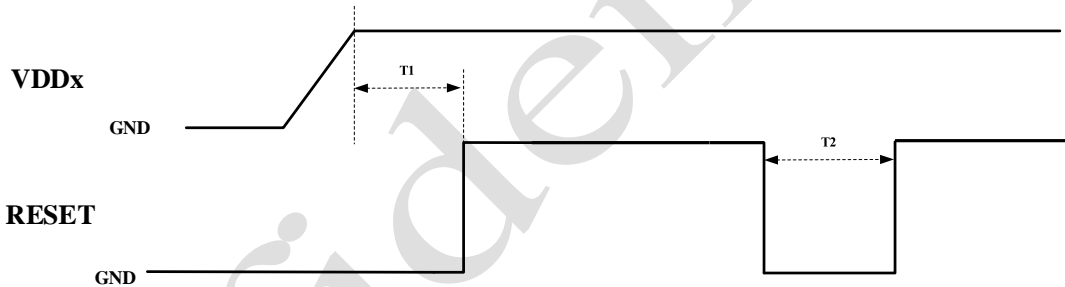


图 10. 复位时序图

5.2. PHY地址

对于YT8531(D)(P), 配置PHYAD[2:0]用于生成phy地址。

YT8531(D)(P)始终响应物理地址0。可通过配置扩展寄存器(地址0xa005)的bit[6]为1'b0来禁用该功能。该器件还具备另一个可通过mdio配置的广播物理地址, 扩展寄存器(地址0xa005)的bit[4:0]为广播物理地址配置位, 默认值为5'b11111。扩展寄存器(地址0xa005)的bit[5]为广播物理地址使能控制位, 默认值为1'b0。

5.3. RGMII 接口

精简千兆介质无关接口是GMII的子集, 用于千兆以太网传输。在100M/10M应用场景中, RGMII与MII接口类似。唯一区别在于tx_er/rx_er信号通过TX_CTL/RX_CTL在时钟下降沿进行传输。TXD[3:0]和RXD[3:0]数据信号将在时钟的上升沿和下降沿均会重复传输。

对于100M应用, TX_CLK和RX_CLK为25MHz。

在10M应用中, TX_CLK和RX_CLK的频率为2.5MHz。

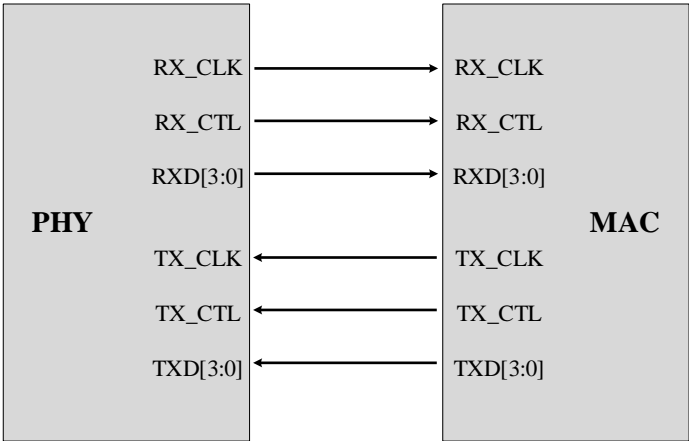


图11. RGMII连接图

5.4. LED

LED接口可由PHY控制或手动控制，且独立于PHY状态。提供三个状态LED，可用于指示运行速度、双工模式和链路状态。LED可编程为不同于默认值的各种状态功能，也可通过寄存器接口直接控制。

5.5. INT_N/PME_N 引脚用途

INT_N/PME_N引脚（引脚31）设计用于通知中断和网络唤醒(WOL)事件。该引脚的默认模式为INT_N（Ext_0xa00a寄存器，bit[6]=0）。在常规使用中，网络唤醒事件的指示功能被集成到中断事件机制中——当任何指定的WOL事件发生时即触发中断。但需注意，在此模式下不支持"脉冲低电平"波形格式，仅提供"低电平有效"的电平触发波形。

如果选择PME_N模式（Ext_0xa00a，bit[6]=1），引脚31将变为功能完整的PME_N引脚。注意在此模式下中断功能将被禁用。

5.6. 电源

YT8531(D)设备仅需一个外部电源：3.3V。芯片内部包含3.3V电源轨、1.1V电源轨、2.5V或1.8V电源轨。
YT8531P器件需要两个外部电源：3.3V和1.1V~1.2V。

5.6.1. 核心电源内部开关稳压器

YT8531集成了一款开关稳压器，可将3.3V{v*}高效转换为1.1V{v*}，为核心电源轨供电。也可选择使用外部稳压器来提供该核心电压。

5.6.2. 核心电源内部低压差线性稳压器

YT8531D集成了一颗将3.3V转换为1.1V的LDO，可选择使用外部稳压器来提供该核心电压。

5.6.3. 用于RGMII IO的内部LDO

YT8531(D)(P)还集成了一颗可将3.3V转换为2.5V或1.8V的LDO，用于RGMII I/O电源轨，并通过CFG_LDO[1:0]进行配置。

表12. CFG_LDO[1:0]配置

Configuration	Description
2'b01	LDO is set to 2.5V
2'b10 or 2'b11	LDO is set to 1.8V

2'b00	Use external 3.3V to supply to DVDD_RGMII pin. LDO is disabled
-------	---

Confidential

6. Register Overview

表13. 寄存器访问类型

Type	Description
RW	Read and write
SC	Self-clear. If default value is '0' ('1'), writing a '1' ('0') to this register field causes the function to be activated immediately, and then the field will be automatically cleared to '0' ('1').
RO	Read only.
LH	Latch high.
LL	Latch Low.
RC	Read clear.
SWC	Software reset to 0.
SWS	Software reset to 1.
POS	Default value depends on power on strapping.

6.1. 通用寄存器

6.1.1. 芯片配置 (EXT_0xA001)

表14. chip cfg (0xA001)

Bit	Symbol	Access	Default	Description
15	Sw_rst_n_mode	RW SC	0x1	chip mode change reset, low active, self clear
14:12	Reserved	RW	0x0	Reserved
11	Iddq_mode	RW	0x0	Iddq test mode
10	Reserved	RO	0x0	Reserved
9	En_gate_rx_clk_rgmii	RW	0x0	1=to close RXC when PHY link down; 0=do not close RXC when PHY link down.
8	Rxc_dly_en	RW POS	0x1	rgmii clk 2ns delay control, depend on strapping
7	Reserved	RO	0x0	Reserved
6	En_ldo	RW	0x1	rgmii ldo enable, default is 0 and will be set to 1 after power strapping is done
5:4	Cfg_ldo	RW	0x0	Rgmii ldo voltage and RGMII/MDC/MDIO PAD's level shifter control. Depends on strapping. 2'b11: 1.8v 2'b10: 1.8v 2'b01: 2.5v 2'b00: 3.3v
3:0	Reserved	RO	0x0	Reserved

6.1.2. RGMII_配置1 (EXT_0xA003)

表15. RGMII_配置1 (EXT_0xA003)

Bit	Symbol	Access	Default	Description
15	Reserved	RW	0x0	Reserved
14	Tx_clk_sel	RW	0x0	0: use original RGMII TX_CLK to drive the RGMII TX_CLK delay train;

				1: use inverted RGMII TX_CLK to drive the RGMII TX_CLK delay train. Used for debug
13:10	Rx_delay_sel	RW	0x0	RGMII RX_CLK delay train configuration, about 150ps per step
9	En_rgmii_fd_crs	RW	0x0	See EXT 0xA003 bit[8].
8	En_rgmii_crs	RW	0x0	0: to not encode GMII/MII CRS into RGMII OOB; 1: to encode GMII/MII CRS into RGMII OOB when it's half duplex mode or EXT 0xA003 bit[9] is 1.
7:4	Tx_delay_sel_fe	RW	0xf	RGMII TX_CLK delay train configuration when speed is 100Mbps or 10Mbps, it's 150ps per step typically.
3:0	Tx_delay_sel	RW	0x1	RGMII TX_CLK delay train configuration when speed is 1000Mbps, it's 150ps per step typically.

6.1.3. RGMII_配置2 (EXT_0xA004)

表 16. rgmii 配置2 (0xA004)

Bit	Symbol	Access	Default	Description
15:14	Speed_rgphy	RO	0x0	RGMII's speed information when it works as RGMII PHY. It's also the source of RGMII OOB.
13	Duplex_rgphy	RO	0x0	RGMII's duplex information when it works as RGMII PHY. It's also the source of RGMII OOB.
12	Link_up_rgphy	RO	0x0	RGMII's linkup information when it works as RGMII PHY. It's also the source of RGMII OOB.
11:10	Pause_rgphy	RO	0x0	RGMII's pause information when it works as RGMII PHY.
9	Eee_cap_rgphy	RO	0x0	RGMII's EEE capability information when it works as RGMII PHY.
8	Eee_clkstp_cap_rgphy	RO	0x0	RGMII's EEE clock stopable capability information when it works as RGMII PHY.
7:0	Reserved	RO	0x0	Reserved

6.1.4. MDIO配置与RGMII带外监控 (EXT_0xA005)

表17. MDIO配置与RGMII带外监控 (EXT_0xA005)

Bit	Symbol	Access	Default	Description
15:11	Reserved	RO	0x0	Reserved
10	Bypass_mdio_watchdog	RW	0x0	bypass mdio watch dog
9:8	Reserved	RO	0x0	Reserved
7	En_mdc_la	RW	0x1	enable mdc latch for read data
6	En_phyaddr0	RW	0x1	1: to always respond to MDIO command whose PHYAD field is 0; 0: to only respond to MDIO command whose PHYAD field equals to PHY address strapping.
5	En_bdcst_addr	RW	0x0	enable broadcast address

4:0	Bdcast_addr	RW	0x0	broadcast address
-----	-------------	----	-----	-------------------

6.1.5. 杂项配置 (EXT_0xA006)

表18. 杂项配置 (EXT_0xA006)

Bit	Symbol	Access	Default	Description
15:8	Reserved	RW	0x0	Reserved
7	Jumbo_enable	RW	0x0	enable jumbo frame
6	Reserved	RW	0x0	Reserved
5	Rem_lpbk_phy	RW	0x0	set remote loopback for UTP
4	Uldata_rloopback	RW	0x0	1=remain upload data when rem lpbk is set for phy
3	Bp_gmii_fatal_rst	RW	0x1	bypass gmii fifo overflow and underflow rst
2:0	Reserved	RW	0x5	Reserved

6.1.6. MAC地址配置1 (EXT_0xA007)

表19. MAC_Address_Cfg1 (EXT_0xA007)

Bit	Symbol	Access	Default	Description
15:0	mac_addr_loc_47_32	RW	0x0	highest 16 bits of MAC address used for WOL

6.1.7. MAC地址配置2 (EXT_0xA008)

表20. MAC地址配置2 (EXT_0xA008)

Bit	Symbol	Access	Default	Description
15:0	mac_addr_loc_31_16	RW	0x0	middle 16 bits of MAC address used for WOL

6.1.8. MAC地址配置3 (EXT_0xA009)

表 21. MAC_Address_Cfg3 (EXT_0xA009)

Bit	Symbol	Access	Default	Description
15:0	mac_addr_loc_15_0	RW	0x0	lowest 16 bits of MAC address used for WOL

6.1.9. WOL配置 (EXT_0xA00A)

表22. WOL配置 (EXT_0xA00A)

Bit	Symbol	Access	Default	Description
15:8	Reserved	RO	0x0	Reserved
7	Sw_close_rgmii	RW	0x0	1.disable rgmii interface 0.enable rgmii interface
6	Pmeb_intb_sel	RW	0x0	1: Pin 31 functions as PME_N. 0: Pin 31 functions as INT_N.
5:4	Reserved	RW	0x0	Reserved
3	Wol_en	RW	0x0	enable WOL.
2:0	Wol_lth_sel	RW	0x2	wol_lth_sel[0], 1: PME_N is level triggerd and active LOW; When PME_N is LOW, EXT 0xA00A bit3 wol_en should be set to 0 to clear the PME_N. 0: PME_N is pulse triggered and active LOW,

				the pusel width is controlled by wol_lth_sel[2:1]. Wol_lth_sel[2:1]: 00: 84ms; 01: 168ms; 10: 336ms; 11: 672ms.
--	--	--	--	--

6.1.10. LED通用配置 (EXT_0xA00B)

Table 23. LED_GENERAL_CFG (EXT_0xA00B)

Bit	Symbol	Access	Default	Description
15	Col_blk_sel	RW	0x1	1 = when collision happens, and related LEDn cfg (n is 0/1/2) register's bit3 led_col_blk_en is 1, LED blink at Blink Mode2; 0 = when collision happens, and related LEDn cfg (n is 0/1/2) register's bit3 led_col_blk_en is 0, LED blink at Blink Mode1. LED could blinks at different frequency in Blink Mode1 and Blink Mode2. Refer to EXT A00F[3:0] for the Blink Mode2 and Blink Mode1.
14	Jabber_led_dis	RW	0x1	1 = when 10Mb/s Jabber happens, LED will not blink;
13	Lpbk_led_dis	RW	0x1	1 = In internal loopback mode, LED will not blink;
12	Dis_led_an_try	RW	0x0	1: LED will be ON when auto-negotiation is at LINK_GOOD_CHECK status, in which status, the link is not up already.
11:9	Reserved	RO	0x0	Reserved
8	Led_2_force_en	RW	0x0	1 = enable LED2 force mode.
7:6	Led_2_force_mode	RW	0x0	Valid when bit8 is set. 00: force LED OFF; 01: force LED ON; 10: force LED Blink at Blink Mode1; 11: force LED Blink at Blink Mode2. LED could blinks at different frequency in Blink Mode1 and Blink Mode2. Refer to EXT A00F[3:0] for the Blink Mode2 and Blink Mode1.
5	Led_1_force_en	RW	0x0	1 = enable LED1 force mode.
4:3	Led_1_force_mode	RW	0x0	Valid when bit5 is set. Refer EXT A00B[7:6] for the force mode description.
2	Led_0_force_en	RW	0x0	1 = enable LED0 force mode.
1:0	Led_0_force_mode	RW	0x0	Valid when bit2 is set. Refer EXT A00B[7:6] for the force mode description.

6.1.11. LED0_CFG (EXT_0xA00C)

表24. LED0配置 (EXT_0xA00C)

Bit	Symbol	Access	Default	Description
-----	--------	--------	---------	-------------

15:14	Reserved	RW	0x0	Reserved
13	Led_act_blk_ind_0	RW	0x0	When traffic is present, make LED0 BLINK no matter the previous LED0 status is ON or OFF, or make LED0 blink only when the previous LED0 is ON.
12	Led_fdx_on_en_0	RW	0x0	1: If BLINK status is not activated, when PHY link up and duplex mode is full duplex, LED0 will be ON.
11	Led_hdx_on_en_0	RW	0x0	1: If BLINK status is not activated, when PHY link up and duplex mode is half duplex, LED0 will be ON.
10	Led_txact_blk_en_0	RW	0x1	1: If bit[13] is 1, or bit[13] is 0 and ON at certain speed or duplex more is/are activated, when PHY link up and TX is active, make LED0 blink at mode2.
9	Led_rxact_blk_en_0	RW	0x1	1: If bit[13] is 1, or bit[13] is 0 and ON at certain speed or duplex more is/are activated, when PHY link up and RX is active, make LED0 blink at mode2.
8	Led_txact_on_en_0	RW	0x0	1: if BLINK status is not activated, when PHY link up and TX is active, make LED0 ON at least 10ms.
7	Led_rxact_on_en_0	RW	0x0	1: if BLINK status is not activated, when PHY link up and RX is active, make LED0 ON at least 10ms.
6	Led_gt_on_en_0	RW	0x0	1: if BLINK status is not activated, when PHY link up and speed mode is 1000Mbps, make LED0 ON.
5	Led_ht_on_en_0	RW	0x0	1: if BLINK status is not activated, when PHY link up and speed mode is 100Mbps, make LED0 ON;
4	Led_bt_on_en_0	RW	0x1	1: if BLINK status is not activated, when PHY link up and speed mode is 10Mbps, make LED0 ON;
3	Led_col_blk_en_0	RW	0x0	1: if PHY link up and collision happen, make LED0 BLINK;
2	Led_gt_blk_en_0	RW	0x0	1: if PHY link up and speed mode is 1000Mbps, make LED0 BLINK;
1	Led_ht_blk_en_0	RW	0x0	1: if PHY link up and speed mode is 100Mbps, make LED0 BLINK;
0	Led_bt_blk_en_0	RW	0x0	1: if PHY link up and speed mode is 10Mbps, make LED0 BLINK;

6.1.12. LED1_CFG (EXT_0xA00D)

表 25. LED1_CFG (EXT_0xA00D)

Bit	Symbol	Access	Default	Description
15:14	Reserved	RW	0x0	Reserved
13	Led_act_blk_ind_1	RW	0x0	Same logic as LED0 control.
12	Led_fdx_on_en_1	RW	0x0	Same logic as LED0 control.
11	Led_hdx_on_en_1	RW	0x0	Same logic as LED0 control.
10	Led_txact_blk_en_1	RW	0x1	Same logic as LED0 control.
9	Led_rxact_blk_en_1	RW	0x1	Same logic as LED0 control.

8	Led_txact_on_en_1	RW	0x0	Same logic as LED0 control.
7	Led_rxact_on_en_1	RW	0x0	Same logic as LED0 control.
6	Led_gt_on_en_1	RW	0x0	Same logic as LED0 control.
5	Led_ht_on_en_1	RW	0x1	Same logic as LED0 control.
4	Led_bt_on_en_1	RW	0x0	Same logic as LED0 control.
3	Led_col_blk_en_1	RW	0x0	Same logic as LED0 control.
2	Led_gt_blk_en_1	RW	0x0	Same logic as LED0 control.
1	Led_ht_blk_en_1	RW	0x0	Same logic as LED0 control.
0	Led_bt_blk_en_1	RW	0x0	Same logic as LED0 control.

6.1.13. LED2配置 (EXT_0xA00E)

表 26. LED2_CFG (EXT_0xA00E)

Bit	Symbol	Access	Default	Description
15:14	Reserved	RW	0x0	Reserved
13	Led_act_blk_ind_2	RW	0x0	Same logic as LED0 control.
12	Led_fdx_on_en_2	RW	0x0	Same logic as LED0 control.
11	Led_hdx_on_en_2	RW	0x0	Same logic as LED0 control.
10	Led_txact_blk_en_2	RW	0x1	Same logic as LED0 control.
9	Led_rxact_blk_en_2	RW	0x1	Same logic as LED0 control.
8	Led_txact_on_en_2	RW	0x0	Same logic as LED0 control.
7	Led_rxact_on_en_2	RW	0x0	Same logic as LED0 control.
6	Led_gt_on_en_2	RW	0x1	Same logic as LED0 control.
5	Led_ht_on_en_2	RW	0x0	Same logic as LED0 control.
4	Led_bt_on_en_2	RW	0x0	Same logic as LED0 control.
3	Led_col_blk_en_2	RW	0x0	Same logic as LED0 control.
2	Led_gt_blk_en_2	RW	0x0	Same logic as LED0 control.
1	Led_ht_blk_en_2	RW	0x0	Same logic as LED0 control.
0	Led_bt_blk_en_2	RW	0x0	Same logic as LED0 control.

6.1.14. LED_BLINK_CFG (EXT_0xA00F)

表27. LED_BLINK_CFG (EXT_0xA00F)

Bit	Symbol	Access	Default	Description
15:7	Reserved	RO	0x0	Reserved
6:4	Led_duty	RW	0x0	Select duty cycle of Blink: 000: 50% ON and 50% OFF; 001: 67% ON and 33% OFF; 010: 75% ON and 25% OFF; 011: 83% ON and 17% OFF; 100: 50% ON and 50% OFF; 101: 33% ON and 67% OFF; 110: 25% ON and 75% OFF; 111: 17% ON and 83% OFF.
3:2	Freq_sel_2	RW	0x1	Select frequency of Blink Mode2: 00: 2Hz; 01: 4Hz; 10: 8Hz; 11: 16Hz.
1:0	Freq_sel_1	RW	0x2	Select frequency of Blink Mode1:

				00: 2Hz; 01: 4Hz; 10: 8Hz; 11: 16Hz.
--	--	--	--	---

6.1.15. 焊盘驱动强度配置 (EXT_0xA010)

表28. Pad驱动强度配置 (EXT_0xA010)

Bit	Symbol	Access	Default	Description
15:13	Rgmii_sw_dr_rxc	RW	0x3	Drive strenght of rx_clk pad. 3'b111: strongest; 3'b000: weakest.
12	Rgmii_sw_dr[2]	RW	0x0	Bit 2 of Rgmii_sw_dr[2:0], refer to ext A010 [5:4]
11	Int_od_en	RW	0x1	1'b1: Interupt pin acts as a open drain pad 1'b0: Interupt pin acts as a normal output pad
10	Int_act_hi	RW	0x0	1'b1: Interupt acts as high active 1'b0: interupt acts as low active
9:8	Dr_sync_e	RW	0x3	Drive strenght of SyncE pad. 2'b11: strongest; 2'b00: weakest
7:6	Dr_mdio	RW	0x3	Drive strenght of mdio pad. 2'b11: strongest; 2'b00: weakest
5:4	Rgmii_sw_dr[1:0]	RW POS	0x3	Bit 1 and 0 of Rgmii_sw_dr, Drive strenght of rxd/rx_ctl rgmii pad. 3'b111: strongest; 3'b000: weakest
3:2	Dr_int_io	RW	0x3	Drive strenght of interrupt pad. 2'b11: strongest; 2'b00: weakest
1:0	Dr_led	RW	0x3	Drive strenght of led pad. 2'b11: strongest; 2'b00: weakest

6.1.16. 同步以太网配置 (EXT_0xA012)

表29. SyncE_CFG (EXT_0xA012)

Bit	Symbol	Access	Default	Description
15:8	Reserved	RO	0x0	Reserved
7	Reserved	RW	0x1	Reserved
6	En_sync_e	RW	0x1	enable sync e clock output
5	En_sync_e_during_Inkdn	RW	0x0	always output sync e clock even when link is down
4	Clk_fre_sel	RW	0x0	1'b1: output 125m clock; 1'b0: output 25m clock
3:1	Clk_src_sel	RW	0x4	select clock source of sync e. 3'b000: internal 125MHz PLL output clock 3'b001: UTP recovered RX clock (when {en_adc_1, en_adc_0}==2'b10, output adc1; ==2'b01 or 2'b11 output adc0 clock, else disable output) 3'b010: Reserved. 3'b011: clock from digital (RGMII TX delayed clock, or debug clock out) 3'b100: reference 25MHz clock (default) 3'b101: 25MHz SSC.

				Source of 3'b000 and 3'b001 can be controlled by clk_fre_sel.
0	Reserved	RO	0x0	Reserved

6.2. UTP MII 寄存器

6.2.1. Basic Control Register (0x00)

Table 30. Basic Control Register (0x00)

Bit	Symbol	Access	Default	Description
15	Reset	RW SC	0x0	PHY Software Reset. Writing 1 to this bit causes immediate PHY reset. Once the operation is done, this bit is cleared automatically. 0: Normal operation 1: PHY reset
14	Loopback	RW SWC	0x0	Internal loopback control 1'b0: disable loopback 1'b1: enable loopback
13	Speed_Selection(LSB)	RW	0x0	LSB of speed_selection[1:0]. Link speed can be selected via either the Auto-Negotiation process, or manual speed selection speed_selection[1:0]. Speed_selection[1:0] is valid when Auto-Negotiation is disabled by clearing bit 0.12 to zero. Bit6 bit13 1 1 = Reserved 1 0 = 1000Mb/s 0 1 = 100Mb/s 0 0 = 10Mb/s
12	Autoneg_En	RW	0x1	1: to enable auto-negotiation; 0: auto-negotiation is disabled.
11	Power_down	RW SWC	0x0	1 = Power down 0 = Normal operation When the port is switched from power down to normal operation, software reset and Auto-Negotiation are performed even bit[15] RESET and bit[9] RESTART_AUTO_NEGOTIATION are not set by the user.
10	Isolate	RW SWC	0x0	Isolate phy from RGMII. 1'b0: Normal mode 1'b1: Isolate mode
9	Re_Autoneg	RW SC SWS	0x0	Auto-Negotiation automatically restarts after hardware or software reset regardless of bit[9] RESTART. 1 = Restart Auto-Negotiation Process 0 = Normal operation
8	Duplex_Mode	RW	0x1	The duplex mode can be selected via either the Auto-Negotiation process or manual duplex selection. Manual duplex selection is allowed when Auto-Negotiation is disabled by setting bit[12] AUTO_NEGOTIATION to 0. 1 = Full Duplex 0 = Half Duplex
7	Collision_Test	RW SWC	0x0	Setting this bit to 1 makes the COL signal

				asserted whenever the TX_EN signal is asserted. 1 = Enable COL signal test 0 = Disable COL signal test
6	Speed_Selection(MSB)	RW	0x1	See bit13.
5:0	Reserved	RO	0x0	Reserved. Write as 0, ignore on read

6.2.2. 基本状态寄存器 (0x01)

表31. 基本状态寄存器 (0x01)

Bit	Symbol	Access	Default	Description
15	100BASE-T4	RO	0x0	PHY doesn't support 100BASE-T4
14	100BASE-X_Fd	RO	0x1	PHY supports 100BASE-X_FD
13	100BASE-X_Hd	RO	0x1	PHY supports 100BASE-X_HD
12	10Mbps_Fd	RO	0x1	PHY supports 10Mbps_Fd
11	10Mbps_Hd	RO	0x1	PHY supports 10Mbps_Hd
10	100BASE-T2_Fd	RO	0x0	PHY doesn't support 100BASE-T2_Fd
9	100BASE-T2_Hd	RO	0x0	PHY doesn't support 100BASE-T2_Hd
8	Extended_Status	RO	0x1	Whether support EXTended status register in MII 0xF 0: Not supported 1: Supported
7	Unidirect_Ability	RO	0x0	1'b0: PHY able to transmit from MII only when the PHY has determined that a valid link has been established 1'b1: PHY able to transmit from MII regardless of whether the PHY has determined that a valid link has been established
6	Mf_Preamble_Suppression	RO	0x1	1'b0: PHY will not accept management frames with preamble suppressed 1'b1: PHY will accept management frames with preamble suppressed
5	Autoneg_Complete	RO SWC	0x0	1'b0: Auto-negotiation process not completed 1'b1: Auto-negotiation process completed
4	Remote_Fault	RO RC SWC LH	0x0	1'b0: no remote fault condition detected 1'b1: remote fault condition detected
3	Autoneg_Ability	RO	0x1	1'b0: PHY not able to perform Auto-negotiation 1'b1: PHY able to perform Auto-negotiation
2	Link_Status	RO LL SWC	0x0	Link status 1'b0: Link is down 1'b1: Link is up
1	Jabber_Detect	RO RC SWC LH	0x0	10BASE-Te jabber detected. It would assert if TX activity lasts longer than 42ms. 1'b0: no jabber condition detected 1'b1: Jabber condition detected.
0	Extended_Capability	RO	0x1	To indicate whether support EXTended registers, to access from address register 0x1E and data register 0x1F 1'b0: Not supported 1'b1: Supported

6.2.3. PHY标识寄存器1 (0x02)

表 32. PHY标识寄存器1 (0x02)

Bit	Symbol	Access	Default	Description
15:0	Phy_Id	RO	0x4f51	Bits 3 to 18 of the Organizationally Unique Identifier

6.2.4. PHY 标识寄存器2 (0x03)

表33. PHY标识寄存器2 (0x03)

Bit	Symbol	Access	Default	Description
15:10	Phy_Id	RO	0x3a	Bits 19 to 24 of the Organizationally Unique Identifier
9:4	Type_No	RO	0x11	6 bits manufacturer's type number
3:0	Revision_No	RO	0xb	4 bits manufacturer's revision number

6.2.5. 自动协商通告 (0x04)

Table 34. Auto-Negotiation Advertisement (0x04)

Bit	Symbol	Access	Default	Description
15	NEXT_Page	RW	0x0	<p>This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs:</p> <p>This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs:</p> <ul style="list-style-type: none"> • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down <p>If 1000BASE-T is advertised, the required next pages are automatically transmitted. This bit must be set to 0 if no additional next page is needed.</p> <p>1 = Advertise 0 = Not advertised</p>
14	Ack	RO	0x0	Always 0.
13	Remote_Fault	RW	0x0	<p>1 = Set Remote Fault bit 0 = Do not set Remote Fault bit</p>
12	Extended_NEXT_Page	RW	0x1	<p>Extended EXT page enable control bit</p> <p>1 = Local device supports transmission of extended next pages 0 = Local device does not support transmission of extended next pages.</p>
11	Asymmetric_Pause	RW	0x0	<p>This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs:</p> <ul style="list-style-type: none"> • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to

				normal operation by writing register 0x0 bit[11] • Link goes down 1 = Asymmetric Pause 0 = No asymmetric Pause
10	Pause	RW	0x0	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down 1 = MAC PAUSE implemented 0 = MAC PAUSE not implemented
9	100BASE-T4	RO	0x0	1 = Able to perform 100BASE-T4 0 = Not able to perform 100BASE-T4 Always 0
8	100BASE-TX_Full_Duplex	RW	0x1	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down 1 = Advertise 0 = Not advertised
7	100BASE-TX_Half_Duplex	RW	0x1	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down 1 = Advertise 0 = Not advertised
6	10BASE-Tx_Full_Duplex	RW	0x1	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to

				normal operation by writing register 0x0 bit[11] • Link goes down 1 = Advertise 0 = Not advertised
5	10BASE-T _e _Half_Duplex	RW	0x1	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down 1 = Advertise 0 = Not advertised
4:0	Selector_Field	RW	0x1	Selector Field mode. 00001 = IEEE 802.3

6.2.6. 自动协商链路伙伴能力 (0x05)

表35. 自动协商链路伙伴能力 (0x05)

Bit	Symbol	Access	Default	Description
15	1000BASE-X_Fd	RO SWC	0x0	Received Code Word Bit 15 1 = Link partner is capable of next page 0 = Link partner is not capable of next page
14	ACK	RO SWC	0x0	Acknowledge. Received Code Word Bit 14 1 = Link partner has received link code word 0 = Link partner has not received link code word
13	REMOTE_FAULT	RO SWC	0x0	Remote Fault. Received Code Word Bit 13 1 = Link partner has detected remote fault 0 = Link partner has not detected remote fault
12	RESERVED	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 12
11	ASYMMETRIC_PAUSE	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 11 1 = Link partner requests asymmetric pause 0 = Link partner does not request asymmetric pause
10	PAUSE	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 10 1 = Link partner supports pause operation 0 = Link partner does not support pause operation
9	100BASE-T4	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 9 1 = Link partner supports 100BASE-T4 0 = Link partner does not support 100BASE-T4
8	100BASE-TX_FULL_DUPLEX	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 8 1 = Link partner supports 100BASE-TX full-duplex 0 = Link partner does not support 100BASE-TX full-duplex

7	100BASE-TX_HALF_DUPLEX	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 7 1 = Link partner supports 100BASE-TX half-duplex 0 = Link partner does not support 100BASE-TX half-duplex
6	10BASE-Te_FULL_DUPLEX	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 6 1 = Link partner supports 10BASE-Te full-duplex 0 = Link partner does not support 10BASE-Te full-duplex
5	10BASE-Te_HALF_DUPLEX	RO SWC	0x0	Technology Ability Field. Received Code Word Bit 5 1 = Link partner supports 10BASE-Te half-duplex 0 = Link partner does not support 10BASE-Te half-duplex
4:0	SELECTOR_FIELD	RO SWC	0x0	Selector Field Received Code Word Bit 4:0

6.2.7. 自动协商扩展寄存器 (0x06)

表36. 自动协商扩展寄存器 (0x06)

Bit	Symbol	Access	Default	Description
15:5	Reserved	RO	0x0	Reserved
4	Parallel Detection fault	RO RC LH SWC	0x0	1 = Fault is detected 0 = No fault is detected
3	Link partner EXT page able	RO LH SWC	0x0	1 = Link partner supports NEXT page 0 = Link partner does not support next page
2	Local NEXT Page able	RO	0x1	1 = Local Device supports NEXT Page 0 = Local Device does not support Next Page
1	Page received	RO RC LH	0x0	1 = A new page is received 0 = No new page is received
0	Link Partner Auto negotiation able	RO	0x0	1 = Link partner supports auto-negotiation 0 = Link partner does not support auto-negotiation

6.2.8. 自动协商下一页寄存器 (0x07)

表37. 自动协商下一页寄存器 (0x07)

Bit	Symbol	Access	Default	Description
15	NEXT Page	RW	0x0	Transmit Code Word Bit 15 1 = The page is not the last page 0 = The page is the last page
14	Reserved	RO	0x0	Reserved
13	Message page mode	RW	0x1	Transmit Code Word Bit 13 1 = Message Page 0 = Unformatted Page
12	Ack2	RW	0x0	Transmit Code Word Bit 12 1 = Comply with message 0 = Cannot comply with message
11	Toggle	RO	0x0	Transmit Code Word Bit 11 1 = This bit in the previously exchanged Code Word is logic 0

				0 = The Toggle bit in the previously exchanged Code Word is logic 1
10:0	Message/Unformatte	RW	0x1	Transmit Code Word Bits [10:0]. These bits are encoded as Message Code Field when bit[13] is set to 1, or as Unformatted Code Field when bit[13] is set to 0.

6.2.9. 自动协商链路伙伴接收NEXT页寄存器 (0x08)

Table 38. Auto-Negotiation Link Partner Received NEXT Page Register (0x08)

Bit	Symbol	Access	Default	Description
15	NEXT Page	RO	0x0	Received Code Word Bit 15 1 = This page is not the last page 0 = This page is the last page
14	Ack	RO	0x0	Received Code Word Bit 14 1 = successfully received its Link Partner's ack 0 = didn't receive its Link Partner's ack
13	Message page mode	RO	0x0	Received Code Word Bit 13 1 = Message Page 0 = Unformatted Page
12	Ack2	RO	0x0	Received Code Word Bit 12 1 = Comply with message 0 = Cannot comply with message
11	Toggle	RO	0x0	Received Code Word Bit 11 1 = This bit in the previously exchanged Code Word is logic 0 0 = The Toggle bit in the previously exchanged Code Word is logic 1
10:0	Message/Unformatte	RO	0x0	Received Code Word Bit 10:0 These bits are encoded as Message Code Field when bit[13] is set to 1, or as Unformatted Code Field when bit[13] is set to 0.

6.2.10. 主从控制寄存器 (0x09)

表39. 主从控制寄存器 (0x09)

Bit	Symbol	Access	Default	Description
15:13	Test mode	RW	0x0	The TX_TCLK signals from the RX_CLK pin is for jitter testing in test modes 2 and 3. When exiting the test mode, hardware reset or software reset through writing MII register 0x0 bit[15] must be performed to ensure normal operation. 000 = Normal Mode 001 = Test Mode 1 - Transmit Waveform Test 010 = Test Mode 2 - Transmit Jitter Test (MASTER mode) 011 = Test Mode 3 - Transmit Jitter Test (SLAVE mode) 100 = Test Mode 4 - Transmit Distortion Test 110, 111 = Reserved, normal operation.
12	Master/Slave Manual configuration Enable	RW	0x0	This bit is updated immediately after the writing operation; however the configuration does not

				take effect until any of the following occurs: <ul style="list-style-type: none"> • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down 1 = Manual MASTER/SLAVE configuration 0 = Automatic MASTER/SLAVE configuration.
11	Master/Slave configuration	RW	0x0	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: <ul style="list-style-type: none"> • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down This bit is ignored if bit[12] is 0. 1 = Manual configuration as MASTER 0 = Manual configuration as SLAVE.
10	Port Type	RW	0x0	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: <ul style="list-style-type: none"> • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down This bit is ignored if bit[12] is 1. 1 = Prefer multi-port device (MASTER) 0 = Prefer single port device (SLAVE)
9	1000BASE-T Full	RW	0x1	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: <ul style="list-style-type: none"> • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11] • Link goes down 1 = Advertise 0 = Not advertised
8	1000BASE-T Half-	RW	0x0	This bit is updated immediately after the writing operation; however the configuration does not take effect until any of the following occurs: <ul style="list-style-type: none"> • Software reset is asserted by writing register 0x0 bit[15] • Restart Auto-Negotiation is triggered by writing register 0x0 bit[9] • The port is switched from power down to normal operation by writing register 0x0 bit[11]

				<ul style="list-style-type: none"> Link goes down 1 = Advertise 0 = Not advertised (default)
7:0	Reserved	RW	0x0	Write as 0, ignore on read.

6.2.11. 主从状态寄存器 (0x0A)

表40. 主从状态寄存器 (0x0A)

Bit	Symbol	Access	Default	Description
15	Master/Slave_cfg_error	RO RC SWC LH	0x0	This register bit will clear on read, rising of MII 0.12 and rising of AN complete. 1 = Master/Slave configuration fault detected 0 = No fault detected
14	Master/Slave	RO	0x0	This bit is not valid unless register 0x1 bit5 is 1. 1 = Local PHY configuration resolved to Master 0 = Local PHY configuration resolved to Slave
13	Local Receiver Status	RO	0x0	1 = Local Receiver OK 0 = Local Receiver not OK
12	Remote Receiver	RO	0x0	1 = Remote Receiver OK 0 = Remote Receiver not OK
11	Link Partner	RO	0x0	This bit is not valid unless register 0x1 bit5 is 1. 1 = Link Partner supports 1000BASE-T half duplex 0 = Link Partner does not support 1000BASE-T half duplex
10	Link Partner	RO	0x0	This bit is not valid unless register 0x1 bit5 is 1. 1 = Link Partner supports 1000BASE-T full duplex 0 = Link Partner does not support 1000BASE-T full duplex
9:8	Reserved	RO	0x0	Reserved
7:0	Idle Error Count	RO RC	0x0	MSB of Idle Error Counter. The register indicates the idle error count since the last read operation performed to this register. The counter pegs at 11111111 and does not roll over.

6.2.12. MMD访问控制寄存器 (0x0D)

表 41. MMD访问控制寄存器 (0x0D)

Bit	Symbol	Access	Default	Description
15:14	Function	RW	0x0	00 = Address 01 = Data, no post increment 10 = Data, post increment on reads and writes 11 = Data, post increment on writes only
13:5	Reserved	RO	0x0	Reserved
4:0	DEVAD	RW	0x0	MMD register device address. 00001 = MMD1 00011 = MMD3 00111 = MMD7

6.2.13. MMD访问数据寄存器 (0x0E)

表42. MMD访问数据寄存器 (0x0E)

Bit	Symbol	Access	Default	Description
15:0	Address data	RW	0x0	If register 0xD bits [15:14] are 00, this register is used as MMD DEVAD address register. Otherwise, this register is used as MMD DEVAD data register as indicated by its address register.

6.2.14. 扩展状态寄存器 (0x0F)

表43. 扩展状态寄存器 (0x0F)

Bit	Symbol	Access	Default	Description
15	1000BASE-X Full Duplex	RO	0x0	1 = PHY supports 1000BASE-X Full Duplex 0 = PHY does not supports 1000BASE-X Full Duplex Always 0.
14	1000BASE-X Half Duplex	RO	0x0	1 = PHY supports 1000BASE-X Half Duplex. 0 = PHY does not support 1000BASE-X Half Duplex. Always 0
13	1000BASE-T Full Duplex	RO	0x1	1 = PHY supports 1000BASE-T Full Duplex 0 = PHY does not supports 1000BASE-T Full Duplex Always 1
12	1000BASE-T Half Duplex	RO	0x0	1 = PHY supports 1000BASE-T Half Duplex 0 = PHY does not support 1000BASE-T Half Duplex Always 0.
11:0	Reserved	RO	0x0	Reserved

6.2.15. PHY专用功能控制寄存器 (0x10)

表44. PHY特定功能控制寄存器 (0x10)

Bit	Symbol	Access	Default	Description
15:7	Reserved	RO	0x0	Reserved
6:5	Cross_md	RW	0x3	Changes made to these bits disrupt normal operation, thus a software reset is mandatory after the change. And the configuration does not take effect until software reset. 00 = Manual MDI configuration 01 = Manual MDIX configuration 10 = Reserved 11 = Enable automatic crossover for all modes
4	Reserved	RO	0x0	Reserved
3	Crs_on_tx	RW	0x0	This bit is effective in 10BASE-Te half-duplex mode and 100BASE-TX mode: 1 = Assert CRS on transmitting or receiving 0 = Never assert CRS on transmitting, only assert it on receiving.
2	En_sqe_test	RW	0x0	1 = SQE test enabled, 0 = SQE test disabled Note: SQE Test is automatically disabled in full-duplex mode regardless the setting in this

				bit.
1	En_pol_inv	RW	0x1	If polarity reversal is disabled, the polarity is forced to be normal in 10BASE-T _e . 1 = Polarity Reversal Enabled 0 = Polarity Reversal Disabled
0	Dis_jab	RW	0x0	1 = Disable 10BASE-T _e jabber detection function 0 = Enable 10BASE-T _e jabber detection function

6.2.16. PHY 特定状态寄存器 (0x11)

表45. PHY特定状态寄存器 (0x11)

Bit	Symbol	Access	Default	Description
15:14	Speed_mode	RO	0x0	These status bits are valid only when bit11 is 1. Bit11 is set when Auto-Negotiation is completed or Auto-Negotiation is disabled. 11 = Reserved 10 = 1000 Mbps 01 = 100 Mbps 00 = 10 Mbps
13	Duplex	RO	0x0	This status bit is valid only when bit11 is 1. Bit11 is set when Auto-Negotiation is completed or Auto-Negotiation is disabled. 1 = Full-duplex 0 = Half-duplex
12	Page Received real-time	RO	0x0	1 = Page received 0 = Page not received
11	Speed and Duplex Resolved	RO	0x0	When Auto-Negotiation is disabled, this bit is set to 1 for force speed mode. 1 = Resolved 0 = Not resolved
10	Link status real-time	RO	0x0	1 = Link up 0 = Link down
9:7	Reserved	RO	0x0	Reserved
6	MDI Crossover Status	RO	0x0	This status bit is valid only when bit11 is 1. Bit11 is set when Auto-Negotiation is completed or Auto-Negotiation is disabled. The bit value depends on register 0x10 “PHY specific function control register” bits6~bit5 configurations. Register 0x10 configurations take effect after software reset. 1 = MDIX 0 = MDI
5	Wirespeed downgrade	RO	0x0	1 = Downgrade 0 = No Downgrade
4	Reserved	RO	0x0	Reserved
3	Transmit Pause	RO	0x0	This status bit is valid only when bit11 is 1. Bit11 is set when Auto-Negotiation is completed. This bit indicates MAC pause resolution. This bit is for information purposes only and is not used by the device. When in force mode, this bit is set to be 0.

				1 = Transmit pause enabled 0 = Transmit pause disabled
2	Receive Pause	RO	0x0	This status bit is valid only when bit[11] is 1. Bit[11] is set when Auto-Negotiation is completed. This bit indicates MAC pause resolution. This bit is for information purposes only and is not used by the device. When in force mode, this bit is set to be 0. 1 = Receive pause enabled 0 = Receive pause disabled
1	Polarity Real Time	RO	0x0	1 = Reverted polarity 0 = Normal polarity
0	Jabber Real Time	RO	0x0	1 = Jabber 0 = No jabber

6.2.17. 中断屏蔽寄存器 (0x12)

表46. 中断屏蔽寄存器 (0x12)

Bit	Symbol	Access	Default	Description
15	Auto-Negotiation Error INT mask	RW	0x0	1 = Interrupt enable 0 = Interrupt disable
14	Speed Changed INT mask	RW	0x0	same as bit 15
13	Duplex changed INT mask	RW	0x0	same as bit 15
12	Page Received INT mask	RW	0x0	same as bit 15
11	Link Failed INT mask	RW	0x0	same as bit 15
10	Link Succeed INT mask	RW	0x0	same as bit 15
9:7	reserved	RW	0x0	No used.
6	WOL INT mask	RW	0x0	same as bit 15
5	Wirespeed downgraded INT mask	RW	0x0	same as bit 15
4:2	Reserved	RW	0x0	No used.
1	Polarity changed INT mask	RW	0x0	same as bit 15
0	Jabber Happened INT mask	RW	0x0	same as bit 15

6.2.18. 中断状态寄存器 (0x13)

表47. 中断状态寄存器 (0x13)

Bit	Symbol	Access	Default	Description
15	Auto-Negotiation Error INT	RO RC	0x0	Error can take place when any of the following happens: • MASTER/SLAVE does not resolve correctly • Parallel detect fault • No common HCD • Link does not come up after negotiation is complete • Selector Field is not equal • flp_receive_idle=true while Autoneg Arbitration FSM is in NEXT PAGE WAIT state 1 = Auto-Negotiation Error takes place 0 = No Auto-Negotiation Error takes place
14	Speed Changed INT	RO RC	0x0	1 = Speed changed 0 = Speed not changed

13	Duplex changed INT	RO RC	0x0	1 = duplex changed 0 = duplex not changed
12	Page Received INT	RO RC	0x0	1 = Page received 0 = Page not received
11	Link Failed INT	RO RC	0x0	1 = Phy link down takes place 0 = No link down takes place
10	Link Succeed INT	RO RC	0x0	1 = Phy link up takes place 0 = No link up takes place
9:7	reserved	RO RC	0x0	No used.
6	WOL INT	RO RC	0x0	1 = PHY received WOL magic frame. 0 = PHY didn't receive WOL magic frame
5	Wirespeed downgraded INT	RO RC	0x0	1 = speed downgraded. 0 = Speed didn't downgrade.
4:2	Reserved	RO	0x0	Reserved
1	Polarity changed INT	RO RC	0x0	1 = PHY revered MDI polarity 0 = PHY didn't revert MDI polarity
0	Jabber Happened INT	RO RC	0x0	1 = 10BASE-Te TX jabber happened 0 = 10BASE-Te TX jabber didn't happen Please refer to UTP MII Register 0x1 bit[1] Jabber_Detect.

6.2.19. 速度自动降级控制寄存器 (0x14)

表48. 速度自动降级控制寄存器

(0x14)

Bit	Symbol	Access	Default	Description
15:12	Reserved	RO	0x0	Reserved
11:6	Reserved	RW	0x20	Reserved
5	En_speed_downgrade	RW POS	0x1	When this bit is set to 1, the PHY enables smart-speed function. Writing this bit requires a software reset to update.
4:2	Autoneg retry limit pre-downgrade	RW	0x3	If these bits are set to 3, the PHY attempts five times (set value 3 + additional 2) before downgrading. The number of attempts can be changed by these bits. Only take effect after software reset
1	Reserved	RW	0x0	Reserved
0	Reserved	RO	0x0	Reserved

6.2.20. 接收错误计数器寄存器 (0x15)

表49. 接收错误计数器寄存器 (0x15)

Bit	Symbol	Access	Default	Description
15:0	Rx_err_counter	RO SWC	0x0	This counter increase by 1 at the 1st rising of RX_ER when RX_DV is 1. The counter will hold at maximum 16'hFFFF and not roll over.

6.2.21. 扩展寄存器的地址偏移寄存器 (0x1E)

表50. 扩展寄存器的地址偏移寄存器 (0x1E)

Bit	Symbol	Access	Default	Description
15:8	Reserved	RO	0x0	Reserved

7:0	Extended Register Address Offset	RW	0x0	It's the address offset of the extended register that will be Write or Read
-----	----------------------------------	----	-----	---

6.2.22. 扩展寄存器的数据寄存器 (0x1F)

表51. 扩展寄存器的数据寄存器 (0x1F)

Bit	Symbol	Access	Default	Description
15:0	Extended Register Data	RW	0x0	It's the data to be written to the extended register indicated by the address offset in register 0x1E, or the data read out from that extended register.

6.3. UTP MMD 寄存器

6.3.1. PCS 控制1寄存器 (MMD3, 0x0)

表52. PCS控制1寄存器 (MMD3, 0x0)

Bit	Symbol	Access	Default	Description
15	Pcs_rst	RW SC	0x0	Setting this bit will set all PCS registers to their default states. This action also initiate a software reset as setting MII 0x0 bit15 and a reset as setting MMD1 0x0 bit15 and MMD7 0x0 bit15.
14:11	Reserved	RO	0x0	Reserved
10	Clock_stoppable	RW SWC	0x0	Not used.
9:0	Reserved	RO	0x0	Reserved

6.3.2. PCS 状态1寄存器 (MMD3, 0x1)

表53. PCS状态1寄存器 (MMD3, 0x1)

Bit	Symbol	Access	Default	Description
15:12	Reserved	RO	0x0	Reserved
11	Tx_lpi_rxed	RO LH	0x0	When read as 1, it indicates that the transmit PCS has received low power idle signaling one or more times since the register was last read. Lach High.
10	Rx_lpi_rxed	RO LH	0x0	When read as 1, it indicates that the receive PCS has received low power idle signaling one or more times since the register was last read. Lach High.
9	Tx_lpi_indic	RO	0x0	When read as 1, it indicates that the transmit PCS is currently receiving low power idle signals.
8	Rx_lpi_indic	RO	0x0	When read as 1, it indicates that the receive PCS is currently receiving low power idle signals.
7:3	Reserved	RO	0x0	Reserved
2	Pcsrx_lnk_status	RO LL	0x0	PCS status, latch low.
1:0	Reserved	RO	0x0	Reserved

6.3.3. EEE 控制和能力寄存器 (MMD 3, 0x14) 表54. EEE 控制和能力寄存器 (MMD3, 0x14)

Bit	Symbol	Access	Default	Description
15:3	Reserved	RO	0x0	Reserved
2	1000BASE-T EEE	RO	0x1	Always 1. EEE is supported for 1000BASE-T
1	100BASE-TX EEE	RO	0x1	Always 1. EEE is supported for 100BASE-TX
0	Reserved	RO	0x0	Reserved

6.3.4. EEE 唤醒错误计数器 (MMD3, 0x16)

表55. EEE唤醒错误计数器 (MMD3, 0x16)

Bit	Symbol	Access	Default	Description
15:0	Lpi_wake_err_cnt	RO RC SWC	0x0	Count wake time faults where the PHY fails to complete its normal wake sequence within the time required for the specific PHY type.

6.3.5. 本地设备EEE能力 (MMD7, 0x3C)

表56. 本地设备EEE支持能力 (MMD7, 0x3C)

Bit	Symbol	Access	Default	Description
15:3	Reserved	RO	0x0	Reserved
2	EEE_1000BT	RW	0x0	PHY's 1000BASE-T EEE ability.
1	EEE_100BT	RW	0x0	PHY's 100BASE-TX EEE ability.
0	Reserved	RO	0x0	Reserved

6.3.6. 链路伙伴EEE能力 (MMD7, 0x3D)

表57. 链路伙伴EEE能力 (MMD7, 0x3D)

Bit	Symbol	Access	Default	Description
15:3	Reserved	RO	0x0	Reserved
2	LP_ge_eee_ability	RO	0x0	Link partner's 1000BASE-T EEE ability.
1	LP_ge_eee_ability	RO	0x0	Link partner's 100BASE-TX EEE ability.
0	Reserved	RO	0x0	Reserved

6.4. UTP LDS寄存器 (适用于YT8531D/YT8531P)

6.4.1. LRE 控制 (0x00)

表 58. LRE 控制 (0x00)

Bit	Symbol	Access	Default	Description
15	Reset	RW SC	0x0	PHY Software Reset. Writing 1 to this bit causes immediate PHY reset. Once the operation is done, this bit is cleared automatically. 1'b0: Normal operation; 1'b1: PHY reset
14	Reserved	RW	0x0	Reserved
13	Restart_LDS	RW SC	0x0	1'b1: restart LDS process
12	LDS_Enable	RW	0x0	1'b1: LDS enabled; 1'b0: LDS disabled
11	Reserved	RW	0x0	Reserved
10	Reserved	RW	0x0	Reserved
9:6	Speed_selection	RW	0x0	4'b0000: 10Mbps; 4'b1000: 100Mbps; Others:

				reserved
5:4	Pair_selection	RW	0x0	2'b00: 1 pair connection; 2'b01: 2 pair connections; 2'b10: 4 pair connections; 2'b11: reserved
3	M/S_selection	RW	0x0	1'b1: manually force local device to master, when reg0.12 = 0; 1'b0: manually force local device to slave, when reg0.12 = 0
2	Reserved	RW	0x0	Reserved
1:0	Reserved	RO	0x0	Reserved. Write as 0, ignore on read

6.4.2. LRE 状态 (0x01)

表59. LRE状态 (0x01)

Bit	Symbol	Access	Default	Description
15:14	Reserved	RO	0x0	Ignore on read
13	100Mbps_1-pair capable	RO	0x0	1'b1: 100Mbps 1-pair capable; 1'b0: Not 100Mbps 1-pair capable
12	100Mbps_4-pair capable	RO	0x1	1'b1: 100Mbps 4-pair capable; 1'b0: Not 100Mbps 4-pair capable
11	100Mbps_2-pair capable	RO	0x0	1'b1: 100Mbps 2-pair capable; 1'b0: Not 100Mbps 2-pair capable
10	10Mbps_2-pair capable	RO	0x0	1'b1: 10Mbps 2-pair capable; 1'b0: Not 10Mbps 2-pair capable
9	10Mbps_1-pair capable	RO	0x0	1'b1: 10Mbps 1-pair capable; 1'b0: Not 10Mbps 1-pair capable
8:6	Reserved	RO	0x7	Reserved
5	LDS_Complete	RO SWC	0x0	1'b1: LDS auto-negotiation complete; 1'b0: LDS auto-negotiation not complete
4	Support_IEEE_802.3_PHY	RO	0x1	1'b1: Support IEEE 802.3 PHY operation; 1'b0: Not Support IEEE 802.3 PHY operation
3	LDS_Ability	RO	0x1	1'b1: LDS auto-negotiation capable; 1'b0: Not LDS auto-negotiation capable
2	Link_Status	RO LL SWC	0x0	Link status; 1'b0: Link is down; 1'b1: Link is up
1	Reserved	RO	0x0	Reserved
0	Reserved	RO	0x1	Reserved

6.4.3. PHY ID 寄存器1 (0x02)

表60. PHY ID寄存器1 (0x02)

Bit	Symbol	Access	Default	Description
15:0	PHY_ID	RO	0x4F51	Bits 3 to 18 of the Organizationally Unique Identifier.

6.4.4. PHY ID寄存器2 (0x03)

表 61. PHY ID 寄存器2 (0x03)

Bit	Symbol	Access	Default	Description
-----	--------	--------	---------	-------------

15:10	Phy_Id	RO	0x3a	Bits 19 to 24 of the Organizationally Unique Identifier
9:4	Type_No	RO	0x11	6 bits manufacturer's type number
3:0	Revision_No	RO	0xb	4 bits manufacturer's revision number

6.4.5. LDS 自动协商通告能力 (0x04)

表62. LDS自动协商通告能力 (0x04)

Bit	Symbol	Access	Default	Description
15:6	Reserved	RO	0x0	reserved
5	100Mbps_1-pair capable	RW	0x0	1'b1: 100Mbps 1-pair capable; 1'b0: Not 100Mbps 1-pair capable
4	100Mbps_4-pair capable	RW	0x1	1'b1: 100Mbps 4-pair capable; 1'b0: Not 100Mbps 4-pair capable
3	100Mbps_2-pair capable	RW	0x0	1'b1: 100Mbps 2-pair capable; 1'b0: Not 100Mbps 2-pair capable
2	10Mbps_2-pair capable	RW	0x0	1'b1: 10Mbps 2-pair capable; 1'b0: Not 10Mbps 2-pair capable
1	10Mbps_1-pair capable	RW	0x0	1'b1: 10Mbps 1-pair capable; 1'b0: Not 10Mbps 1-pair capable
0	IEEE802.3 Auto negotiation capable	RW	0x1	1'b1: IEEE802.3 Auto negotiation capable; 1'b0: Not IEEE802.3 auto negotiation capable

6.4.6. LDS 链路伙伴能力 (0x07)

表63. LDS链路伙伴能力 (0x07)

Bit	Symbol	Access	Default	Description
15:6	Reserved	RO	0x0	Reserved
5	LP_100Mbps_1-pair_capable	RO	0x0	1'b1: link partner 100Mbps 1-pair capable; 1'b0: link partner not 100Mbps 1-pair capable
4	LP_100Mbps_4-pair_capable	RO	0x0	1'b1: link partner 100Mbps 4-pair capable; 1'b0: link partner not 100Mbps 4-pair capable
3	LP_100Mbps_2-pair_capable	RO	0x0	1'b1: link partner 100Mbps 2-pair capable; 1'b0: link partner not 100Mbps 2-pair capable
2	LP_10Mbps_2-pair_capable	RO	0x0	1'b1: link partner 10Mbps 2-pair capable; 1'b0: link partner not 10Mbps 2-pair capable
1	LP_10Mbps_1-pair_capable	RO	0x0	1'b1: link partner 10Mbps 1-pair capable; 1'b0: link partner not 10Mbps 1-pair capable
0	Reserved	RO	0x0	Reserved

6.4.7. LDS 扩展 (0x0A)

表64. LDS扩展 (0x0A)

Bit	Symbol	Access	Default	Description
15	Reserved	RO	0x0	Reserved
14	Master/Slave	RO	0x0	1 = Local PHY configuration resolved to Master; 0 = Local PHY configuration resolved to Slave
13:12	Connections_pairs	RO	0x0	Number of pairs; 2'b00: 1 pair;

				2'b01: 2 pairs; 2'b10: 4 pairs; 2'b11: reserved
11:0	Estimated_cable_length	RO	0x0	Cable length measured via LDS.

6.4.8. LDS 结果 (0x0B)

表65. LDS结果 (0x0B)

Bit	Symbol	Access	Default	Description
15:6	Reserved	RO	0x0	Reserved
5	4-pair_100M	RO	0x0	1'b1: local PHY configuration resolved to 4-pair 100M, LRE100-4
4	Auto_negotiation	RO	0x0	1'b1: local PHY configuration resolved to IEEE802.3 auto-negotiation
3:0	Reserved	RO	0x0	Reserved

6.5. UTP EXT 寄存器

6.5.1. Pkgen 配置1 (EXT_0x38)

表66. Pkgen 配置1 (EXT_0x38)

Bit	Symbol	Access	Default	Description
15:13	Reserved	RO	0x0	Reserved
12	En_pkgen_da_sa	RW	0x0	1: set the DA/SA of the packet generated by pkg_gen to a programmed value; For DA, if UTP EXT 0x38 bit[11] is 1, the DA is set to broadcast address FF-FF-FF-FF-FF-FF; else, the DA is set to fix value, the highest 5 Bytes are 00-00-00-00-00, and the lowest 1 Byte is programmed by UTP EXT 0x3A bit[15:8]. For SA, the highest 5 Bytes are 00-00-00-00-00, and the lowest 1 Byte is programmed by UTP EXT 0x3A bit[7:0]. 0: the DA/SA is not programmed value
11	Pkgen_brdest	RW	0x0	Valid when UTP EXT 0x38 bit12 is 1. 1: set the DA to broadcast address FF-FF-FF-FF-FF-FF 0: set the DA to a fixed programmed value.
10	Pkgchk_txsrc_sel	RW	0x0	1'b1: the package checker on TX side will check the tx data generated by pkg_gen; 1'b0: the package checker on TX side will check the tx data of UTP GMII/MII.
9	Pkgen_en_az	RW	0x0	1: to enable send LPI pattern during the IPG of the packages sent by pkg_gen.
8:0	Pkgen_in_az_t	RW	0x1ff	The time how long LPI pattern is sent, unit is us.

6.5.2. Pkgen 配置2 (0x39)

表 67. Pkgen 配置2 (EXT_0x39)

Bit	Symbol	Access	Default	Description
-----	--------	--------	---------	-------------

15:8	Pkgen_pre_az_t	RW	0x20	The time from the end of last package to the beginning of LPI pattern, unit is us.
7:0	Pkgen_aft_az_t	RW	0x19	The time from the end of LPI pattern to the beginning of next package, unit is us.

6.5.3. 封包生成器配置3 (EXT_0x3A)

表68. Pkgen Cfg3 (EXT_0x3A)

Bit	Symbol	Access	Default	Description
15:8	Pkgen_da	RW	0x0	Lowest 8 bits of DA, others is zero. Refer to UTP EXT 0x38 bit[12] for detail.
7:0	Pkgen_sa	RW	0x0	Lowest 8 bits of SA, others is zero. Refer to UTP EXT 0x38 bit[12] for detail.

6.5.4. 数据包生成器配置4 (0x3B)

表 69. Pkgen 配置4 (EXT_0x3B)

Bit	Symbol	Access	Default	Description
15:8	Reserved	RO	0x0	Reserved
7:0	Pkg_data_fix	RW	0x0	Valid when EXT 0xA0 bit1:0 is 11. The fixed GMII data pattern that will be sent.

6.5.5. 软件包配置0 (EXT_0xA0)

表 70. 封装置置0 (EXT_0xA0)

Bit	Symbol	Access	Default	Description
15	Pkg_chk_en	RW	0x0	1: to enable UTP RX/TX package checker. RX checker checks the UTP GMII/MII RX data; TX checker checks the UTP GMII/MII TX data.
14	Pkg_en_gate	RW	0x1	1: to enable gate all the clocks to package self-test module when bit15 pkg_chk_en is 0, bit13 bp_pkg_gen is 1 and bit12 pkg_gen_en is 0; 0: not gate the clocks.
13	Bp_pkg_gen	RW	0x1	1: normal mode, to send GMII/MII TX data from RGMII; 0: test mode, to send out the GMII/MII data generated by UTP pkg_gen module.
12	Pkg_gen_en	RW SC	0x0	1: to enable pkg_gen generating GMII/MII packages. But, the data will only be sent to transceiver when Bit13 bp_pkg_gen is 1'b0. If pkg_burst_size is 0, continuous packages will be generated and will be stopped only when pkg_gen_en is set to 0; Otherwise, after the expected packages are generated, pkg_gen will stop, pkg_gen_en will be self-cleared.
11:8	Pkg_prm_lth	RW	0x8	The preamble length of the generated packages, in Byte unit. Pkg_gen function only support >=2 Byte preamble length. Values smaller than 2 will be ignored by the pkg_gen module.
7:4	Pkg_ipg_lth	RW	0xd	The IPG of the generated packages, in Byte unit for setting smaller than 12. For setting 13, ipg is 2ms; for setting 14, ipg is 20ms; for 15, ipg is 400ms; Pkg_gen function only support >=2

				Byte preamble length. Values smaller than 2 will be ignored by the pkg_gen module.
3	Reserved	RW	0x0	Reserved
2	Pkg_corrupt_crc	RW	0x0	1: to make pkg_gen to send out CRC error packages. 0: pkg_gen sends out CRC good packages.
1:0	Pkg_payload	RW	0x0	Control the payload of the generated packages. 00: increased Byte payload; 01: random payload; 10: fix pattern 0x5AA55AA5... 11: fix pattern set by EXT 0x3B bit7:0.

6.5.6. 封装配置1 (EXT_0xA1)

表71. 封装配置1 (EXT_0xA1)

Bit	Symbol	Access	Default	Description
15:0	Pkg_length	RW	0x40	To set the length of the generated packages.

6.5.7. 包配置2 (EXT_0xA2)

表72. 封装配置2 (EXT_0xA2)

Bit	Symbol	Access	Default	Description
15:0	Pkg_burst_size	RW	0x0	To set the number of packages in a burst of package generation.

6.5.8. 封包接收有效0 (EXT_0xA3)

表73. 封装接收有效0 (EXT_0xA3)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_valid_high	RO RC	0x0	Pkg_ib_valid[31:16], pkg_ib_valid is the number of RX packages from wire whose CRC are good and length are >=64Byte and <=1518Byte.

6.5.9. 软件包接收验证1 (EXT_0xA4)

表74. 封装接收有效信号1 (EXT_0xA4)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_valid_low	RO RC	0x0	Pkg_ib_valid[15:0], pkg_ib_valid is the number of RX packages from wire whose CRC are good and length are >=64Byte and <=1518Byte.

6.5.10. 封装接收操作系统0 (EXT_0xA5)注：根据技术文档翻译惯例：1. 保留原始编号结构6.5.10.2. "Pkg" 译为"封

表75. 封装接收Os0 (EXT_0xA5)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_os_good_high	RO RC	0x0	Pkg_ib_os_good[31:16], pkg_ib_os_good is the number of RX packages from wire whose CRC are good and length are >1518Byte.

6.5.11. 软件包 Rx Os1 (EXT_0xA6)

表76. 包接收操作系统1 (EXT_0xA6)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_os_good_low	RO RC	0x0	Pkg_ib_os_good[15:0], pkg_ib_os_good is the number of RX packages from wire whose CRC are good and length are >1518Byte.

6.5.12. 包接收用户0 (EXT_0xA7)

表77. 接收包用户通道0 (EXT_0xA7)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_us_good_high	RO RC	0x0	Pkg_ib_us_good[31:16], pkg_ib_us_good is the number of RX packages from wire whose CRC are good and length are <64Byte.

6.5.13. 包接收用户1 (EXT_0xA8)

表78. 封装接收用户1 (EXT_0xA8)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_us_good_low	RO RC	0x0	Pkg_ib_us_good[15:0], pkg_ib_us_good is the number of RX packages from wire whose CRC are good and length are <64Byte.

6.5.14. 数据包接收错误 (EXT_0xA9)

表 79. 数据包接收错误 (EXT_0xA9)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_err	RO RC	0x0	pkg_ib_err is the number of RX packages from wire whose CRC are wrong and length are >=64Byte, <=1518Byte.

6.5.15. 封装接收操作系统异常 (EXT_0xAA)

表80. 包接收OS错误 (EXT_0xAA)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_os_bad	RO RC	0x0	pkg_ib_os_bad is the number of RX packages from wire whose CRC are wrong and length are >1518Byte.

6.5.16. 数据包接收分片 (EXT_0xAB)

表 81. 包接收片段 (EXT_0xAB)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ib_frag	RO RC	0x0	pkg_ib_frag is the number of RX packages from wire whose length are <64Byte.

6.5.17. 数据包接收Nosfd (EXT_0xAC)

表82. Pkg Rx Nosfd (EXT_0xAC)

Bit	Symbol	Access	Default	Description
-----	--------	--------	---------	-------------

15:0	Pkg_ib_nosfd	RO RC	0x0	pkg_ib_nosfd is the number of RX packages from wire whose SFD is missed.
------	--------------	-------	-----	--

6.5.18. 包传输有效0 (EXT_0xAD)

表83. 封装发送有效0 (EXT_0xAD)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_valid_high	RO RC	0x0	Pkg_ob_valid[31:16], pkg_ob_valid is the number of TX packages from MII whose CRC are good and length are >=64Byte and <=1518Byte.

6.5.19. 包发送验证1 (EXT_0xAE)

表 84. Pkg Tx Valid1 (EXT_0xAE)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_valid_low	RO RC	0x0	Pkg_ob_valid[15:0], pkg_ob_valid is the number of TX packages from MII whose CRC are good and length are >=64Byte and <=1518Byte.

6.5.20. 封装传输 Os0 (EXT_0xAF)

表 85. 封装发送 Os0 (EXT_0xAF)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_os_good_high	RO RC	0x0	Pkg_ob_os_good[31:0], pkg_ob_os_good is the number of TX packages from GMII whose CRC are good and length are >1518Byte.

6.5.21. 软件包传输操作系统1 (EXT_0xB0)

表86. Pkg Tx Os1 (EXT_0xB0)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_os_good_low	RO RC	0x0	Pkg_ob_os_good[15:0], pkg_ob_os_good is the number of TX packages from GMII whose CRC are good and length are >1518Byte.

6.5.22. 包传输用户0 (EXT_0xB1)

表87. 包传输用户0 (EXT_0xB1)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_us_good_high	RO RC	0x0	Pkg_ob_us_good[31:0], pkg_ob_us_good is the number of TX packages from GMII whose CRC are good and length are <64Byte.

6.5.23. 数据包发送用户1 (EXT_0xB2)

表 88. 包发送用户1 (EXT_0xB2)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_us_good_low	RO RC	0x0	Pkg_ob_us_good[15:0], pkg_ob_us_good is the

				number of TX packages from GMII whose CRC are good and length are <64Byte..
--	--	--	--	---

6.5.24. 包传输错误 (EXT_0xB3)

表89. 包裹传输错误 (EXT_0xB3)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_err	RO RC	0x0	pkg_ob_err is the number of TX packages from GMII whose CRC are wrong and length are >=64Byte, <=1518Byte.

6.5.25. 包传输操作系统错误 (EXT_0xB4)

表 90. 包传输操作系统不良 (EXT_0xB4)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_os_bad	RO RC	0x0	pkg_ob_os_bad is the number of TX packages from GMII whose CRC are wrong and length are >=1518Byte.

6.5.26. 包传输分片 (EXT_0xB5)

表91. 包发送分片 (EXT_0xB5)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_frag	RO RC	0x0	pkg_ob_frag is the number of TX packages from GMII whose length are <64Byte.

6.5.27. 封装器发送 Nosfd (EXT_0xB6)

表 92. Pkg Tx Nosfd (EXT_0xB6)

Bit	Symbol	Access	Default	Description
15:0	Pkg_ob_nosfd	RO RC	0x0	pkg_ob_nosfd is the number of TX packages from GMII whose SFD is missed.

7. 时序和AC/DC特性

7.1. 直流特性

Table 93. DC Characteristics

Symbol	Parameter	Min	Typ	Max	Units
Voh (3.3V)	Minimum High Level Output Voltage	2.4	-	3.63	V
Vol (3.3V)	Maximum Low Level Output Voltage	-0.3	-	0.4	V
Voh (2.5V)	Minimum High Level Output Voltage	2	-	2.8	V
Vol (2.5V)	Maximum Low Level Output Voltage	-0.3	-	0.4	V
Voh (1.8V)	Minimum High Level Output Voltage	1.62	-	2.1	V
Vol (1.8V)	Maximum Low Level Output Voltage	-0.3	-	0.4	V
Vih (3.3V)	Minimum High Level Input Voltage	2	-	-	V
Vil (3.3V)	Maximum Low Level Input Voltage	-	-	0.8	V
Vih (2.5V)	Minimum High Level Input Voltage	1.7	-	-	V
Vil (2.5V)	Maximum Low Level Input Voltage	-	-	0.7	V
Vih (1.8V)	Minimum High Level Input Voltage	1.2	-	-	V
Vil (1.8V)	Maximum Low Level Input Voltage	-	-	0.5	V

7.2. 交流特性

7.2.1. RGMII Timing w/o delay

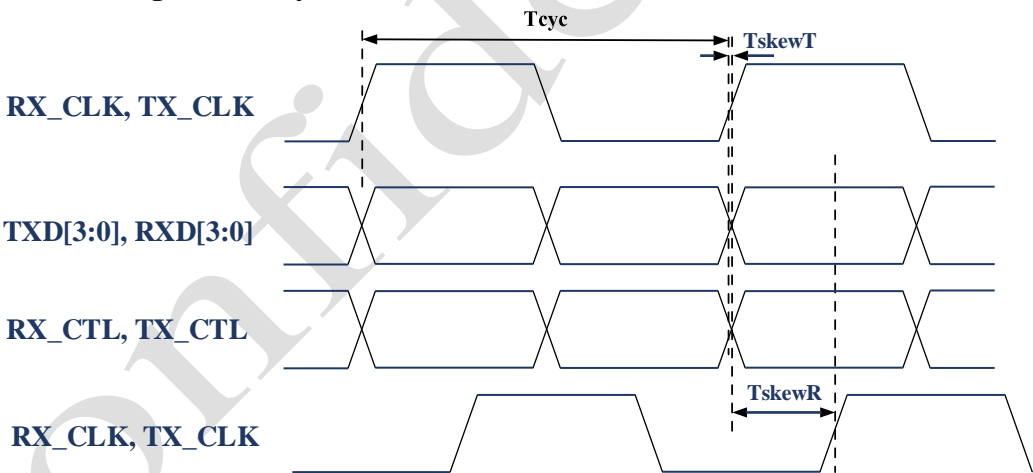


图12. RGMII时序无延迟

表94. RGMII时序（无延迟）

Symbol	Parameter	Min	Typ	Max	Unit
TskewT	Data to clock output skew (at Transmitter)	-500	0	500	ps
TskewR	Data to clock output skew (at Receiver)	1	—	—	ns
Tcyc	Clock cycle duration	7.2	8.0	8.8	ns
Duty_G	Duty cycle for Gigabit	45	50	55	%
Duty_T	Duty cycle for 10/100T	40	50	60	%
Tr/Tf	Rise/Fall time (20 - 80%)	—	—	0.75	ns

7.2.2. RGMII 带内部延迟的时序

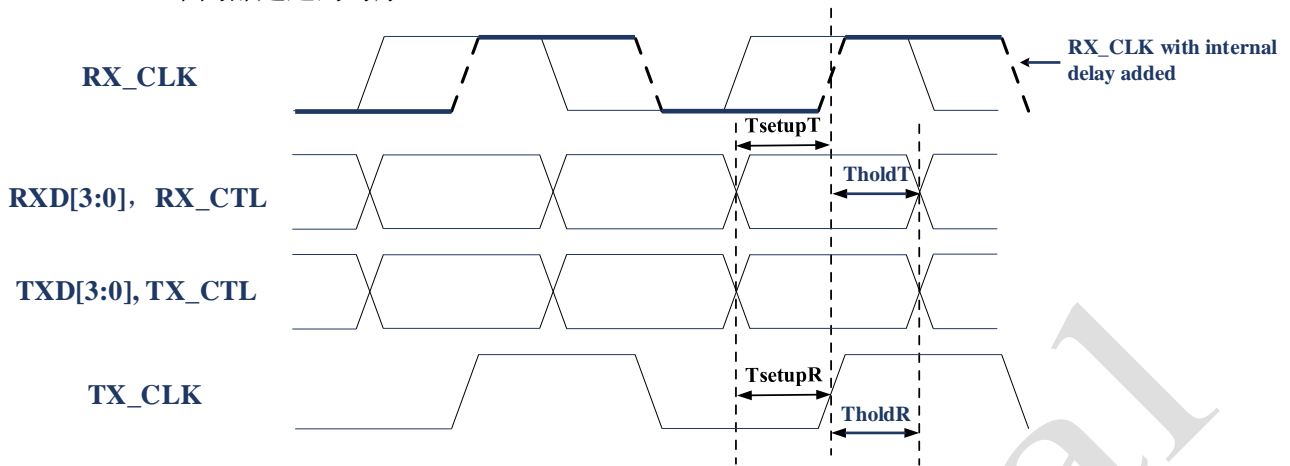


图13. 采用内部延迟的RGMII时序

表95. 采用内部延迟的RGMII时序

Symbol	Parameter	Min	Typ	Max	Unit
TsetupT	Data to Clock output Setup Time (at Transmitter integrated delay)	1.0	2.0	-	ns
TholdT	Clock to Data output Hold Time (at Transmitter integrated delay)	1.0	2.0	-	ns
TsetupR	Data to Clock input Setup Time (at Receiver integrated delay)	1.0	2.0	-	ns
TholdR	Data to Clock input Hold Time (at Reciever integrated delay)	1.0	2.0	-	ns

7.2.3. SMI (MDC/MDIO) 接口特性

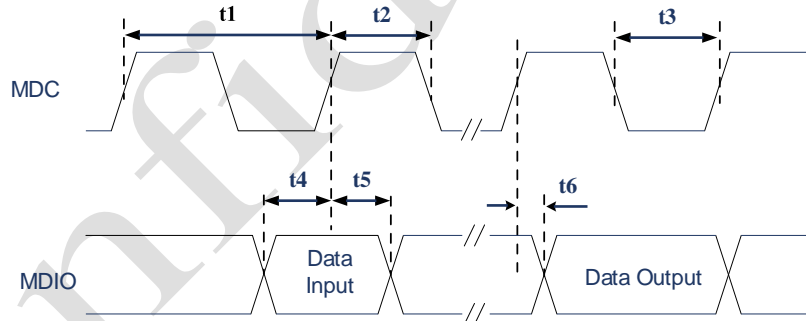


图 14. SMI (MDC/MDIO) 时序

表96. SMI (MDC/MDIO) 接口特性

Symbol	Description	Min	Typ	Max	Units
t1	MDC Clock Period	80	-	-	ns
t2	MDC High Time	32	-	-	ns
t3	MDC Low Time	32	-	-	ns
t4	MDIO to MDC Rising Setup Time (Data Input)	10	-	-	ns
t5	MDIO to MDC Rising Hold Time (Data Input)	10	-	-	ns
t6	MDIO Valid from MDC rising edge (Data Output)	0	-	20	ns

7.3. 晶体需求

表97. 晶体需求 {v*}

Symbol	Description	Min	Typ	Max	Unit
Fref	Parallel Resonant Crystal Reference Frequency	-	25	-	MHz
Fref Tolerance	Parallel Resonant Crystal Reference Frequency Tolerance	-50	-	50	ppm
Fref Duty Cycle	Reference Clock Input Duty Cycle	40	-	60	%
ESR	Equivalent Series Resistance	-	-	50	ohm
DL	Drive Level	-	-	0.5	mW
Vih	Crystal output high level	1.4	-	-	V
Vil	Crystal output low level	-	-	0.7	V

7.4. 振荡器/外部时钟要求

表98. 振荡器/外部时钟要求

Parameter	Min	Typ	Max	Unit
Frequency	-	25	-	MHz
Frequency tolerance	-50	-	50	PPM
Duty Cycle	40	-	60	%
Vih	1.4	-	AVDD33+0.3	V
Vil	-	-	0.7	V
Rise Time (10%~90%)	-	-	10	ns
Fall Time (10%~90%)	-	-	10	ns

8. Power Requirements

8.1. 绝对最大额定值

Table 99. Absolute Maximum Ratings

Symbol	Description	Mini	Max	Unit
VDD33/AVDD33	Supply Voltage 3.3V	-0.3	3.7	V
AVDDL/DVDDL	Supply Voltage 1.1V	-0.2	1.4	V
2.5V RGMII	Supply Voltage 2.5V	-0.3	2.8	V
1.8V RGMII	Supply Voltage 1.8V	-0.3	2.3	V
3.3V DC input	Input Voltage	-0.3	3.7	V
VDDL DC input	Input Voltage	-0.3	1.4	V

8.2. 推荐操作条件

Table 100. Recommended Operating Conditions

Description	Pins	Min	Typ	Max	Unit
Supply Voltage	DVDD33, AVDD33	2.97	3.3	3.63	V
	AVDDL, DVDDL	1.045	1.1	1.32	V
	2.5V RGMII	2.25	2.5	2.75	V
	1.8V RGMII	1.62	1.8	1.98	V
YT8531C Ambient Operating Temperature Ta		0	-	70	°C
YT8531H Ambient Operating Temperature Ta		-40	-	85	°C
YT8531DC Ambient Operating Temperature Ta		0	-	70	°C
YT8531DH Ambient Operating Temperature Ta		-40	-	85	°C
YT8531P Ambient Operating Temperature Ta		0	-	70	°C
Maximum Junction Temperature				125	°C

8.3. 幂序列

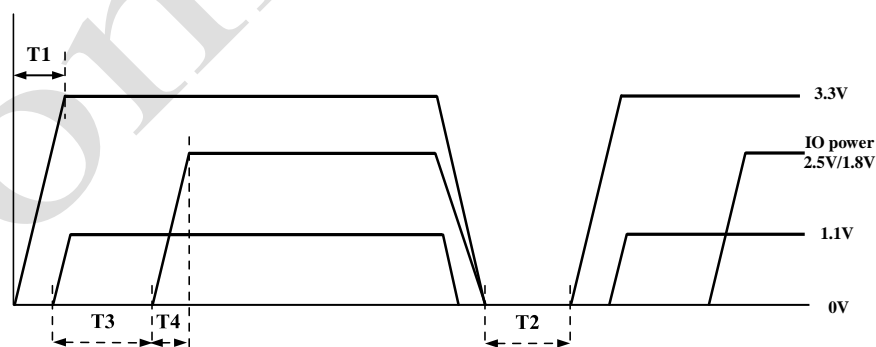


图15. 电源时序图

表 101. 电源时序参数

Symbol	Description	Min	Typ	Max	Units
T1	3.3V rising time	0.5	-	-	ms
T2	3.3V and 1.1V power down duration	100	-	-	ms
T3	Core power 1.1V ready time	2.5	-	-	ms
T4	Internal LDO ready time	100	-	-	us

8.4. 功耗

8.4.1. YT8531 功耗

表102. YT8531 功耗

Condition	DVDD_RGMII (mA)	DVDD33 + VDD33_LX (mA)	AVDD33 (mA)	Power Consumption (mW)
Link Down	1	7	21	95.7
Link Up @1000Mbps	13	51	61	412.5
Traffic @1000Mbps	28	57	61	481.8

Note: Test by YT8531C/YT8531H TT IC with DVDD_RGMII / DVDD33 / VDD33_LX / AVDD33 = 3.3V and VDDL = 1.1V (with inductor SWPA3012S2R2NT connected to REG_O (pin30)) at room temperature.

8.4.2. YT8531D 功耗

表103. YT8531D功耗

Condition	DVDD_RGMII (mA)	DVDD33 + VDD33_LX (mA)	AVDD33 (mA)	Power Consumption (mW)
Link Down	1	21	21	95.7
Link Up @1000Mbps	13	127	61	663.3
Traffic @1000Mbps	28	137	61	745.8

Note: Test by YT8531DC/YT8531DH TT IC with DVDD_RGMII / DVDD33 / VDD33_LX / AVDD33 = 3.3V and VDDL = 1.1V (with 0ohm resistance connected to LDO_O (pin30)) at room temperature.

8.4.3. YT8531P 功耗

表 104. YT8531P 功耗

Condition	DVDD_RGMII (mA)	DVDD33 (mA)	AVDD33 (mA)	VDDL (mA)	Power Consumption (mW)
Link Down	1	1	21	18	95.7
Link Up @1000Mbps	18	5	61	117	405.9
Traffic @1000Mbps	34	5	61	128	470.8

Note: Test by YT8531P TT IC with DVDD_RGMII / DVDD33 / VDD33_LX / AVDD33 = 3.3V and VDDL = 1.1V from external at room temperature.

8.5. 最大功耗

8.5.1. YT8531 最大功耗

表105. YT8531最大功耗

Condition	DVDD_RGMII (mA)	DVDD33 + VDD33_LX (mA)	AVDD33 (mA)	Power Consumption (mW)
Traffic @1000Mbps	30.8	62.7	67.1	530.0

Note: Test by YT8531H FF IC with DVDD_RGMII / DVDD33 / VDD33_LX / AVDD33 = 3.3V and VDDL = 1.1V (with inductor SWPA3012S2R2NT connected to REG_O (pin30)) at high temperature 85°C.

8.5.2. YT8531D 最大功耗

表 106. YT8531D 最大功耗

Condition	DVDD_RGMII (mA)	DVDD33 + VDD33_LX (mA)	AVDD33 (mA)	Power Consumption (mW)
Traffic @1000Mbps	30.8	150.7	67.1	820.4

Note: Test by YT8531DH FF IC with DVDD_RGMII / DVDD33 / VDD33_LX / AVDD33 = 3.3V and VDDL = 1.1V (with 0ohm resistance connected to LDO_O (pin30)) at high temperature 85°C.

8.5.3. YT8531P 最大功耗

表107. YT8531P最大功耗

Condition	DVDD_RGMII (mA)	DVDD33 (mA)	AVDD33 (mA)	VDDL (mA)	Power Consumption (mW)
Traffic @1000Mbps	37.4	5.5	67.1	140.8	517.9

Note: Test by YT8531P FF IC with DVDD_RGMII / DVDD33 / VDD33_LX / AVDD33 = 3.3V and VDDL = 1.1V from external at high temperature 85°C.

8.6. 电源噪声

3.3V的最大噪声应低于100mV，DVDDL的最大噪声应低于80mV，AVDDL的最大噪声应低于50mV

。

9. Thermal Resistance

表 108. 热阻

Symbol	Parameter	Condition	Typ	Units
θ_{JA}	Thermal resistance - junction to ambient $\theta_{JA} = (T_J - T_A) / P$ P = Total power dissipation	JEDEC 3 in. x 4.5 in. 4-layer PCB with no air flow $T_A=25^{\circ}\text{C}$	33.4	$^{\circ}\text{C/W}$
		JEDEC 3 in. x 4.5 in. 4-layer PCB with no air flow $T_A=85^{\circ}\text{C}$	31	$^{\circ}\text{C/W}$
θ_{JB}	Thermal resistance - junction to board $\theta_{JB} = (T_J - T_B) / P_{\text{bottom}}$ P_{bottom} = Power dissipation from the bottom of the package to the PCB surface.	JEDEC with no air flow	12.3	$^{\circ}\text{C/W}$
$\theta_{JC\text{-Top}}$	Thermal resistance - junction to case $\theta_{JC} = (T_J - T_C) / P_{\text{top}}$ P_{top} = Power dissipation from the top of the package	JEDEC with no air flow	28.4	$^{\circ}\text{C/W}$

10. Mechanical Information

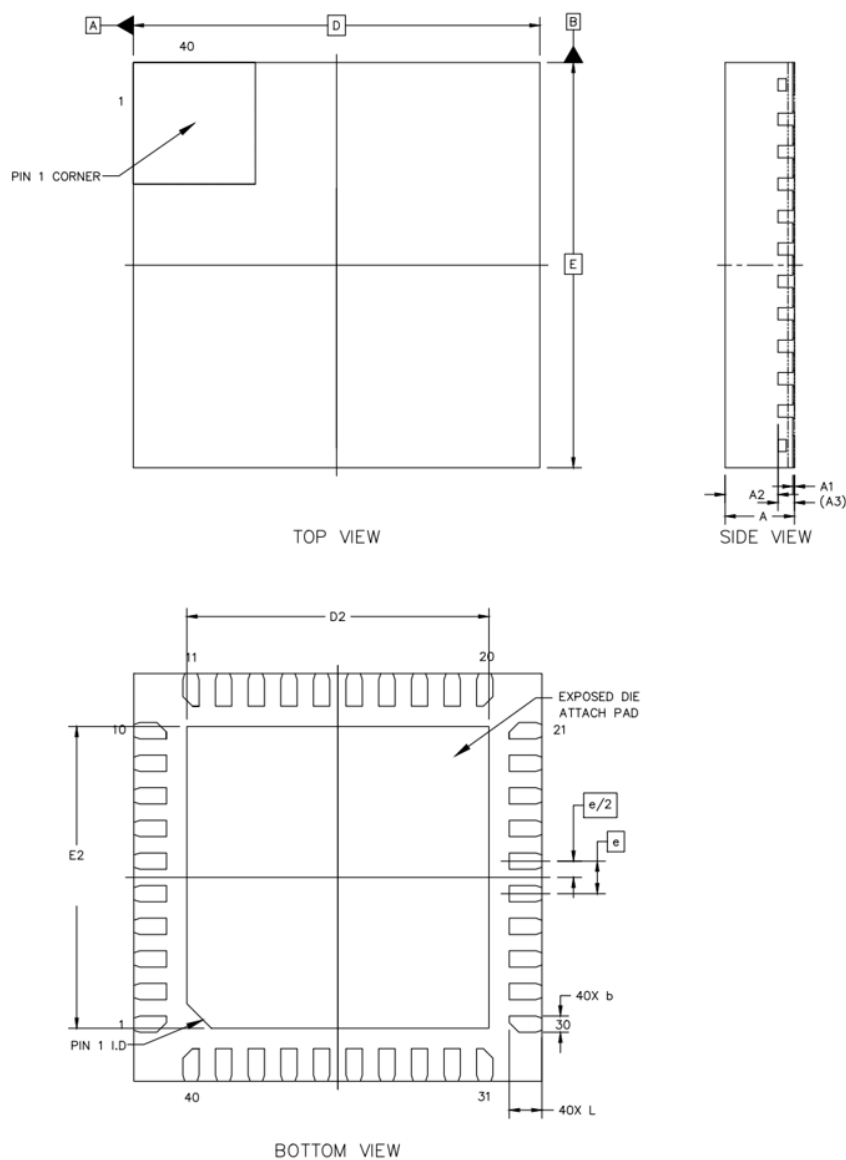


表 109. 机械尺寸

		SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS		A	0.80	0.85	0.90
STAND OFF		A1	0	0.02	0.05
MOLD THICKNESS		A2	---	0.65	---
L/F THICKNESS		A3	0.203 REF		
LEAD WIDTH		b	0.15	0.20	0.25
BODY SIZE	X	D	5.00 BSC		
	Y	E	5.00 BSC		
LEAD PITCH		e	0.40 BSC		
EP SIZE	X	D2	3.50	3.70	3.90
	Y	E2	3.50	3.70	3.90
LEAD LENGTH		L	0.30	0.40	0.50

11. 订购信息

Motorcomm提供符合RoHS标准的{v*}RoHS封装方案。

表110. 订购信息

Part Number	Package Version*	Grade	Package	Pack	Status	Operation Temp
YT8531C	A	Consumer	QFN 40 5x5 mm	Tape Reel 3000ea		0 ~70°C
YT8531H	A	Industrial	QFN 40 5x5 mm	Tape Reel 3000ea		-40 ~ 85°C
YT8531DC	A	Consumer	QFN 40 5x5 mm	Tape Reel 3000ea		0 ~70°C
YT8531DH	A	Industrial	QFN 40 5x5 mm	Tape Reel 3000ea		-40 ~ 85°C
YT8531P	A	Consumer	QFN 40 5x5 mm	Tape Reel 3000ea		0 ~70°C
YT8531C	B	Consumer	QFN 40 5x5 mm	Tape Reel 3000ea		0 ~70°C
YT8531H	B	Industrial	QFN 40 5x5 mm	Tape Reel 3000ea		-40 ~ 85°C
YT8531DC	B	Consumer	QFN 40 5x5 mm	Tape Reel 3000ea		0 ~70°C
YT8531DH	B	Industrial	QFN 40 5x5 mm	Tape Reel 3000ea		-40 ~ 85°C
YT8531P	B	Consumer	QFN 40 5x5 mm	Tape Reel 3000ea		0 ~70°C

*Note: Refer to the document of **the Difference between YT8531 Serials**, to find more information about Package Version when you prepare to order.