

MMET 410 – Lab 4

Instructions


- You need to include task 1 2 and 3 in your report
- For task 1, write the answer for the given questions
- For task 2 and 3, the format will be same as previous labs
 - Description
 - Action sequences
 - your input and output address
 - Program screenshot or picture
- The deadline for report submission is tomorrow midnight

Path: <none>

Select a Language...

TON TOF RTO CTU CTD RES

Favorites Add-On Alarms Bit Timer/Counter

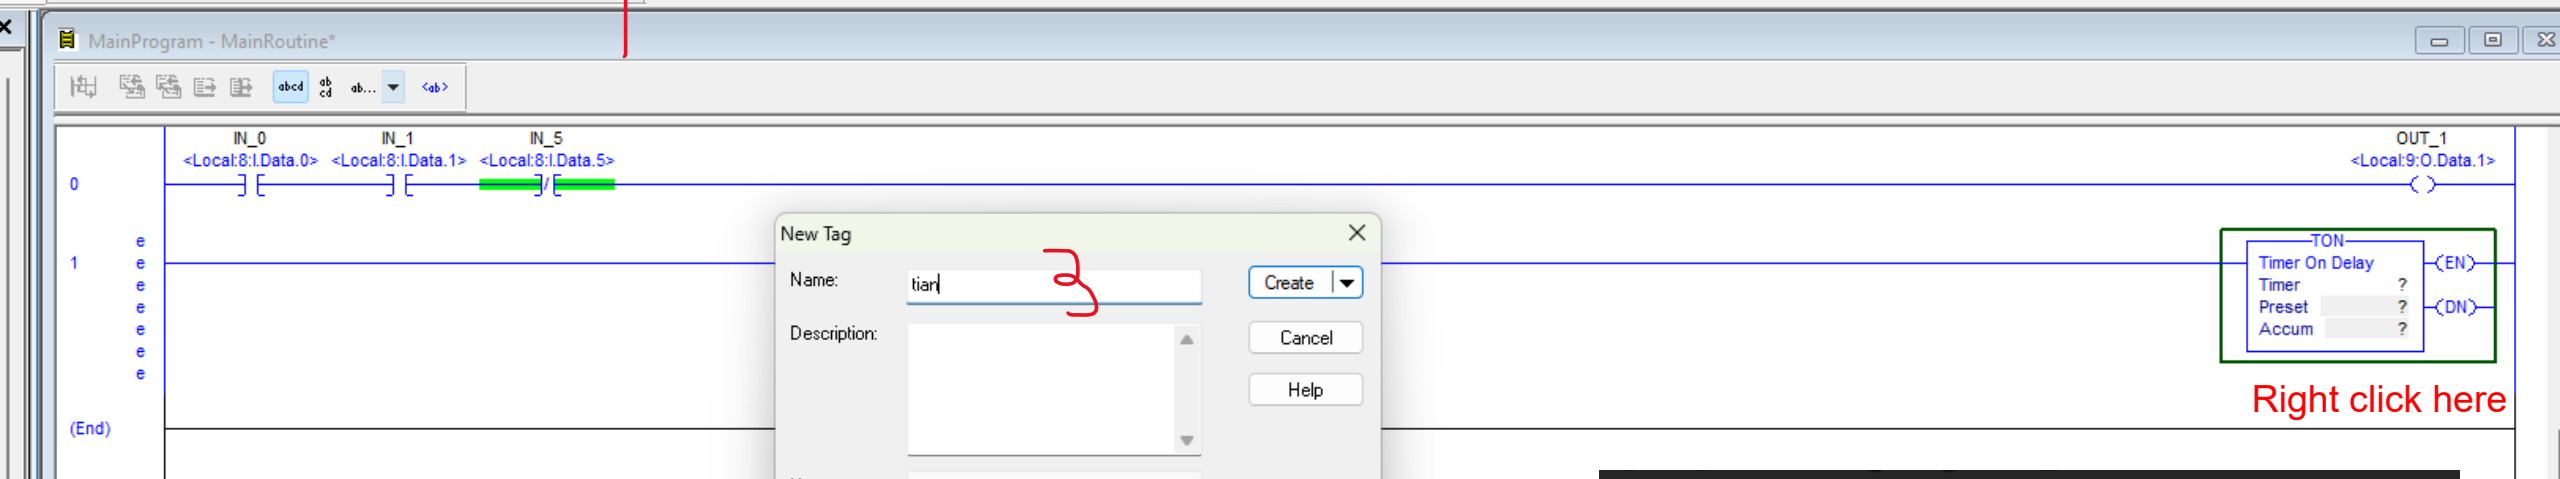

New Tag

Name: tiar

Description:

Usage: <normal>

Type: Base Connection...

Alias For:

Data Type: TIMER

Scope: MainProgram

External Access: Read/Write

Style:

☐ Constant

☐ Open Configuration

Create Cancel Help

T

Y. Enter Name Filter... Show: All Tags

Name	Data Type	Description
Local:9:I	AB:1756_DO...	
Local:9:O	AB:1756_DO...	
T	TIMER	
T.PRE	DINT	
T.ACC	DINT	
T.EN	BOOL	
T.TT	BOOL	
T.DN	BOOL	

Controller

Program

Task 2

- 3 TON timer are needed
- Use DN bit
- **one input**
- Switch – IN-4
- **three output**
- mixer A – OUT-0 mixer B – OUT-1 mixer C-OUT-2
- Switch ON -> (7s) -> mixer A ON -> (3.6s) -> mixer B ON -> (5s) -> mixer C ON

Task 3

- 3 TON timer are needed
- Use TT and DN bits
- **two inputs buttons**
- **Start** – IN-0 **Stop** – IN-1
- **three outputs**
- **Green** – OUT-0 **Yellow**-OUT-1 **Red** OUT-2
- Start -> **green on for 5s** -> **yellow on for 5s** -> **red on for 5s** ->push Start again to repeat the procedure
- (Stop button can stop it anytime)

Task 2

- 3 TON timer are needed
- Use DN bit
- **one input**
- **Switch** – IN-4
- **three output**
- **mixer A** – OUT-0 **mixer B** – OUT-1 **mixer C**-OUT-2
- Switch ON -> (7s) -> mixer A ON -> (3.6s) -> mixer B ON -> (5s) -> mixer C ON

Task 3

- 3 TON timer are needed
- Use TT and DN bits
- **two inputs buttons**
- **Start** – IN-0 **Stop** – IN-1
- **three outputs**
- **Green** – OUT-0 **Yellow**-OUT-1 **Red** OUT-2
- Start -> **green on for 5s** -> **green turns off** -> **yellow on for 5s** -> **yellow turns off** -> **red on for 5s** -> **red turns off** -> push Start again to repeat the procedure
- Stop button can stop it anytime