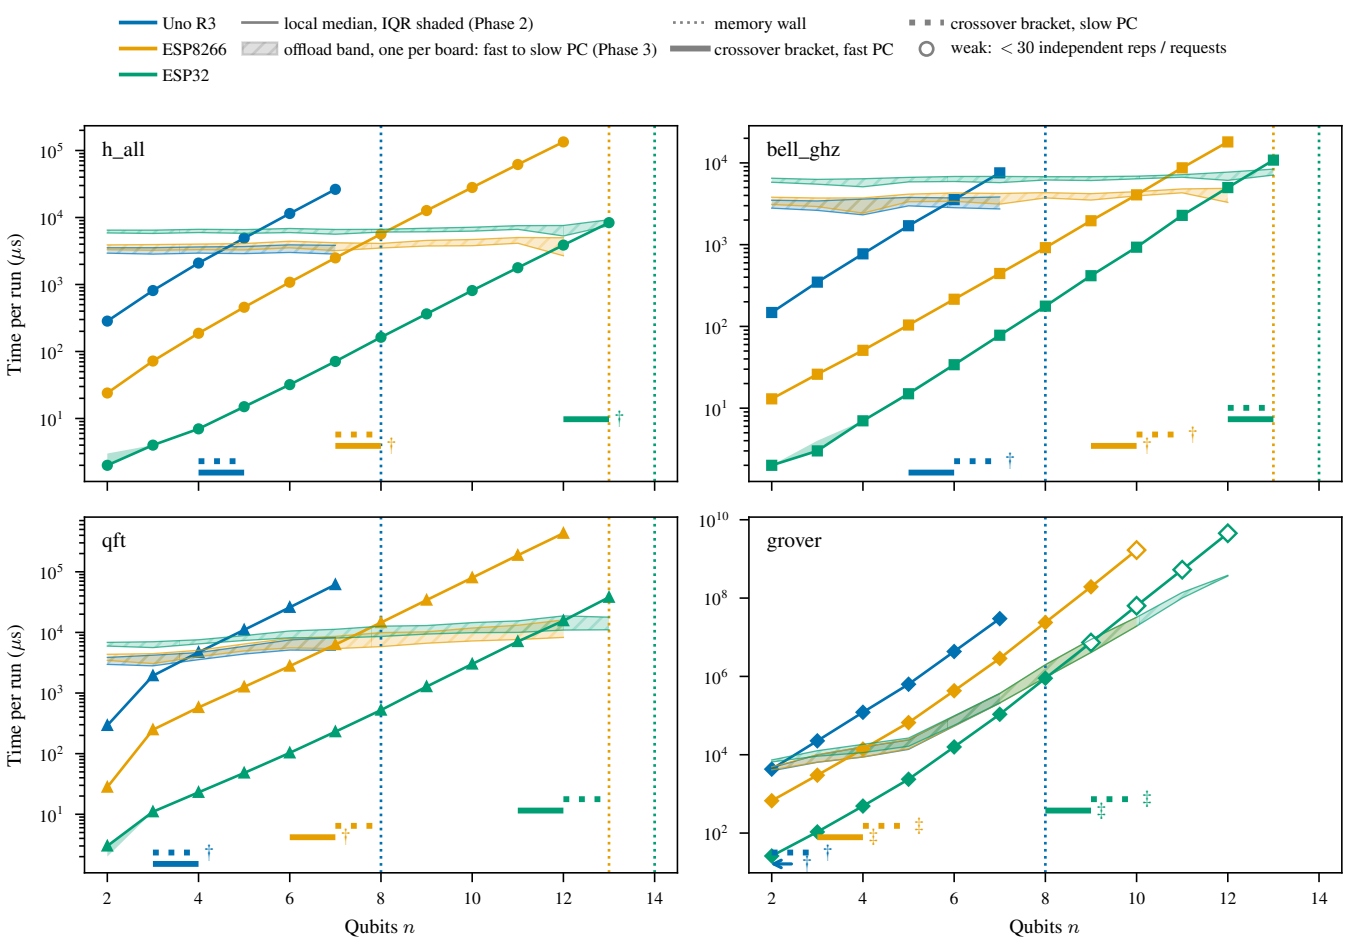
Uno R3
ESP8266
ESP32
local median, IQR shaded (Phase 2)
offload band, one per board: fast to slow PC (Phase 3)
memory wall
crossover bracket, fast PC
crossover bracket, slow PC
weak: < 30 independent reps / requests
h_all
bell_ghz
qft
grover
Time per run (μs)
Qubits n