


STM32F103 Midi USB Interface


This is a detailed description of how to compile and program an STM32F103C8T6 with the code from TheKikGen USBMidiKliK4x4 (<https://github.com/TheKikGen/USBMidiKliK4x4>) without having to touch the Boot jumpers on the STM32F103 board.

Midiklik 4x is an unusual MidiUSB interface because of the extensive number of options changeable via sysex commands. In the future it will replace an analog 4x4 Midi Crosspoint switch which was built in the early 1990's - probably with the addition of a touch LCD control surface.

01 Install the STM32CubeProgrammer from here (<https://www.st.com/en/development-tools/stm32cubeprog.html>) – you will have to supply an email to do so. You may want to inspect your sound devices and com ports present before the next steps. If necessary install MidiOX (<http://www.midiox.com/>) for more detailed information about your sound midi and synth devices.

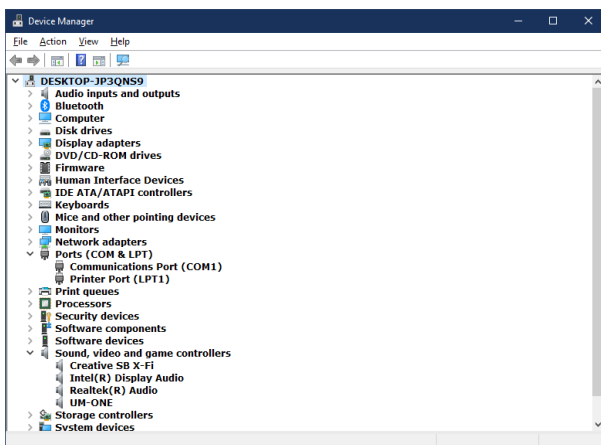


Devices before STM32F103C8T6 bootloader or Midi program

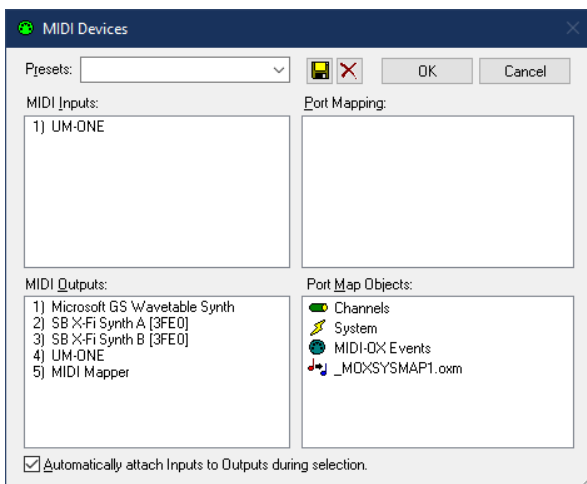


MidiOx Midi-devices before STM32F103C8T6 bootloader or Midi program


02 Connect the STM32F103 board to the J-Link and plug the J-Link into a USB port.

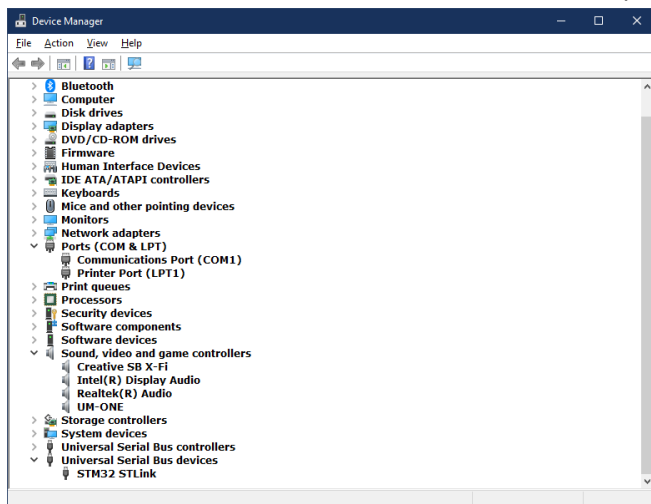

03 Open the STM32CubeProgrammer and click connect:

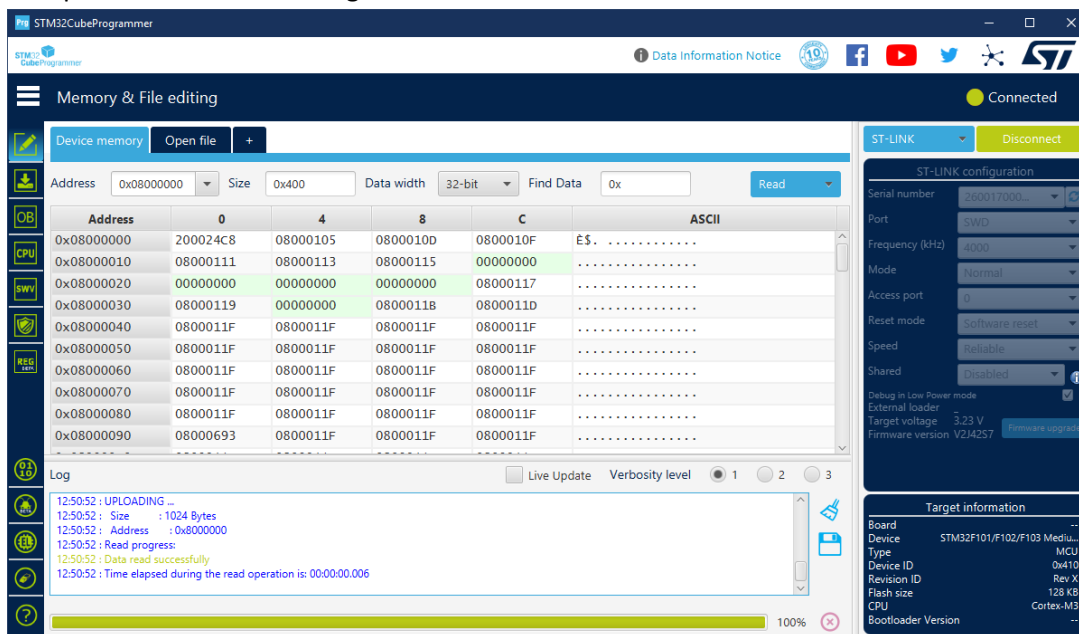


04 Then click green down-arrow and Open file then select hid bootloader file: tkg_hid_generic_pc13.bin

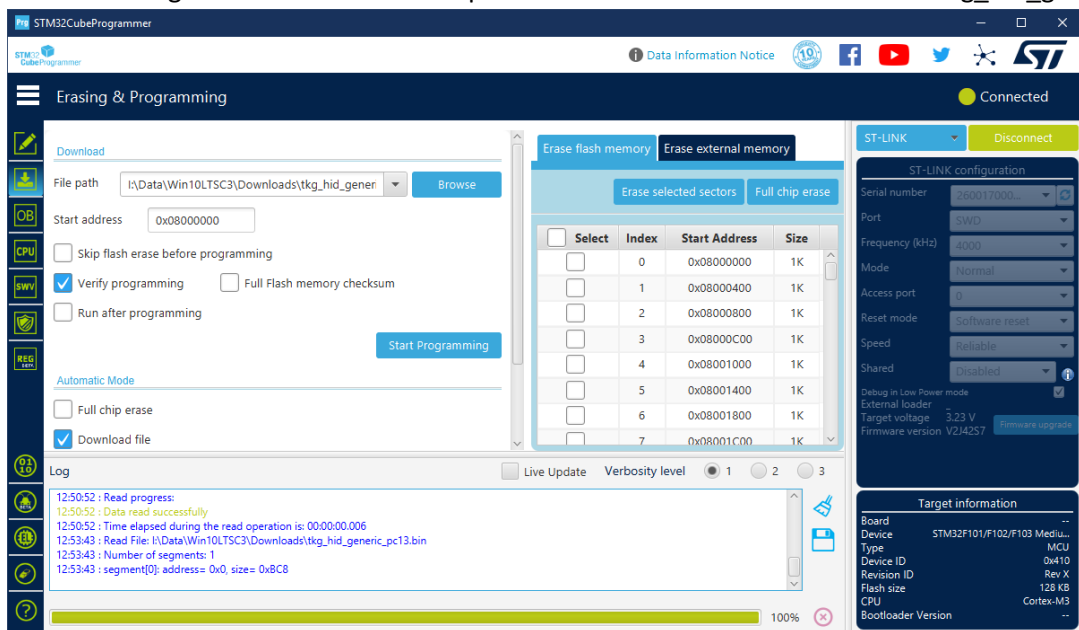

05 Click Start Programming and then clock ok twice. Then click Disconnect and close the STM32CubeProgrammer.

06 Disconnect the J-Link from the USB port and then disconnect it from the STM32F103 board.

07 Plug the STM32F103 board into a USB port:

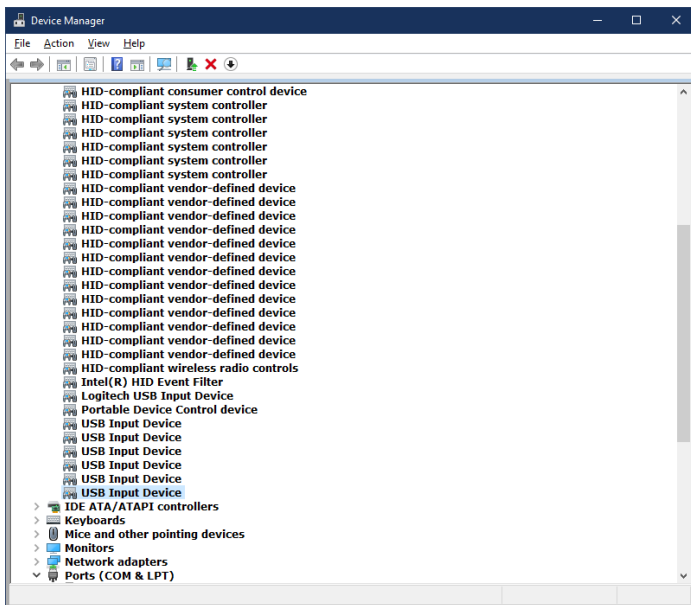

Device Name	Description	Device Type	Connected	Safe To U...	Disabled	USB Hub	Drive Lett...	Serial Number	Registry T...	Registry Time 2	VendorID	ProductID
Port_#0002.Hub...	USB Composite Device	Unknown	No	Yes	No	No		7651420	2023/07/08 ...	2023/07/05 ...	16c0	048a
0000.0014.000...	USB Serial Device	Communication	No	Yes	No	No	COM3		2023/07/08 ...	2023/07/05 ...	16c0	048a
0000.0014.000...	USB Audio Device	Audio	No	Yes	No	No			2023/07/08 ...	2023/07/05 ...	16c0	048a
0000.0014.000...	USB Audio Device	Audio	No	Yes	No	No			2023/07/08 ...	2023/07/05 ...	16c0	048a
Port_#0001.Hub...	USB Composite Device	Unknown	No	Yes	No	No		E660583883...	2023/07/23 ...	2023/05/23 ...	239a	cafe
0000.0014.000...	USB Input Device	HID (Human Interf...	No	Yes	No	No			2023/07/23 ...	2023/07/23 ...	239a	cafe
0000.0014.000...	USB Serial Device	Communication	No	Yes	No	No	COM7		2023/07/23 ...	2023/05/23 ...	239a	cafe
Port_#0009.Hub...	Unknown USB Device (...)	Unknown	No	No	No	No			2023/09/02 ...	2023/09/02 ...	0000	0004
Port_#0002.Hub...	USB Serial Device	Communication	No	Yes	No	No	COM12	3d7a02	2023/09/05 ...	2023/09/05 ...	0483	5740
Port_#0001.Hub...	STM32 Bootloader	Vendor Specific	No	No	No	No			2023/09/06 ...	2023/09/02 ...	0483	3748
Port_#0002.Hub...	STM32 Bootloader	Application Specific	No	No	No	No		3d7a02	2023/09/06 ...	2023/09/04 ...	0483	d811
Port_#0002.Hub...	Maple 003	Communication	No	No	No	No	COM13	LLM_003	2023/09/06 ...	2023/09/06 ...	1eaf	0003
Port_#0002.Hub...	STM Serial	Communication	No	Yes	No	No		04JH00	2023/09/07 ...	2023/09/07 ...	0483	5740
Port_#0009.Hub...	USB Composite Device	Unknown	No	Yes	No	No			2023/09/27 ...	2023/09/27 ...	2912	1970
0000.0014.000...	USB Audio Device	Audio	No	Yes	No	No			2023/09/27 ...	2023/09/27 ...	2912	1970
Port_#0002.Hub...	USB Composite Device	Unknown	No	Yes	No	No			2023/09/27 ...	2023/09/27 ...	ffff	ffff
0000.0014.000...	USB Audio Device	Audio	No	Yes	No	No			2023/09/27 ...	2023/09/27 ...	ffff	ffff
TKGL BTL	USB Input Device	HID (Human Interf...	Yes	Yes	No	No			2023/09/28 ...	2022/05/31 ...	048d	5702
UM-ONE	UM-ONE	Vendor Specific	Yes	Yes	No	No			2023/09/28 ...	2022/05/31 ...	0582	012a
Port_#0008.Hub...	Generic USB Hub	Unknown	Yes	Yes	No	No			2023/09/28 ...	2023/03/15 ...	067b	2506
Port_#0011.Hub...	Generic USB Hub	Unknown	Yes	Yes	No	No			2023/09/28 ...	2022/05/31 ...	05a3	0608
Wireless keyboa...	USB Composite Device	Unknown	Yes	Yes	No	No			2023/09/28 ...	2023/03/15 ...	1a81	1006
Wireless keyboa...	USB Input Device	HID (Human Interf...	Yes	Yes	No	No			2023/09/28 ...	2023/09/28 ...	1a81	1006
Wireless keyboa...	USB Input Device	HID (Human Interf...	Yes	Yes	No	No			2023/09/28 ...	2023/09/28 ...	1a81	1006
USB Receiver	USB Composite Device	Unknown	Yes	Yes	No	No			2023/09/28 ...	2023/03/15 ...	046d	c52b
USB Receiver	Logitech USB Input De...	HID (Human Interf...	Yes	Yes	No	No			2023/09/28 ...	2023/09/28 ...	046d	c52b
USB Receiver	USB Input Device	HID (Human Interf...	Yes	Yes	No	No			2023/09/28 ...	2023/09/28 ...	046d	c52b
USB Receiver	USB Input Device	HID (Human Interf...	Yes	Yes	No	No			2023/09/28 ...	2023/09/28 ...	046d	c52b
Port_#0003.Hub...	Intel(R) Wireless Blue...	Bluetooth Device	Yes	No	No	No			2023/09/28 ...	2022/06/08 ...	9087	0025
Port_#0002.Hub...	Kell MCBSTM32 Disk U...	Mass Storage	No	Yes	No	No	D:	0001A0000000	2023/09/28 ...	2023/09/28 ...	c251	1c03
Port_#0002.Hub...	Unknown USB Device (...)	Unknown	No	No	No	No			2023/09/28 ...	2023/09/28 ...	0000	0002
Port_#0002.Hub...	Maple Serial	Communication	No	Yes	No	No	COM14		2023/09/28 ...	2023/09/27 ...	1eaf	0004
Port_#0002.Hub...	USB Composite Device	Unknown	No	Yes	No	No			2023/09/28 ...	2023/09/03 ...	2912	1970
0000.0014.000...	USB Audio Device	Audio	No	Yes	No	No			2023/09/28 ...	2023/09/03 ...	2912	1970
Port_#0002.Hub...	Unknown USB Device (...)	Unknown	No	No	No	No			2023/09/28 ...	2023/09/28 ...	0000	0001
TKGL BTL	USB Input Device	HID (Human Interf...	Yes	Yes	No	No			2023/09/28 ...	2023/09/28 ...	1209	beba


TKGL BTL USB Input Device HID (Human Interface Device) Yes Yes No No 2023/09/28 13:05:46
 2023/09/28 12:27:06 1209 beba 3.10 03 00 00 DESKTOP-JP3QNS9
 7&39c0ec5d&1 HidUsb @input.inf,%HID.SvcDesc%;Microsoft HID Class Driver hidusb.sys (Standard system devices)
 100 mA 1.10 USB Input Device 10.0.17763.3650 HID_Inst.NT input.inf USB\VID_1209&PID_BEBA\6&14d85440&0&2
 Removable, SurpriseRemovalOK 2023/09/28 12:27:06 2023/09/28 12:27:06 2023/09/28 13:05:46

08 Install Arduino 1.8.19 (<https://www.arduino.cc/en/software>).

09 Download the MidiUSB4x4 repository (<https://github.com/TheKikGen/USBMidiKliK4x4>) as a zip file and unzip it underneath your My Documents/Arduino/ folder. Rename the folder as UsbMidiKliK4x4 and you can then delete the bin and doc folders, and the .gitignore and README.md files. Replace three of the original files with the ones I have edited (usb_midi_device.h, hardware_config.h, UsbMidiKliK4x4.ino) - or do your own editing on the original files.


10 Download the two repositories midiXparser (<https://github.com/TheKikGen/midiXparser>) and Pulseout (<https://github.com/TheKikGen/PulseOut>) as zip files and extract them underneath your My Documents/Arduino/libraries/ folder as midiXparser and Pulseout folders. Double click on UsbMidiKliK4x4.ino to open the Arduino IDE.

11 Install the Arduino SAM boards (Cortex-M3) board as explained here (<https://github.com/TheKikGen/USBMidiKliK4x4/wiki/Build-UsbMidiKliK4x4-from-sources>) and here (https://github.com/rogerclarkmelbourne/Arduino_STM32/wiki/Installation). Click [Install] and [Close]

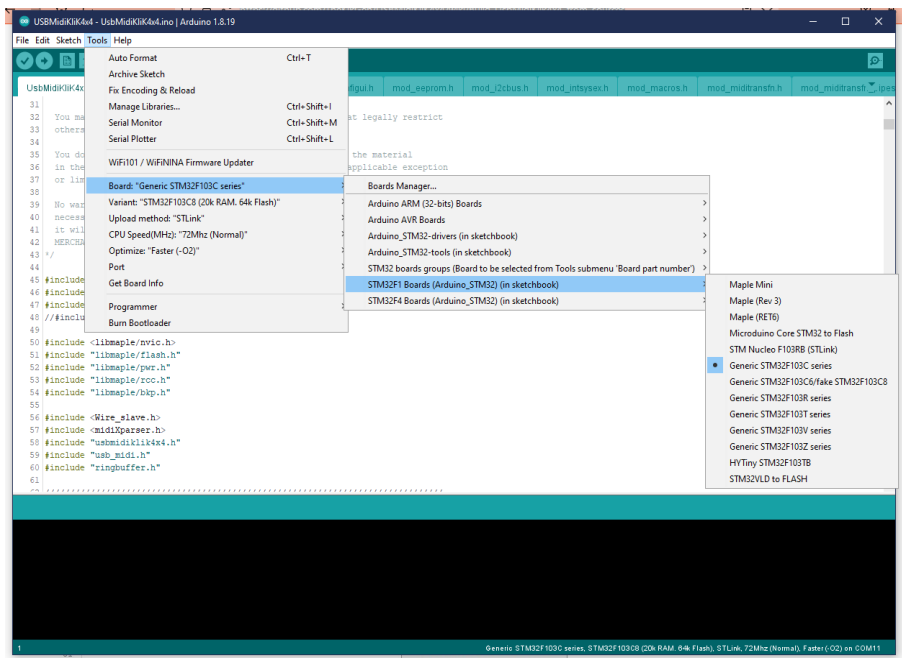


14 Also in the Tool menu select:

- . "Faster -O2" as optimize option
- . "72 Mhz" as CPU speed
- . "HID bootloader" as upload method

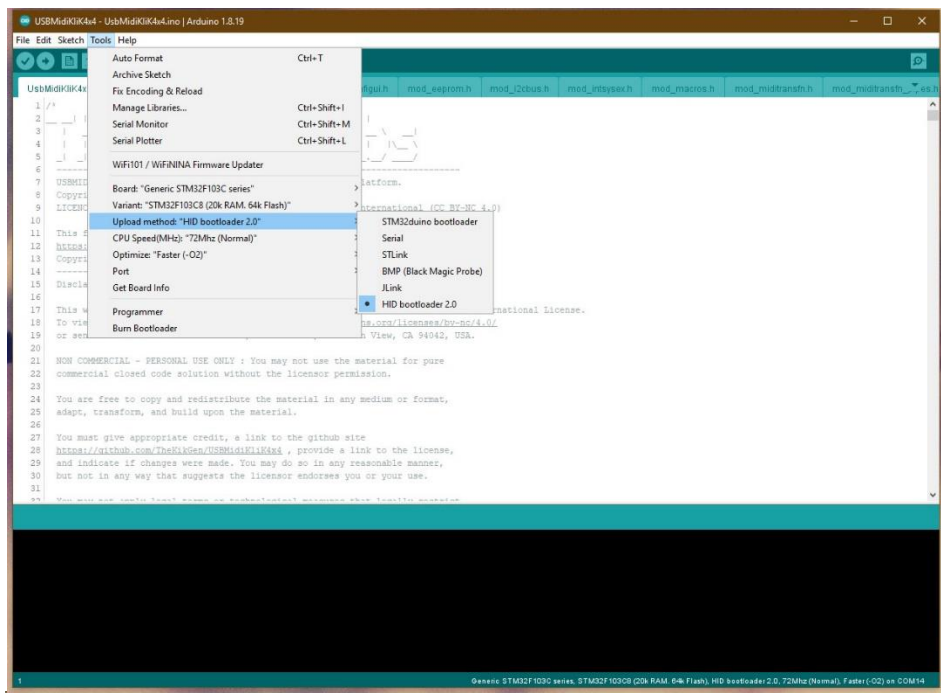

15 Press Compile then press the reset button on the board twice and then press upload:

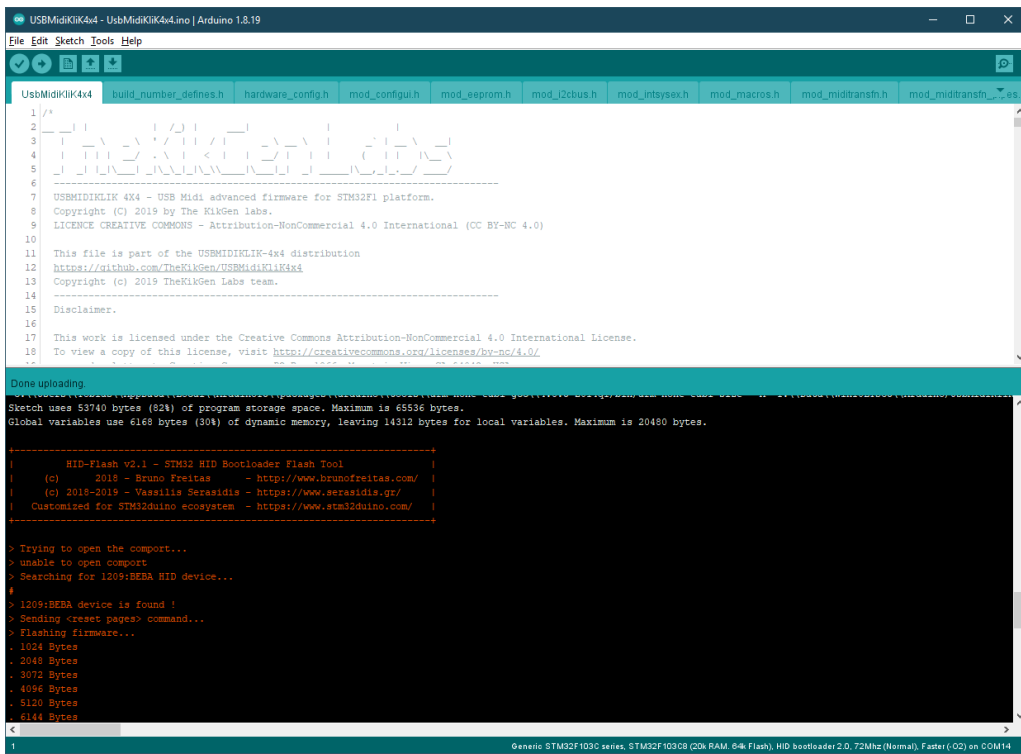

```

+-----+
|               HID-Flash v2.1 - STM32 HID Bootloader Flash Tool               |
|      (c)      2018 - Bruno Freitas      - http://www.brunofreitas.com/      |
|      (c) 2018-2019 - Vassilis Serasidis - https://www.serasidis.gr/        |
|      Customized for STM32duino ecosystem - https://www.stm32duino.com/      |
+-----+

```


```


> Trying to open the comports...
> unable to open comports
> Searching for 1209:BEBA HID device...
#
> 1209:BEBA device is found !
> Sending <reset pages> command...
> Flashing firmware...
. 1024 Bytes
. 2048 Bytes
. 3072 Bytes
.....
. 52224 Bytes
. 53248 Bytes
. 54272 Bytes

> Done!
> Sending <reboot mcu> command...

```

16 Close the Arduino IDE and press the reset button on the board once:

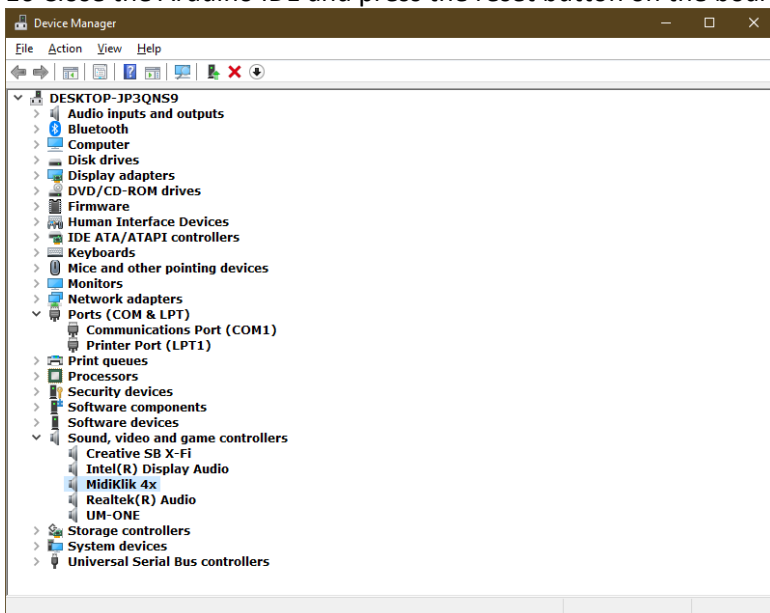

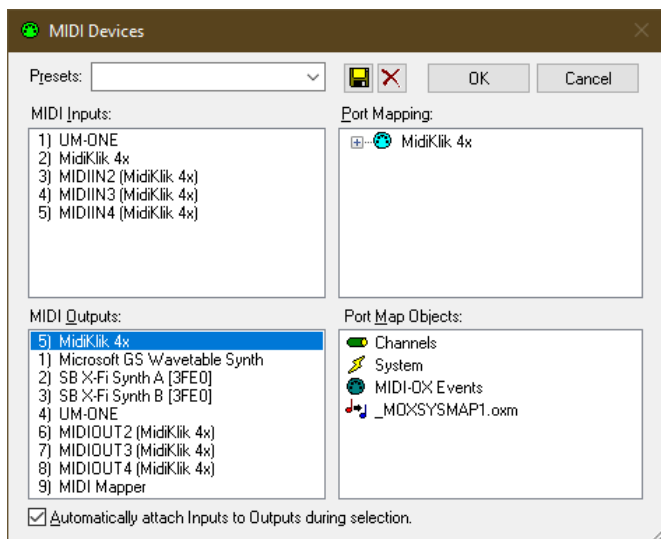

MidiOx Midi-devices after STM32F103C8T6 Midi programmed

