


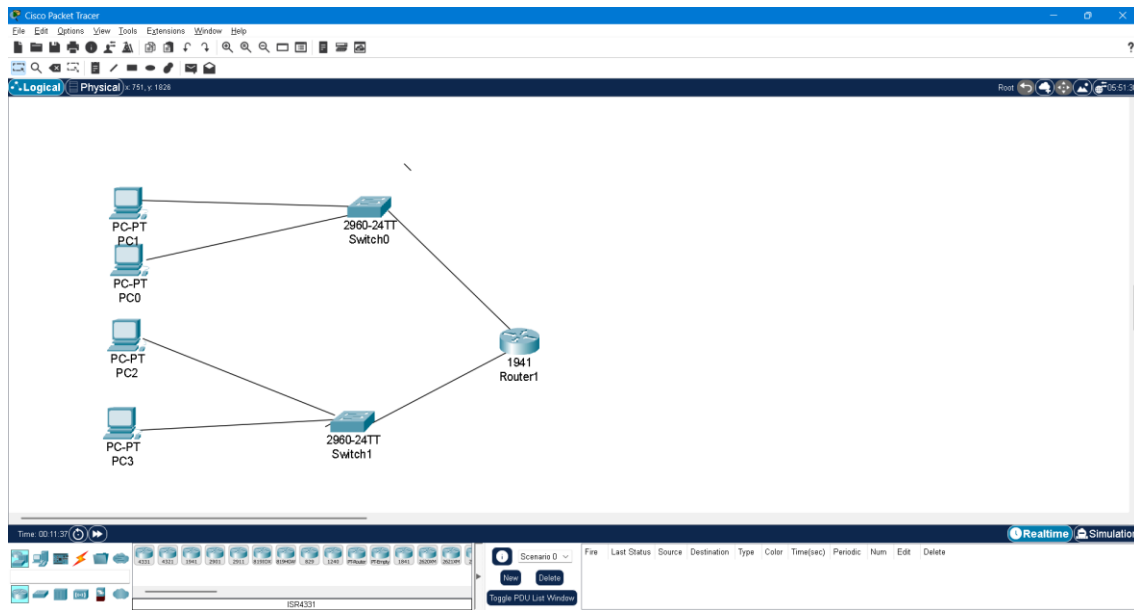

Configuração de IP nos PCs

Para cada PC, configure os endereços IP e Gateway da seguinte forma:

Sub-rede A (192.168.10.0/24)

PC1

IP Address: 192.168.10.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.10.1

PC2

IP Address: 192.168.10.3

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.10.1

Sub-rede B (192.168.20.0/24)

PC3

IP Address: 192.168.20.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.20.1

PC4

IP Address: 192.168.20.3

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.20.1

Configuração do Roteador

Interface GigabitEthernet 0/0 (para Sub-rede A):

IP Address: 192.168.10.1

Subnet Mask: 255.255.255.0

Status: ON

Interface GigabitEthernet 0/1 (para Sub-rede B):

IP Address: 192.168.20.1

Subnet Mask: 255.255.255.0

Status: ON

Testando a Conectividade

Em cada PC, abra o Command Prompt.

Teste a comunicação dentro da mesma sub-rede:


ping 192.168.10.3 (de PC1 para PC2)

ping 192.168.20.3 (de PC3 para PC4)

Teste a comunicação entre sub-redes:

ping 192.168.20.2 (de PC1 para PC3)

ping 192.168.10.2 (de PC3 para PC1)

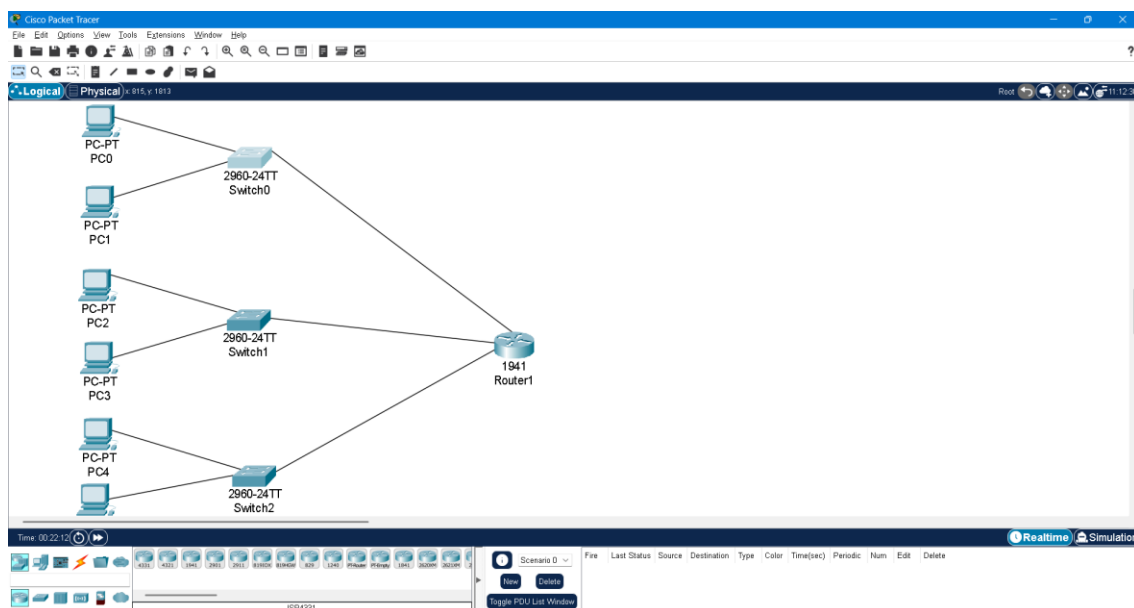

PC5

IP Address: 192.168.30.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.30.1

PC6

IP Address: 192.168.30.3

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.30.1

PC5

IP Address: 192.168.30.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.30.1

PC6

IP Address: 192.168.30.3

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.30.1