# UNIVERSITY OF CHITTAGONG
## Department of Computer Science & Engineering

**IoT Project Report: Fire Fighting Robot**

**Presented By:**

**Group: D1**
Sadia Afroj -21701031
Md. Shoaib-21701032
Misba Ul Hoque Arafat-21701033
Afroza Khanam Shati-21701034
Tonmoy Roy-21701035 (group leader)
Jahirul Islam-21701037

**Project Submitted to:**

Nasrin Sultana, Assistant Professor,
Computer Science and Engineering,
University of Chittagong, Chittagong-4331

1. **Project Name: Fire Fighting Robot**
2. **Components Required**
   - NodeMCU esp8266
   - USB – A to micro-USB cable
   - Car chassis
   - L298 motor driver module
   - Flame sensor module
   - Servo Motor
   - Relay Module
   - Buzzer
   - Green LED
   - Red LED
   - Mini DC Submersible Pump
   - 12V Battery
   - On-Off- Switch
   - DC Female Connector Jack
   - Connecting wires
   - Soldering iron
   - Solder wire
   - Hot Melt Glue Gun


   - **Software Required**
   - Arduino IDE

## 3. Objective

- Design and development of low-cost firefighting robot.
- Run automatic and manual firefighting robot.
- Fire Alarm system
- Send mail to the owner.
- Extinguish fire.

## 4. Introduction

Many fire disasters occur worldwide, resulting in high losses of buildings, factories, etc. Fire is often uncontrollable in buildings and many other places due to fewer sources. It's hard to access the internal building rooms for firefighters due to high temperatures. There must also be many explosive materials that may result in large-scale complications. According to reports over 1.6 million fire incidents occur which results in 27,027 deaths. Looking at these problems faced by Bangladeshi firefighters, the robot is used to extinguish the fire by entering various buildings through a distance to reduce risk. The movements are controlled through a smartphone via Node MCU ESP8266. The 12V water pump is used as an extinguisher to extinguish the fire which is in direct phase with the battery. We've used a flame sensor to sense the fire by emission of visible UV and IR radiation. L298N driver IC is used for the movement of the motors commanding to move forward, backward, left, right, and stop. The robot was equipped with a 12V Battery, regulating 5V supply and producing 5V to onboard LED. In the fire examination, the robot can perform the task of fire extinguishing properly.

# 5. Circuit Diagram



Fire Fighting Robot Circuit Diagram.
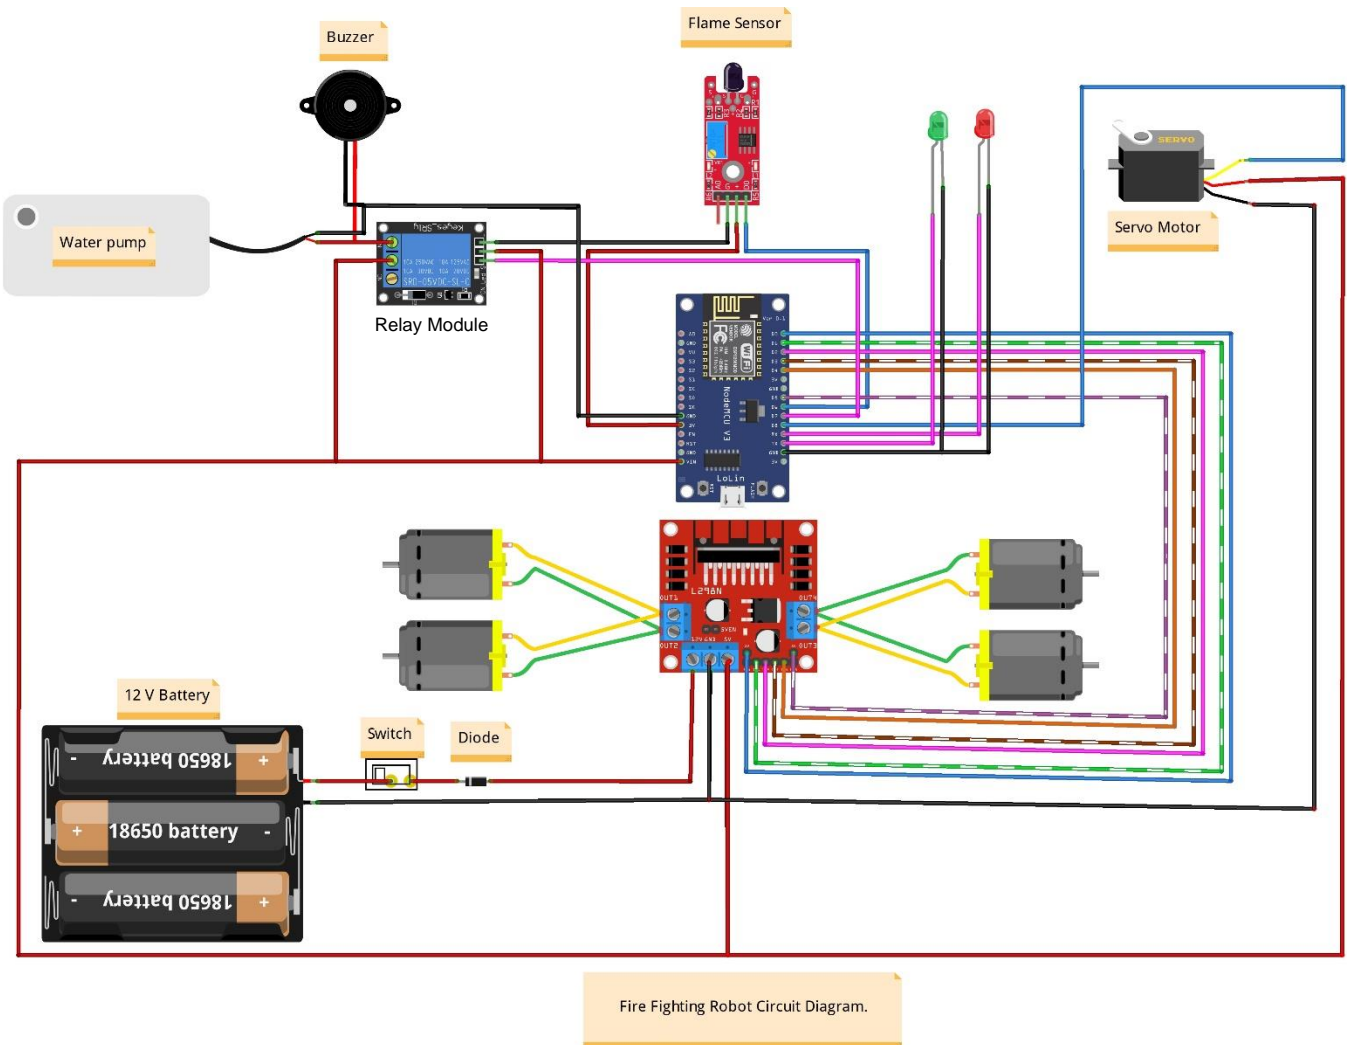
# 6. Code

```
#define BLYNK_PRINT Serial
#include <Servo.h>
#include <ESP8266WiFi.h>
#include <BlynkSimpleEsp8266.h>

//Motor PINs
#define ENA D0
#define IN1 D1
#define IN2 D2
#define IN3 D3
#define IN4 D4
#define ENB D5
```

```
Servo motor1;
int F_sensor=12;
int pump=13;//buzzer also
int servopin=15;
int green_led=3;
int red_led=1;

bool forward = 0;
bool backward = 0;
bool left = 0;
bool right = 0;
int Speed;

char auth[] = "*******"; //Enter your Blynk application auth token
char ssid[] = "*******"; //Enter your WIFI name
char pass[] = "*******"; //Enter your WIFI passowrd


void setup() {
//Initialize the serial monitor
  Serial.begin(115200);
//Set the motor pins as the output pin
  pinMode(ENA, OUTPUT);
  pinMode(IN1, OUTPUT);
  pinMode(IN2, OUTPUT);
  pinMode(IN3, OUTPUT);
  pinMode(IN4, OUTPUT);
  pinMode(ENB, OUTPUT);

  motor1.attach(servopin);
  pinMode(pump, OUTPUT);
  pinMode(green_led, OUTPUT);
  pinMode(red_led, OUTPUT);


//Initialize the blynk communication
  Blynk.begin(auth, ssid, pass);
}


void put_off_fire() {

    delay (500);

    Stop();

   delay(500);

   digitalWrite(pump, HIGH); delay(500);

  for (pos = 50; pos <= 130; pos += 1) {

    myservo.write(pos);
```

```
    delay(10);

  }

  for (pos = 130; pos >= 50; pos -= 1) {

    myservo.write(pos);

    delay(10);

  }

  digitalWrite(pump,LOW);

  myservo.write(90);


}
void cradle() {
//you begin your own personal code for servo here
  int pos;
  digitalWrite(pump,HIGH);
  for (pos = 40; pos <= 140; pos ++) { // goes from 40 degrees to 140 degrees
    // in steps of 1 degree
    motor1.write(pos);                 // tell servo to go to position in
variable 'pos'
    delay(10);                          // waits 15ms for the servo to reach the
position
  }
  for (pos = 140; pos >=40; pos --) { // goes from 140 degrees to 40 degrees
    motor1.write(pos);                 // tell servo to go to position in
variable 'pos'
    delay(10);                          // waits 15ms for the servo to reach the
position
  }
digitalWrite(pump,LOW);
delay(10);

//your personal code for servo should end here
}


void automatic(){

  while(digitalRead(F_sensor)){
    digitalWrite(red_led,HIGH);
    Blynk.logEvent("fire_alarm","Fire Fire!!!");
    put_off_fire();
  }
  digitalWrite(led,LOW);
}

//Get values from the widgets
BLYNK_WRITE(V0) {
```

```
    forward = param.asInt();
}

BLYNK_WRITE(V1) {
  backward = param.asInt();
}

BLYNK_WRITE(V2) {
  left = param.asInt();
}

BLYNK_WRITE(V3) {
  right = param.asInt();
}

BLYNK_WRITE(V4) {
  Speed = param.asInt();
}

//Extinguish fire
BLYNK_WRITE(V5)
{
  int pinValue = param.asInt();
  if (pinValue == 1) {    // if Button sends 1
    Serial.println("servo and led is on");
    digitalWrite(red_led,HIGH);
    digitalWrite(green_led,LOW);
    Blynk.logEvent("fire_alarm","Fire Fire!!!");

    cradle();              // start the function cradle
    Blynk.run(); // Run rest of show in-between waiting for this loop to
repeat or quit.
    int pinValue = 0;  // Set V5 status to 0 to quit, unless button is still
pushed (as per below)
    Blynk.syncVirtual(V5); // ...Then force BLYNK_WRITE(V0) function check of
button status to determine if repeating or done.
  }
  else{
    digitalWrite(red_led,LOW);
    digitalWrite(green_led,HIGH);
    digitalWrite(pump,LOW);

    Serial.println("servo and led is off");

  }
}
//Autonomous mode
BLYNK_WRITE(V6)
{
  int pinValue = param.asInt();
  if (pinValue == 1) {    // if Button sends 1
    if (digitalRead(F_sensor) ==0) //If Fire not detected all sensors are
zero
```

```
    {

    //Do not move the robot
        digitalWrite(green_led,HIGH);
        digitalWrite(red_led,LOW);
        Stop();


    }
else if (digitalRead(F_sensor) ==1) //If Fire is straight ahead

    {

     //Move the robot forward
        digitalWrite(green_led,LOW);
        digitalWrite(red_led,HIGH);
        Blynk.logEvent("fire_alarm","Fire Fire!!!");
        Forward();

    }
    delay(300); //Slow down the speed of robot
    automatic();              // start the function put_off_fire
    Blynk.run(); // Run rest of show in-between waiting for this loop to
 repeat or quit.
    int pinValue = 0;  // Set V6 status to 0 to quit, unless button is still
 pushed (as per below)
    Blynk.syncVirtual(V6);

  }
  else{
    Serial.println("auto servo and led is off");
  }
}

//Check widget values using the IF condition
void smartcar() {
  if (forward == 1) {
    Forward();
    Serial.println("Forward");
  } else if (backward == 1) {
    Backward();
    Serial.println("Backward");
  } else if (left == 1) {
    Left();
    Serial.println("Left");
  } else if (right == 1) {
    Right();
    Serial.println("Right");
  } else if (forward == 0 && backward == 0 && left == 0 && right == 0) {
    Stop();
    Serial.println("Stop");
  }
}

 void loop() {
```

```
//Run the blynk library
  Blynk.run();
  smartcar();
  if(digitalRead(F_sensor)==0){
     digitalWrite(green_led,HIGH)
 }
//Motor control functions
void Forward() {
  analogWrite(ENA, Speed);
  analogWrite(ENB, Speed);
  digitalWrite(IN1, LOW);
  digitalWrite(IN2, HIGH);
  digitalWrite(IN3, HIGH);
  digitalWrite(IN4, LOW);
}
void Backward() {
  analogWrite(ENA, Speed);
  analogWrite(ENB, Speed);
  digitalWrite(IN1, HIGH);
  digitalWrite(IN2, LOW);
  digitalWrite(IN3, LOW);
  digitalWrite(IN4, HIGH);
}
void Left() {
  analogWrite(ENA, Speed);
  analogWrite(ENB, Speed);
  digitalWrite(IN1, HIGH);
  digitalWrite(IN2, LOW);
  digitalWrite(IN3, HIGH);
  digitalWrite(IN4, LOW);
}
void Right() {
  analogWrite(ENA, Speed);
  analogWrite(ENB, Speed);
  digitalWrite(IN1, LOW);
  digitalWrite(IN2, HIGH);
  digitalWrite(IN3, LOW);
  digitalWrite(IN4, HIGH);
}
void Stop() {
  digitalWrite(IN1, LOW);
  digitalWrite(IN2, LOW);
  digitalWrite(IN3, LOW);
  digitalWrite(IN4, LOW);
}
```

## 7. Working

So, in the working of Fire fighter robot, we are providing the algorithm first so you can have an idea about the basic working of the robot.

There we are using one IR flame sensor which is continuously seeking for fire or flame. The IR Flame sensor senses the warmth and heat of anybody. and we coded this sensor so that it could sense the flame around it. The sensor is always searching for fire, if the sensor finds it the robot will turn and start walking toward the fire.

How does it work? The flame sensor senses the fire and sends the information to the NodeMCU which is the brain of this robot. The brain will act according to the condition and information obtained from the sensor. NodeMCU will give commands to the Motors to start in the walk in the desired direction.

The robot will stop near the fire and start watering it till the fire will be under control.

## 8. Application

- Fire fighter robot can be used in the Areas where a can't go

- Fire fighter robot use in war

- Fire fighter robot can be used in big kitchen.

- Fire fighter robot can be used it Restaurent