Tasmota-Plus Smart 4-Channel Switch/Relay
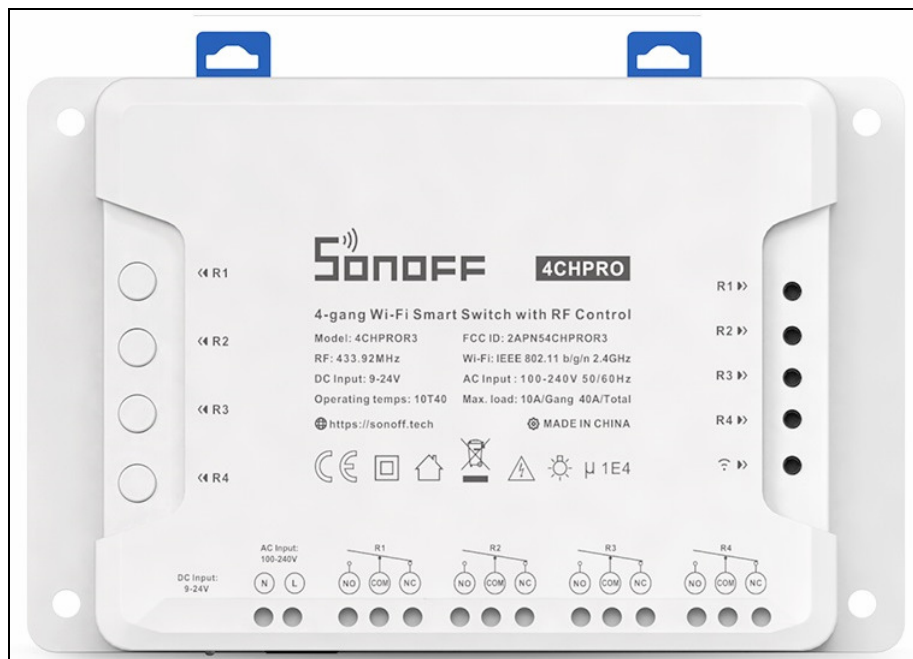
SS-4CHPro
User Guide

Latest Version of this document available at:
https://github.com/UBWH/ubwh.github.io/blob/master/assets/UserGuides

Table of Contents

Introduction

The SS-4CHPro is a WiFi connected Smart 4-Channel Switch/Relay[1], with **Tasmota-Plus**[2] installed.
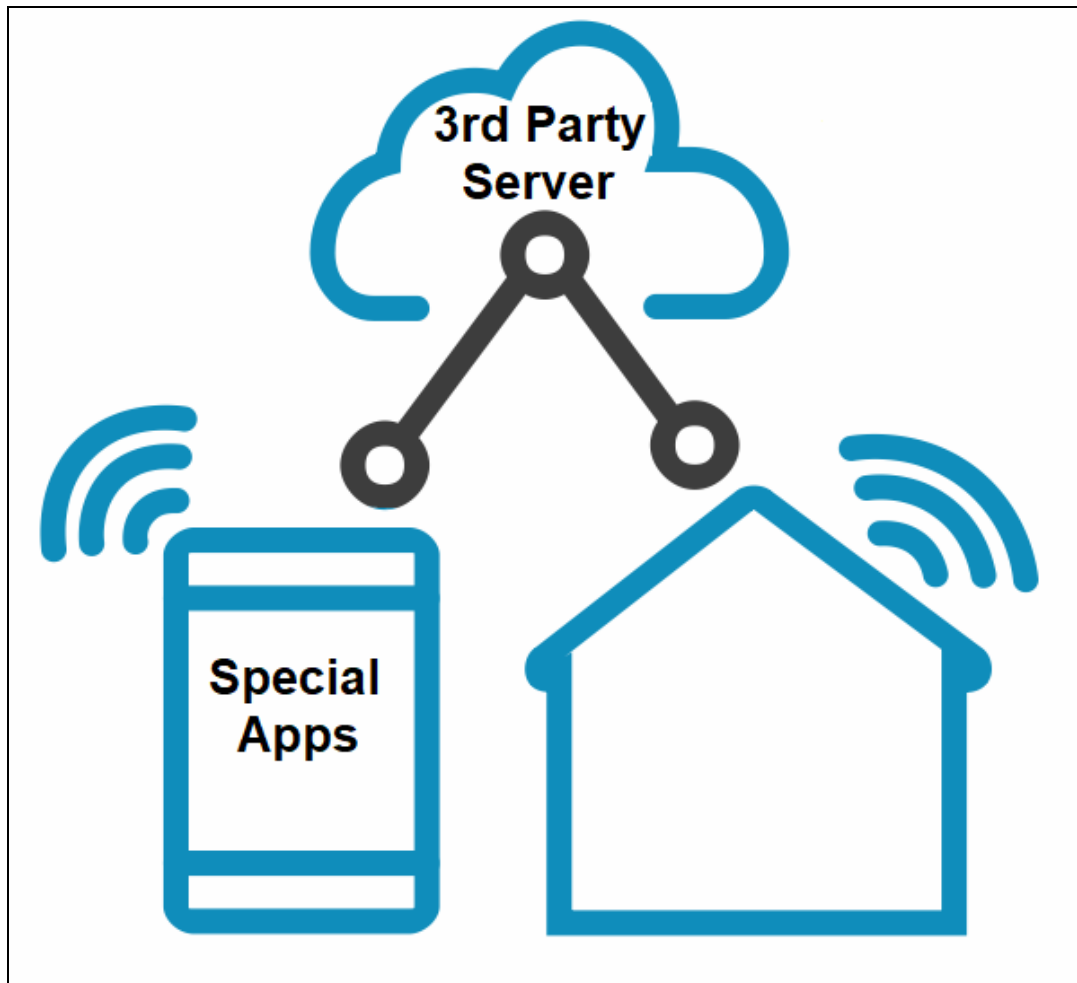
Common Smart Devices

Figure 1 - Common Smart devices require a 3rd Party server, and special apps.

Common Smart devices are designed to only work via the manufacturer's server and with special apps; the user never communicates directly with the device.

While this works well for home users, power users may prefer to directly control the device using a simple http:// (web) interface.

---

[1] In this document, the terms Switch and Relay will be used interchangeably.

[2] An enhanced version of Tasmota (https://tasmota.github.io/docs/)

Tasmota Smart Devices

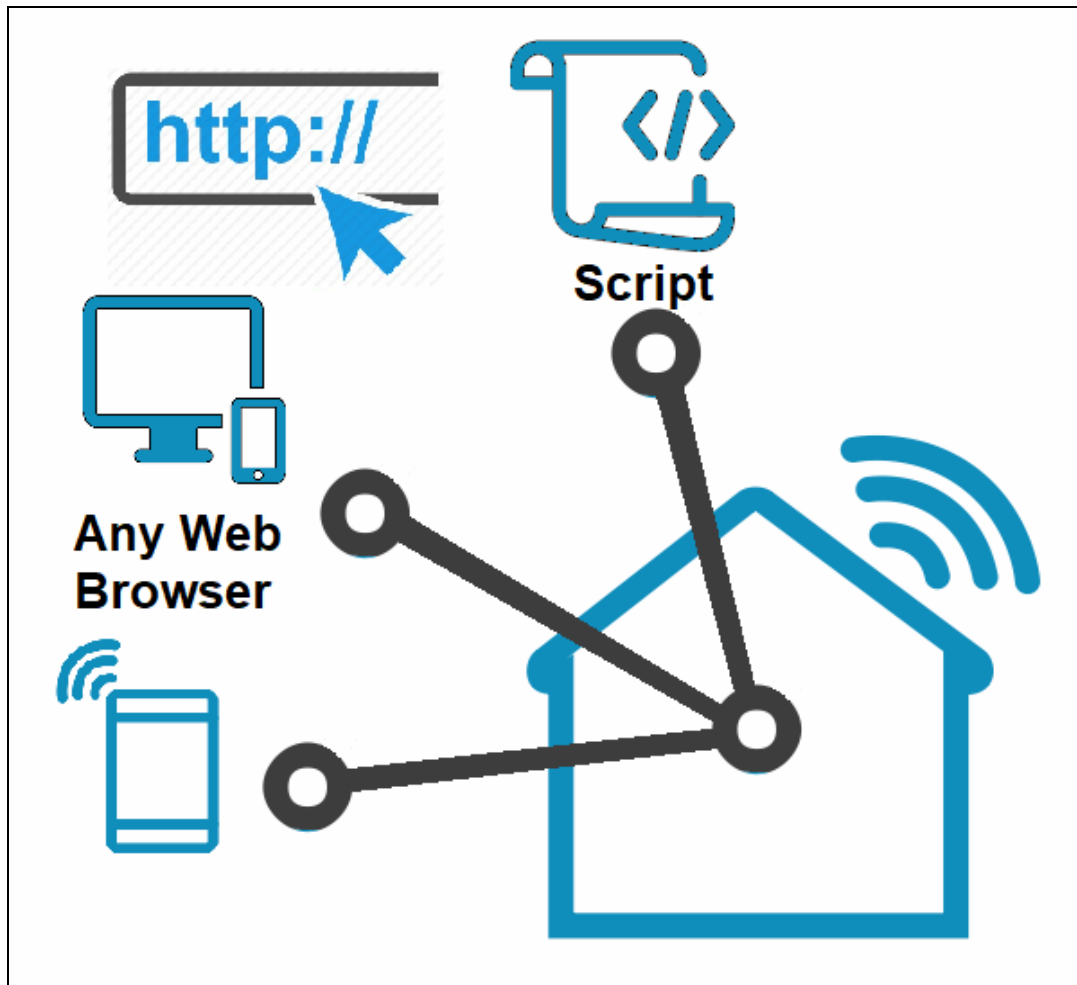**Figure 2 - Tasmota Smart devices can be directly controlled. No special app or server required.**

Tasmota gives direct access to the device via simple http:// web access.

The value of this for power users is that the device can be controlled using:

- Web browser interface.

- `http://` Command Interface. Ideal for control by external scripts.

More information: https://tasmota.github.io/docs/

Tasmota-Plus Smart Devices

Figure 3 – Tasmota-Plus Smart devices have extra features

Tasmota-Plus adds the following features to standard Tasmota.

Ping Watchdog

Ping Watchdog

There are 4 Ping Watchdogs for use. These are configured using the **Configure Watchdog** page.

Enable this Watchdog?
Only enabled Watchdogs operate.

Switch (Relay) Number
If the selected relay is not ON, then the Watchdog is disabled.

Number of Pings at **Interval (seconds)**
The device will continuously send the requested number of Pings at the requested intervals. If ALL Pings fail, the Watchdog fires. If any of the Pings succeed, the Watchdog resets and starts a new cycle.

IP V4 Address
A valid IPV4 address must be entered here.
IPV6 addresses & host names are not supported.

Cycle Seconds
If the Watchdog fires (i.e. the Pings failed), then the specified relay will be turned OFF for the requested seconds, then turned ON.

WAN Security

Tasmota supports remote commands, with optional login credentials, that can query and change parameters. For example this URL will turn the Relay 1 ON:

`http://<LAN.device.ip.address>/cm?user=admin&password=joker&cmnd=power1%20on`

If the device is to be managed remotely, a port forwarding firewall rule can be created. e.g. WAN Port 8080 ➔ LAN.address.of.device:80
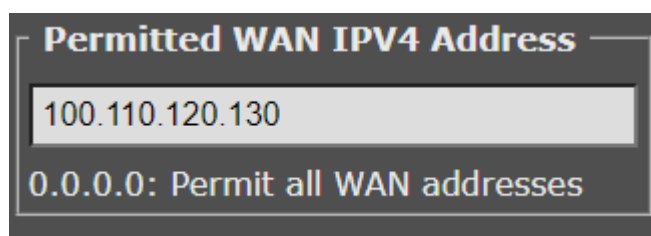
In this case the following URL will also work:

`http://<WAN.ip.address>:8080/cm?user=admin&password=joker&cmnd=power1%20`

However there is a new risk in that the credentials are sent in clear text.

Tasmota-Plus has a WAN Security feature where WAN requests not originating from a specified IP address can be blocked.

This is configured using the **Configure Other** page.

```
┌─ Permitted WAN IPV4 Address ─┐
│                              │
│  100.110.120.130             │
│                              │
│  0.0.0.0: Permit all WAN addresses │
│                              │
└──────────────────────────────┘
```

A request looks like:
```
http://<device.ip.address>/
http://<device.ip.address>/cm?cmnd=xxxxx
etc.
```

Examples

Permitted WAN IP4 Address	Requests from …	Result
0.0.0.0	Anywhere	Accepted
100.110.120.130	50.60.70.80	Rejected
	100.110.120.1	Rejected
	100.110.120.130	Accepted
	Local LAN	Accepted

WiFi Signal Indicator

WiFi Signal Indicator

Much like a smart phone, **Tasmota-Plus** shows the received WiFi signal strength in the top-right corner of the Main page.
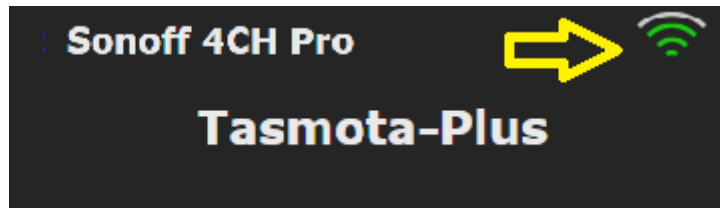
Clock Configuration Page

Standard Tasmota has no configuration page to set the parameters necessary to correctly calculate the local time, and local sunrise/sunset times.

Tasmota-Plus has a **Configure Clock** page as shown below.

Local Date & Time (refresh page to update)

2020-10-09 13:59:57
Sunrise: 06:41
Sunset: 19:30

Configure Clock

For Sunset/Sunrise calculations

Latitude (degrees, North+/South-)

-37.813600

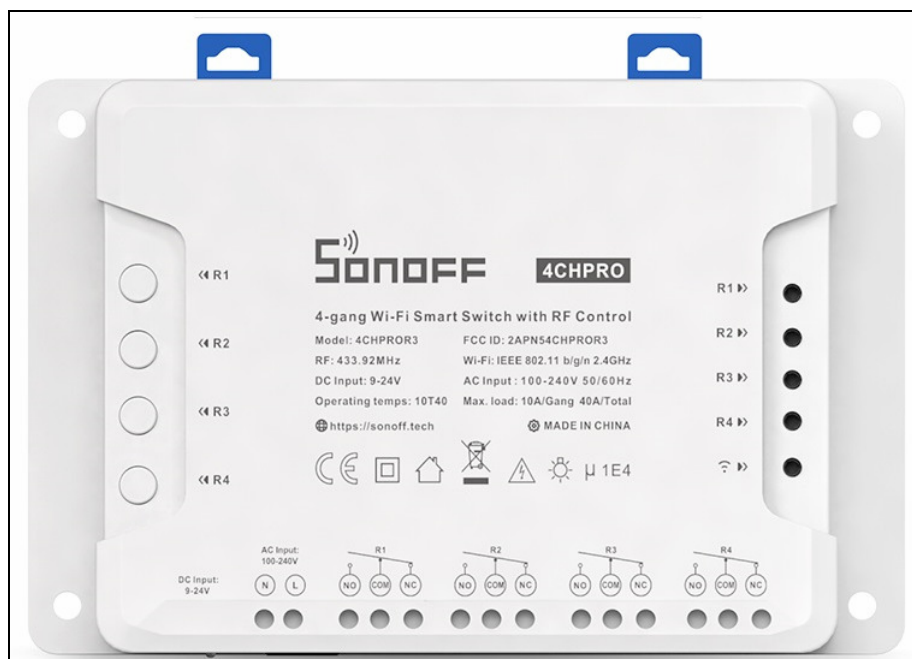**Longitude (degrees, East+/West-)**

144.963100

Use Daylight Savings? ☑

Timezone offset from GMT

Standard Time

+10:00

Daylight Savings Time

+11:00

Daylight Savings

Starts		Ends	
First ⌄		First ⌄	
Sun ⌄		Sun ⌄	
of		of	
Apr ⌄		Oct ⌄	
at		at	
2		3	
o'clock		o'clock	

Hardware

Buttons R1 ~ R4	Manual control of Relays 1~4 Short press toggles the associated relay ON ⬅➡ OFF
LEDs R1~R4	ON if the associated relay is ON.
LED 📶	OFF: All Relays OFF ON: One or more Relays ON Blinking: Device is in Initial Setup Mode[3].
Relays	Screw Terminal connections. Single Pole Double Throw (SPDT) NO: Normally Open. (Closed when Relay is ON) COM: Common connection NC: Normally Closed (Closed when Relay if OFF)
DC Input	9 to 24 VDC. DC Socket: 2.1mm, Centre positive.
AC Input	100 to 240 VAC (Screw terminals)
Power consumption	All Relays OFF: 0.2 W All Relays ON: 3.0 W
Mounting	DIN rail, or 4 x Screw points (screws not included)

---

[3] See page 22

Wiring Examples

——	Up
——	Down
——	Neutral
——	Live

AC Motor

DC Motor

Motor wires
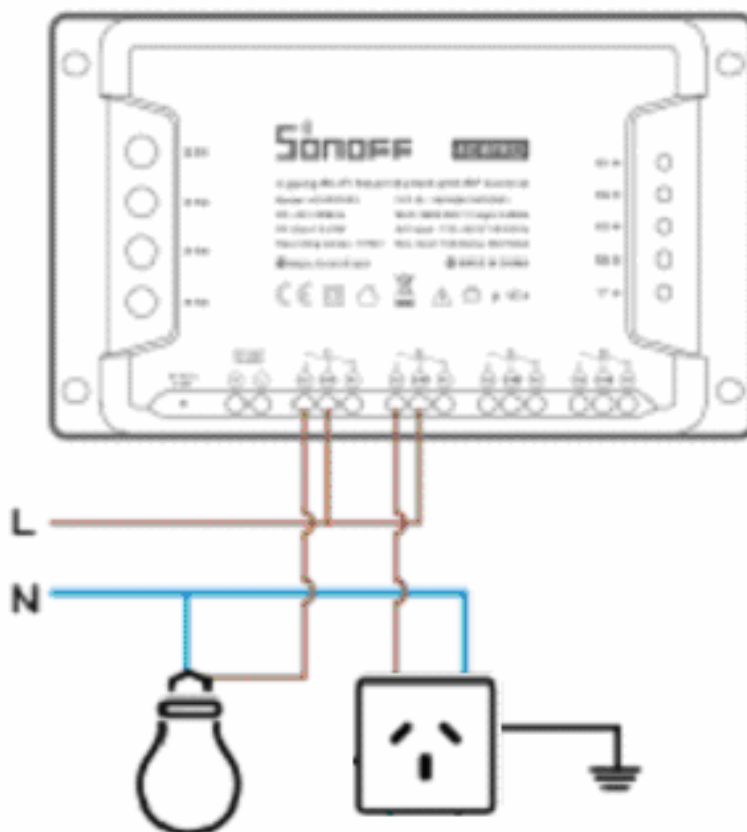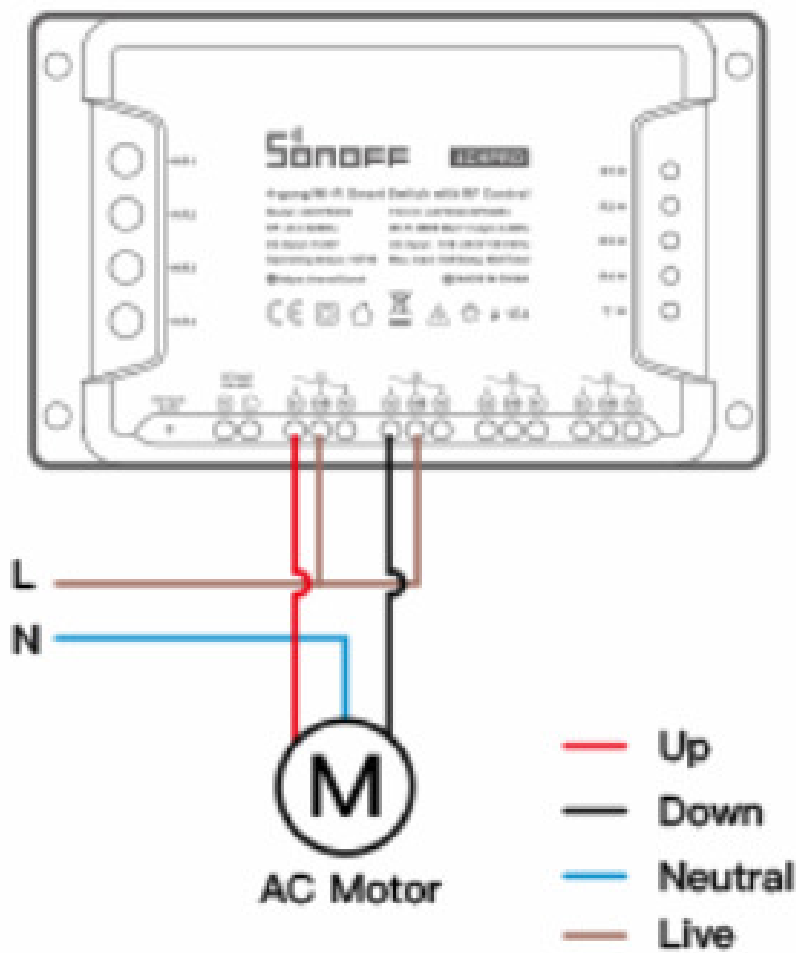
— —

— +
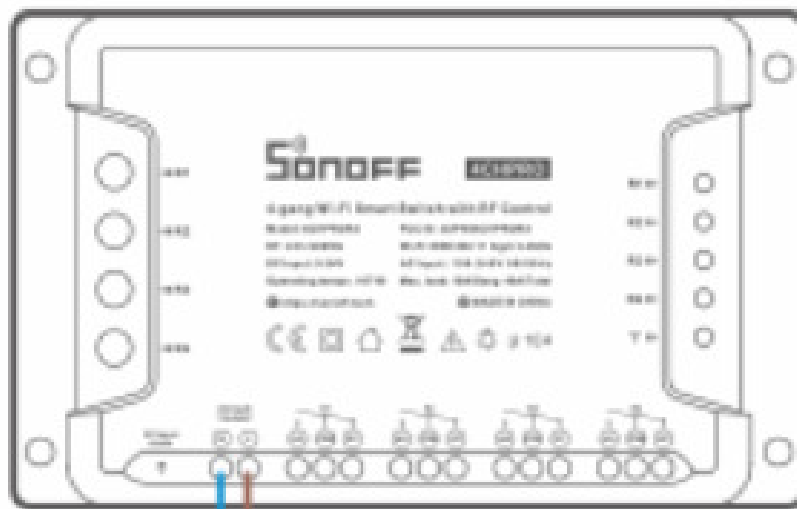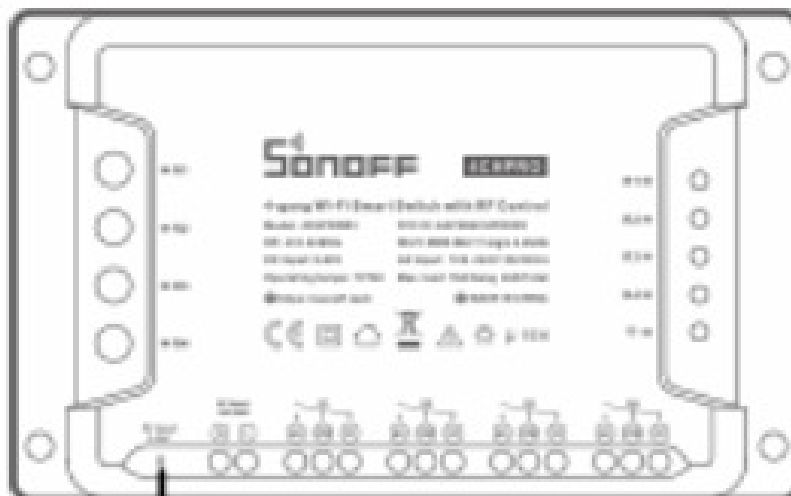
Requirements

The SS-4CHPro requires:

- **Initial Setup**
  - A device with a Web Browser & WiFi interface, located close to the SS-4CHPro. A smart-phone, or tablet will usually be sufficient.
- **Operation**
  - A WiFi Access Point (AP) connected to the local LAN[4], within the WiFi Range[5] of the SS-4CHPro.
  - A DHCP[6] server on the LAN.
- **Ongoing Management**
  - Any device with a Web browser and connected to the same LAN as the SS-4CHPro.

---

[4] Local Area Network. See https://en.wikipedia.org/wiki/Local_area_network

[5] See Specifications, page 23

[6] Dynamic Host Configuration Protocol: See https://en.wikipedia.org/wiki/Dynamic_Host_Configuration_Protocol
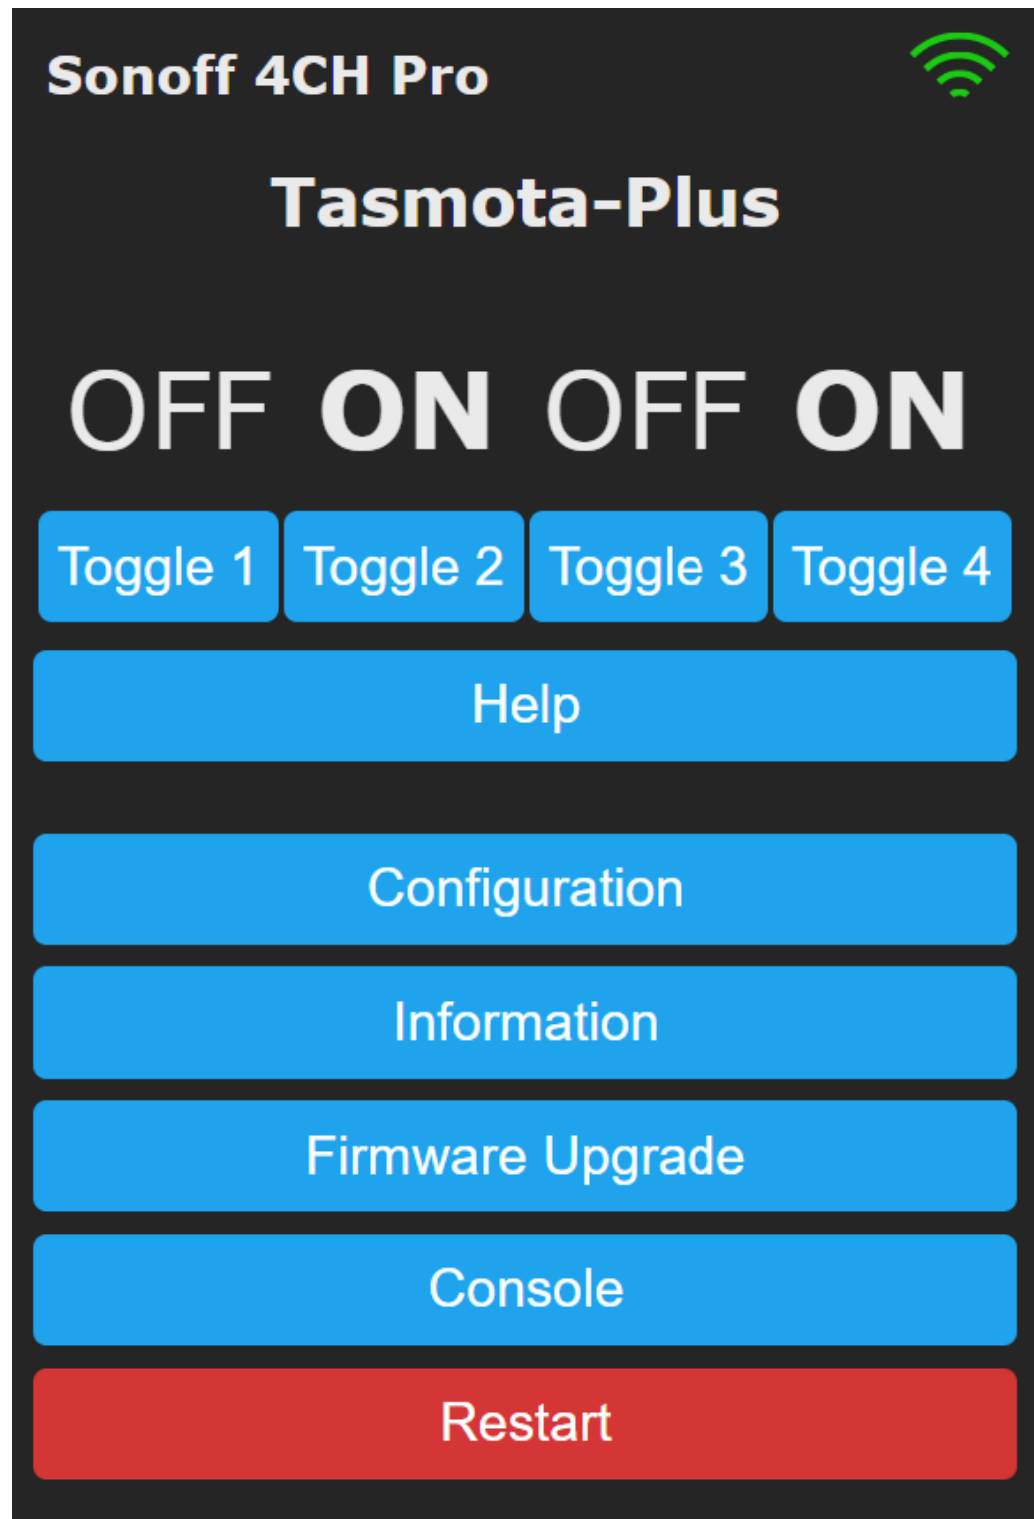
Web Browser Interface

Figure 4 - The Tasmota Web Interface is available from any Web browser

Simply use any web browser to open the web page
`http://<device.ip.address>/`

See documentation here: `https://tasmota.github.io/docs/WebUI/`

http:// Command Interface

Simple commands as below will (e.g.) turn the relays ON.

Note: %20 in a URL = Space character

From Web Browser
```
http://<device.ip.address>/cm?cmnd=power1%20on
```

From Windows or Linux command/terminal window
```
curl http://<device.ip.address>/cm?cmnd=power1%20on
```

From a Windows Batch file (*.bat file)
```
curl http://<device.ip.address>/cm?cmnd=power1%%20on
```
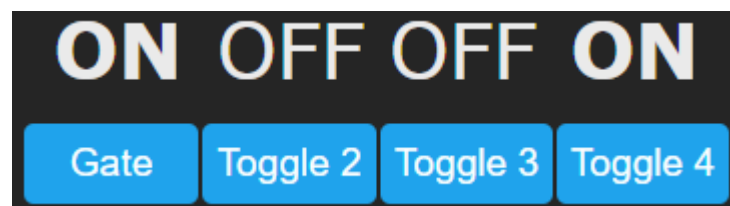
Note: need double % characters if in a batch file

From a PHP script (*.php file)
```
file_get_contents(
 'http://<device.ip.address>/cm?cmnd=power1%20on');
```
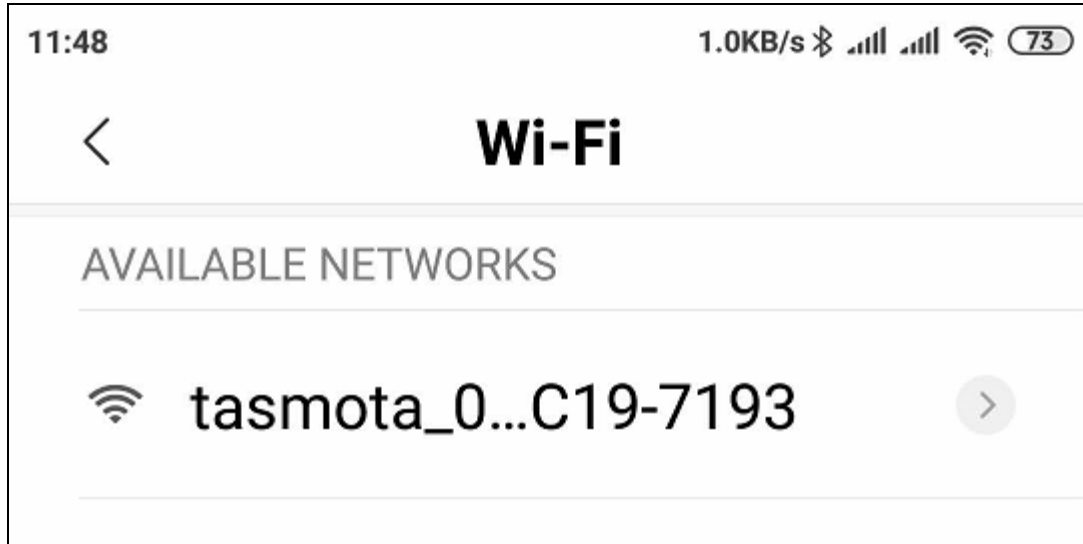
This command will change the Text for the 1st relay button.

```
http://<device.ip.address>/cm?cmnd=webbutton1%20Gate
```

Getting Started

1. Apply DC or AC power to the SS-4CHPro.

2. When in Factory Default state, the device powers up in **Initial Setup Mode**[7]. Search for a WiFi network named tasmota_xxxxxx-yyyy using your smartphone, tablet, …

> **NOTE**: If you do not see this WiFi network: Reset the device to Factory Default. See page 22.

3. Connect to that WiFi network. On connection to the network, you may get a warning that there is no Internet connection and be prompted to connect to a different network. Do not allow your mobile device to select a different network.

4. After you have connected to the Tasmota WiFi AP, open http://192.168.4.1 in a web browser on the smartphone (or whatever device you used). Depending on the phone, it will take you to the Tasmota configuration page automatically, or you will get a prompt to sign in to WiFi network or authorise. Tapping on the AP name should also open the configuration page (shown below).

---

[7] See page 22.

Figure 5 - A device in Factory Default mode displays this page.

On this page you can either:

- **Scan** for available WiFi networks. Select the right network from the list; or
- **Manually Enter** the **Network 1 Name (SSID)** - your WiFi network name (case sensitive)

Network 1 Password - password for your WiFi network (Required)
The password has to be under 32 characters and without special characters
(e.g. asterisks) or white spaces

Recommended:
Network 2 Name (SSID) - alternative WiFi network SSID, in case
connection to Network 1 fails.
Network 2 Password - password for your alternative WiFi network

Click the **Show password** checkbox(s) to see the password(s) you enter to
ensure that it is correct and that your mobile device has not inadvertently
capitalised the first letter nor autocorrected from what you entered.
~~**Double**~~ **Triple** check the WiFi credentials.

Click

> Save

The Tasmota-Plus device will restart and connect to your WiFi network.
The tasmota_xxxxx WiFi network will not longer exist, so your smartphone will
automatically connect back to its normal WiFi network.

5. The next step is to learn the IP address assigned by your local DHCP
    server to your Tasmota device. There are a number of ways to do this.
    You will look for a device with a name similar to this.
      i.e. **tasmota-_xxxxxx-yyyy**

    • **Your router** – Look in DHCP leases.
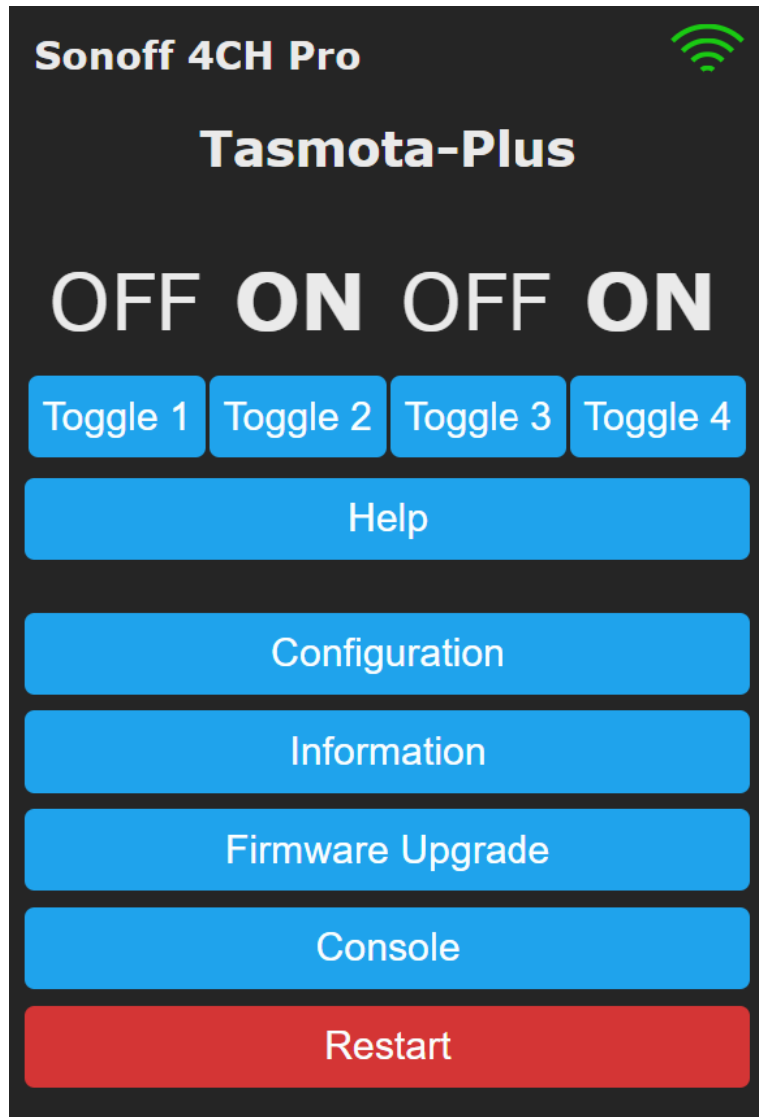
    • **Fing** – for Android or iOS
      `https://www.fing.com/products/`
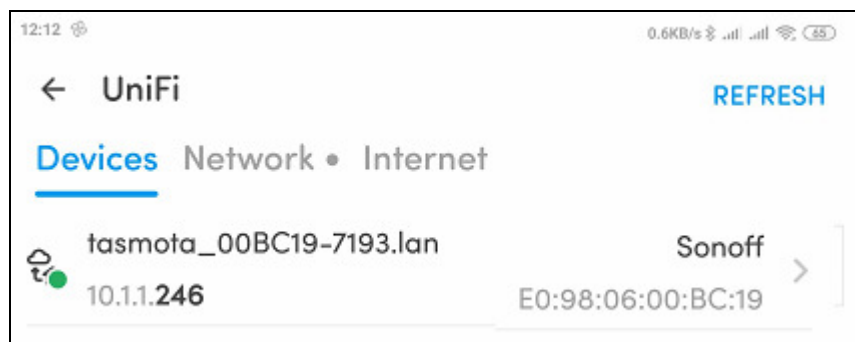
    • **Angry IP Scanner** – open source for Linux, Windows and Mac.
      `https://angryip.org/`

    • **SuperScan** – Windows only (free)
      `https://sectools.org/tool/superscan/`

6. Using your web browser, visit the device's IP address, as discovered in the step above.

NOTE: Do NOT visit https:// (no 's')

```
http://<device.ip.address>/
```


Using the Web Interface

Standard Tasmota Web Interface
This is documented here:
```
https://tasmota.github.io/docs/WebUI/
```
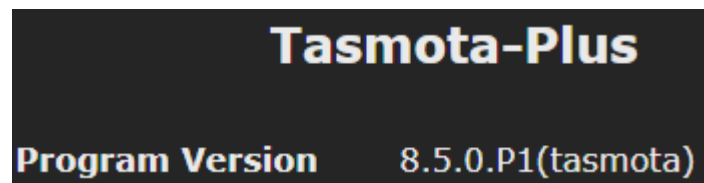
Tasmota-Plus Features
See **Tasmota-Plus Smart Devices** page 5 in this document.

Firmware

From time to time, new Tasmota-Plus firmware may be released for your device.

Checking the installed version

Open the Information page and note the **Program Version** currently installed.

Checking the latest released version

Use your web browser to visit:

http://ubwh.com.au/tasmota/Tasmota-Plus/SS-4CHPro-ReleaseNotes.php

Updating

If you choose to update the firmware to the latest version, there are two methods.

Over The Air (OTA) This is the simplest. Open the Firmware Upgrade page. Enter this OTA Url: http://ubwh.com.au/tasmota-Plus/tasmota-SS-4CHPro.bin.gz Click **Start upgrade**	
File Upload With a web browser on your local PC, visit http://ubwh.com.au/tasmota/Tasmota-Plus/tasmota-SS-4CHPro.bin.gz Save the file on your local computer. Open the Firmware Upgrade page. Choose the file just downloaded. Click **Start upgrade**	

Initial Setup Mode

When in this mode, the device can not connect to a WiFi network as is does not know which network to connect to.

The device WiFi is in Access Point (AP) mode, broadcasting with a WiFi Network name of *tasmota_xxxxxx-yyyy*

The device is in Initial Setup Mode when it is in **Factory Default** state.

Factory Reset Procedure

When the settings have been cleared, the device is in *Initial Setup Mode* and can not connect to a WiFi network.

There are a number of ways to into clear (reset) all settings and get the device into *Initial Setup Mode*.

1. Web Browser Interface ➔ Configuration

   Reset Configuration

2. Power off the device.
   Repeat 6 times: Power on for 1 second, then power off.
   Power on the device.

Specifications

Power supply	9 to 24 VDC, or 100 to 240 VAC Power supply not included.
Relays	4 ea Single Pole Double Throw (SPDT)
Max. Current per Relay	10 A
Max. VA per relay	2400 VA
Max. Power load per relay	2400 W (real)
Power consumption	All relays OFF: 0.2 W All relays ON: 3.0 W
WiFi Standards	802.11b/g/n (2.4 GHz)
WiFi Range	No walls: 20 m With walls: Less than 20 m
Manufacturer's warranty	1 year
Hardware manufacturer	Sonoff
Manufacturer's model	4CHPROR3
Firmware	Tasmota-Plus (customised)
Works with http://	Yes
Works with Amazon Alexa	No
Works with Google Assistant	No