

Z1 SUGARLAND BESS – COMBINED EMS + MBMU ENCLOSURE – 375kW / 1221kWh – ERCOT – DWG Z1SL–A3–000 REV K

480V Power Distribution




File: power_480v.kicad_sch

Control Power 120–240V + 24VDC




File: control_power.kicad_sch

Aux Power 220–380Y to CATL



File: aux_power.kicad_sch

EMS Computers + Networking



File: ems_network.kicad_sch

MBMU + CAN Bus



File: mbmu_can.kicad_sch

Fire Alarm – Potter ARC–100



File: fire_alarm.kicad_sch

FSS Releasing – Option B



File: fss_releasing.kicad_sch

Metering + CTs (Single eGauge)



File: metering.kicad_sch

A LABEL–STUB SET / B FIRST FULLY–WIRED / C EXTERNAL PAD TX + SINGLE SWITCH / D CATL AUX + SUPPRESSION DATA /
E MBMU–ETH PINOUT RECOVERED / F AS–BUILT PINOUT COORDINATE–VERIFIED / G (ONE–PAGE EDITION) /
H PIN–LEVEL VERIFICATION VS 9 OFFICIAL CATL/KEHUA DOCS / I KEHUA CABINET–375 INTEGRATED AUX – EXTERNAL PAD TX DELETED /
J 15–AGENT REVIEW: 8 CONFIRMED FIXES (TERMINAL TYPES, PSU3, CB3/5/7 20A, Q2, SHIELD BONDS) /
K REVIEW–BOARD REMEDIATION: HARDWIRED PCS FIRE TRIP (K1/X23), DEDICATED FIRE BRANCH CB9, FSS OPTION B RELEASING
CHAIN (PSN1/DS1/MM1–3, SHEET 9), CLASS A SLC RACK–TO–RACK, 24V RESTRUCTURE (PSU4/RM2 + HEALTH), ENCLOSURE HVAC CIRCUITS.

DESIGN BASIS: Sugarland Scope of Work + Z1 Carson reference drawings. ERCOT deletions: Siemens relay, CSIP, fiber/SFP.
All in–sheet connections drawn as wires; junction dots mark every tee. Global labels only where a net crosses sheets.

DEVIATIONS REQUIRING CLIENT APPROVAL: single eGauge EG4115 (9 of 15 CTs); single managed switch (VLAN–segregated).

OPEN ITEMS AT IFC: (1) PE STAMP. (2) SCCR UL508A SB4 WORKSHEET. (3) RFI–001 KEHUA (EPO SENSE, AUX BREAKERS, N–G BOND).
(4) RFI–002 CATL/POTTER (JX1 AEROSOL PINS, CHILLER MCA/MOCP, 24V LOADS). (5) NFPA 72 WORKSHEET NFPA72–W1 SIGN–OFF.
(6) BATTALION VLAN CONFIG. (7) WIRE NUMBERS AT FAB RELEASE. SEE SCHEDULE PACKAGE Z1SL–SCH–001 FOR FUSE/BREAKER,
LABEL, TERMINAL, CABLE, 24V–LOAD, T2–CENSUS, HEAT–BALANCE AND SCCR SHEETS.


DRAWN: CLAUDE (AI) / CHECKED: _____ / APPROVED (PE): _____ PROPRIETARY – STR MEDICAL. PE REVIEW REQUIRED.

WIRE COLOR LEGEND (FAB SHOP)

- 480V POWER (L1/L2/L3, SPD, TAPS)
- 220/380Y AUX POWER TO CATL
- 120/240V CONTROL POWER
- 24VDC (+)
- 24VDC COMMON
- NEUTRALS
- PROTECTIVE EARTH
- ETHERNET (LOGICAL)
- CAN BUS
- FIRE ALARM (SLC/NAC/BATT)
- METERING (CT/PT)
- FSS LOOP 24V (CATL AEROSOL RELEASE, AWG16)
- CONNECTOR CRIMP JUMPERS (AWG20, IN–PLUG)


PROPRIETARY – STR MEDICAL. FOR REVIEW ONLY – NOT FOR CONSTRUCTION – PE REVIEW REQUIRED		
STR Medical		
Sheet: / File: Z1–Sugarland.kicad_sch		
Title: z1Power – Sugarland BESS – Z1 Sugarland BESS – Combined EMS+M		
Size: A3	Date: 2026–08–09	Rev: K
KiCad E.D.A. kicad–cli 7.0.11+dfsg–1build4		Id: 1/9

480V POWER DISTRIBUTION, MAIN DISCONNECT + SPD

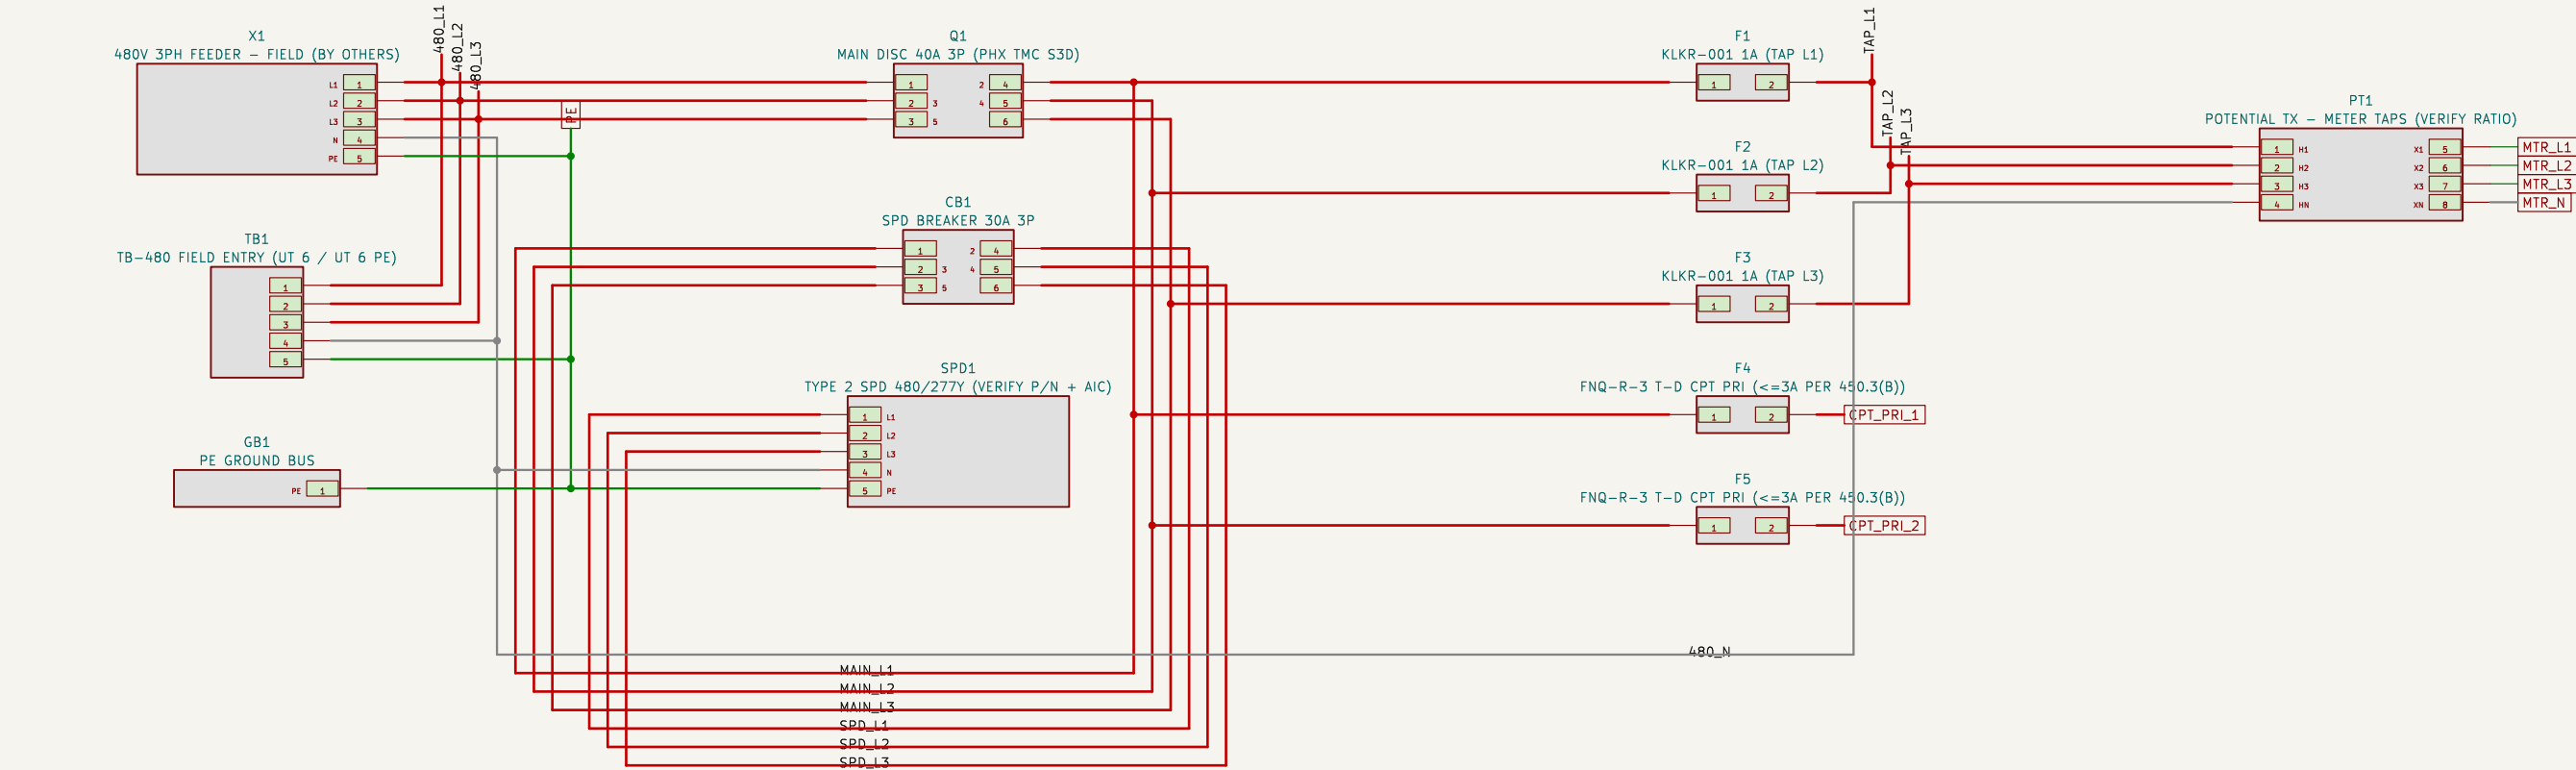


T2 CPT PRIMARY PROTECTION: F4/F5 <=3A TIME-DELAY PER NEC 450.3(B) PRIMARY-ONLY (500VA, PRI FLA 1.04A). SEE FUSE SCHEDULE Z1SL-SCH-001.
SPD IS GOOD PRACTICE FOR OUTDOOR ERCOT SITE. NOT DWELLING SERVICE EQUIPMENT - NEC 230.67 DOES NOT APPLY.
SCCR: PANEL SCCR TBD - OBTAIN AVAILABLE FAULT CURRENT FROM EOR. UL508A MARKING REQUIRED.
LABELS PER LABEL SCHEDULE Z1SL-SCH-001: 409.110 NAMEPLATE, 409.22(B) SCCR MARKING, 110.16 ARC FLASH, 480V ORANGE WARNINGS.

CONTROL POWER: CPT, 120V CONTROL MAIN, 24VDC REDUNDANT BUS + DC UPS

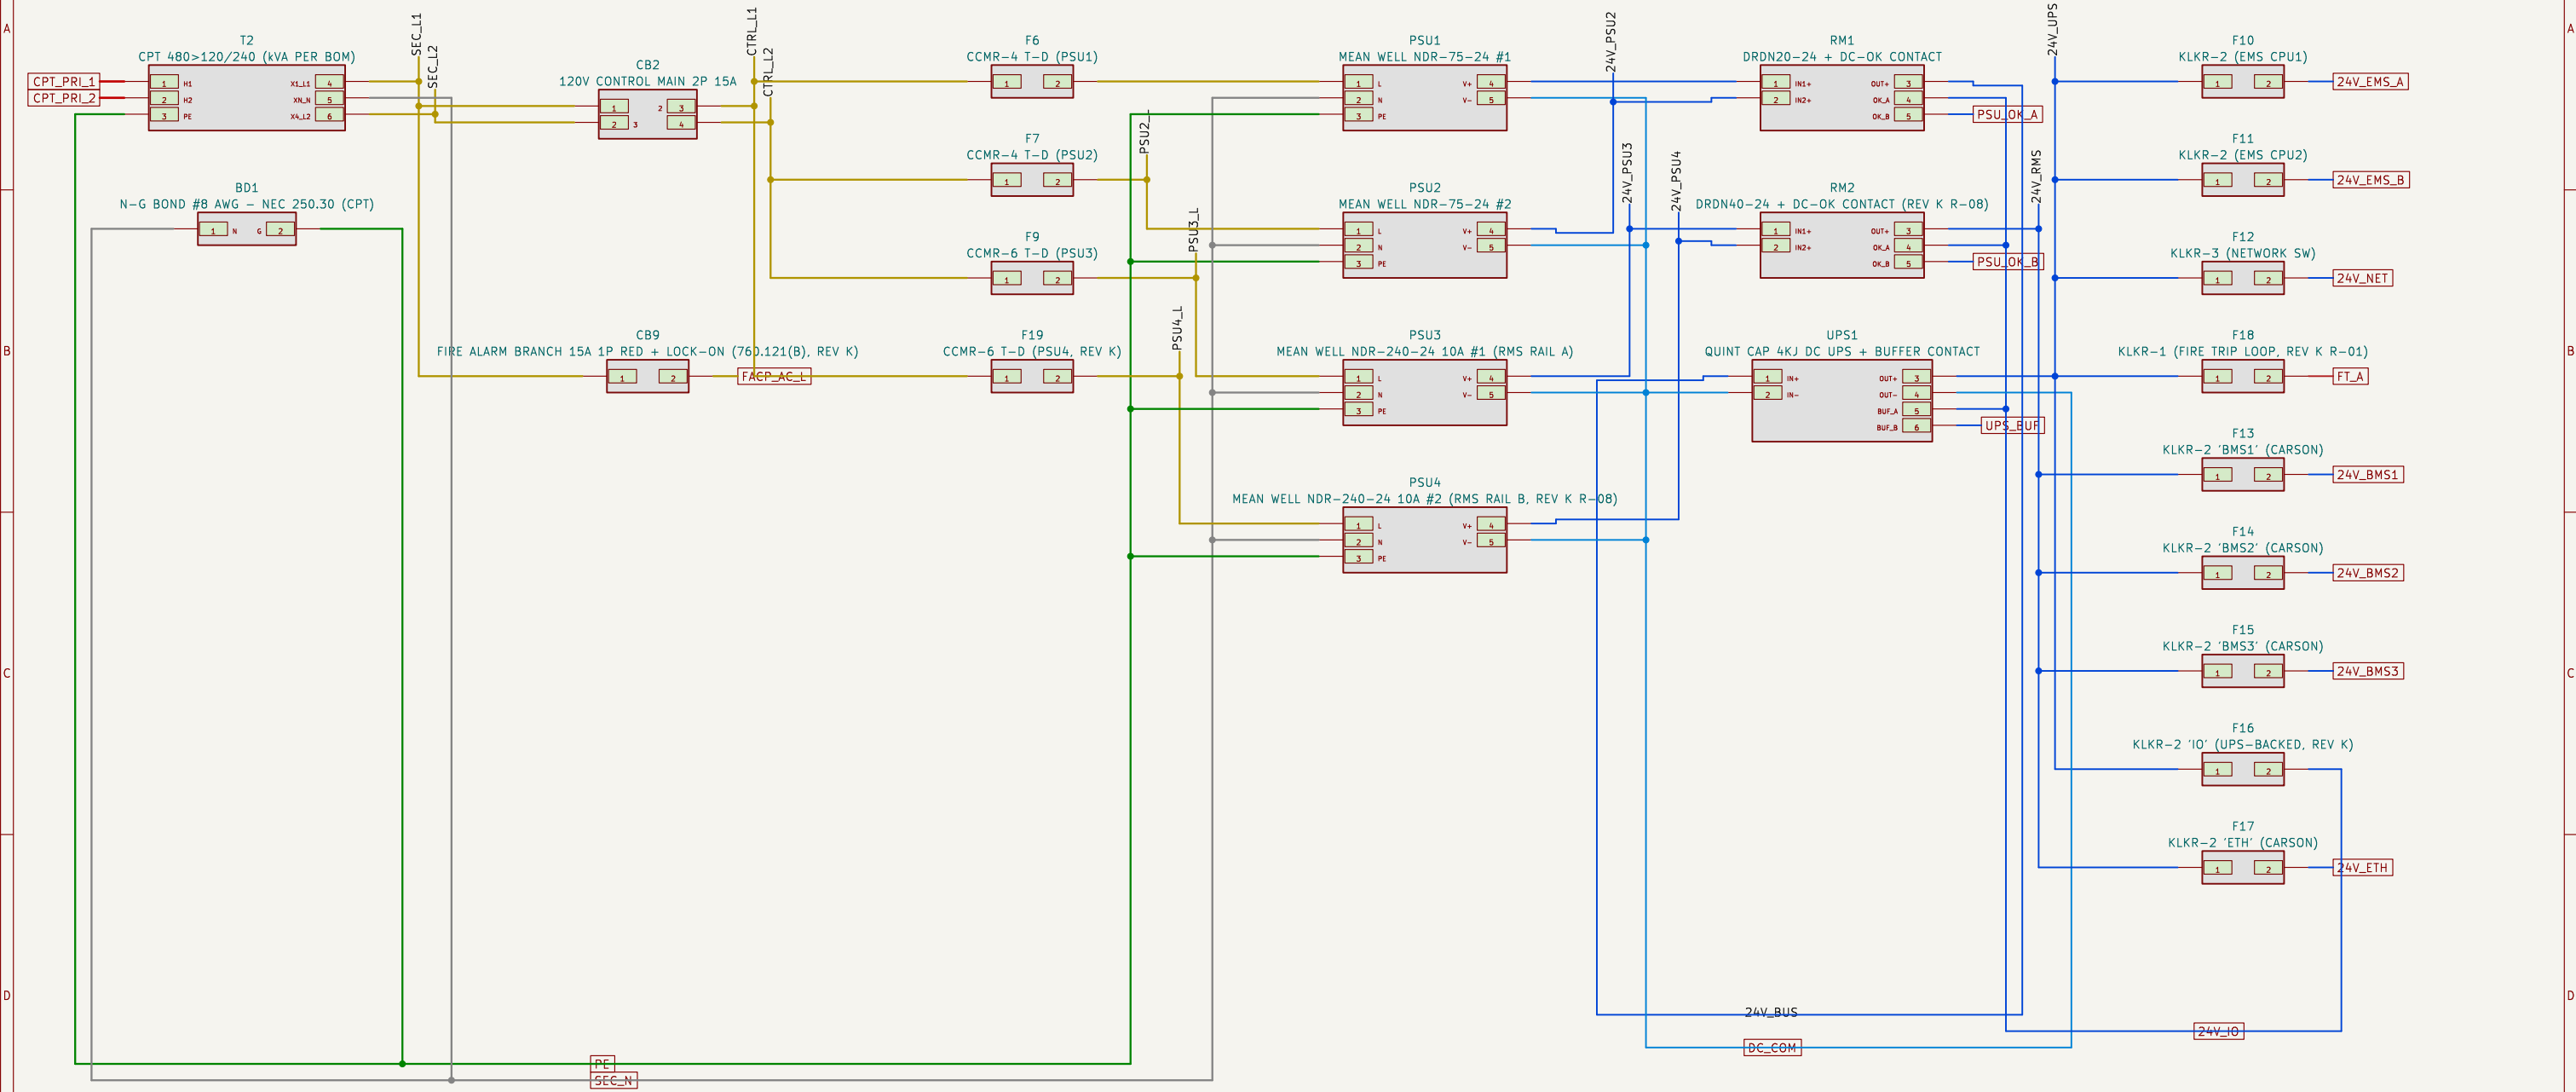

REV K 24VDC (R-08/R-09): RAIL A = PSU1+PSU2 > RM1 > UPS1 (EMS/NET/IO/FIRE-TRIP). RAIL B = PSU3+PSU4 > RM2 (MBMU+ETH).
SUPPLY HEALTH: RM1/RM2 DC-OK + UPS1 BUFFER CONTACTS TO IO1 DI3/DI4/DI5 (SHEET 5) - FIRST FAILURE ANNUNCIATES.
FIRE BRANCH: CB9 FEEDS FACP1 + PSN1 ONLY (NEC 760.121(B)) - RED HANDLE, LOCK-ON, PLACARD, OPENING Q1 PUTS FACP ON BATTERY.
UPS-BACKED: EMS + NETWORK + IO1 + K1 TRIP LOOP. VERIFY DC LOAD CENSUS (SCHEDULE Z1SL-SCH-001) VS HOLD-UP AT COMMISSIONING.
DC_COM GROUNDING PER BATTALION ENERGY EMS REQUIREMENT ONLY - CONFIRM BEFORE BONDING.
FUSE RATINGS + CLASSES PER FUSE SCHEDULE Z1SL-SCH-001 (TIME-DELAY CCMR ON PSU PRIMARIES). LEG BALANCE: L1=PSU1+PSU4, L2=PSU2+PSU3.
DC FUSES F13-F17 MATCH CARSON A5-BUILT FUSE HOLDER LABELS: 1:BMS1 2:BMS2 3:BMS3 4:IO 5:ETH (PER-DEVICE FUSING).

AUX POWER: FROM KEHUA PCS CABINET–375 INTERNAL 30KVA AUX TX (REV I) + PER–CABINET HVAC/BMS DISTRIBUTION

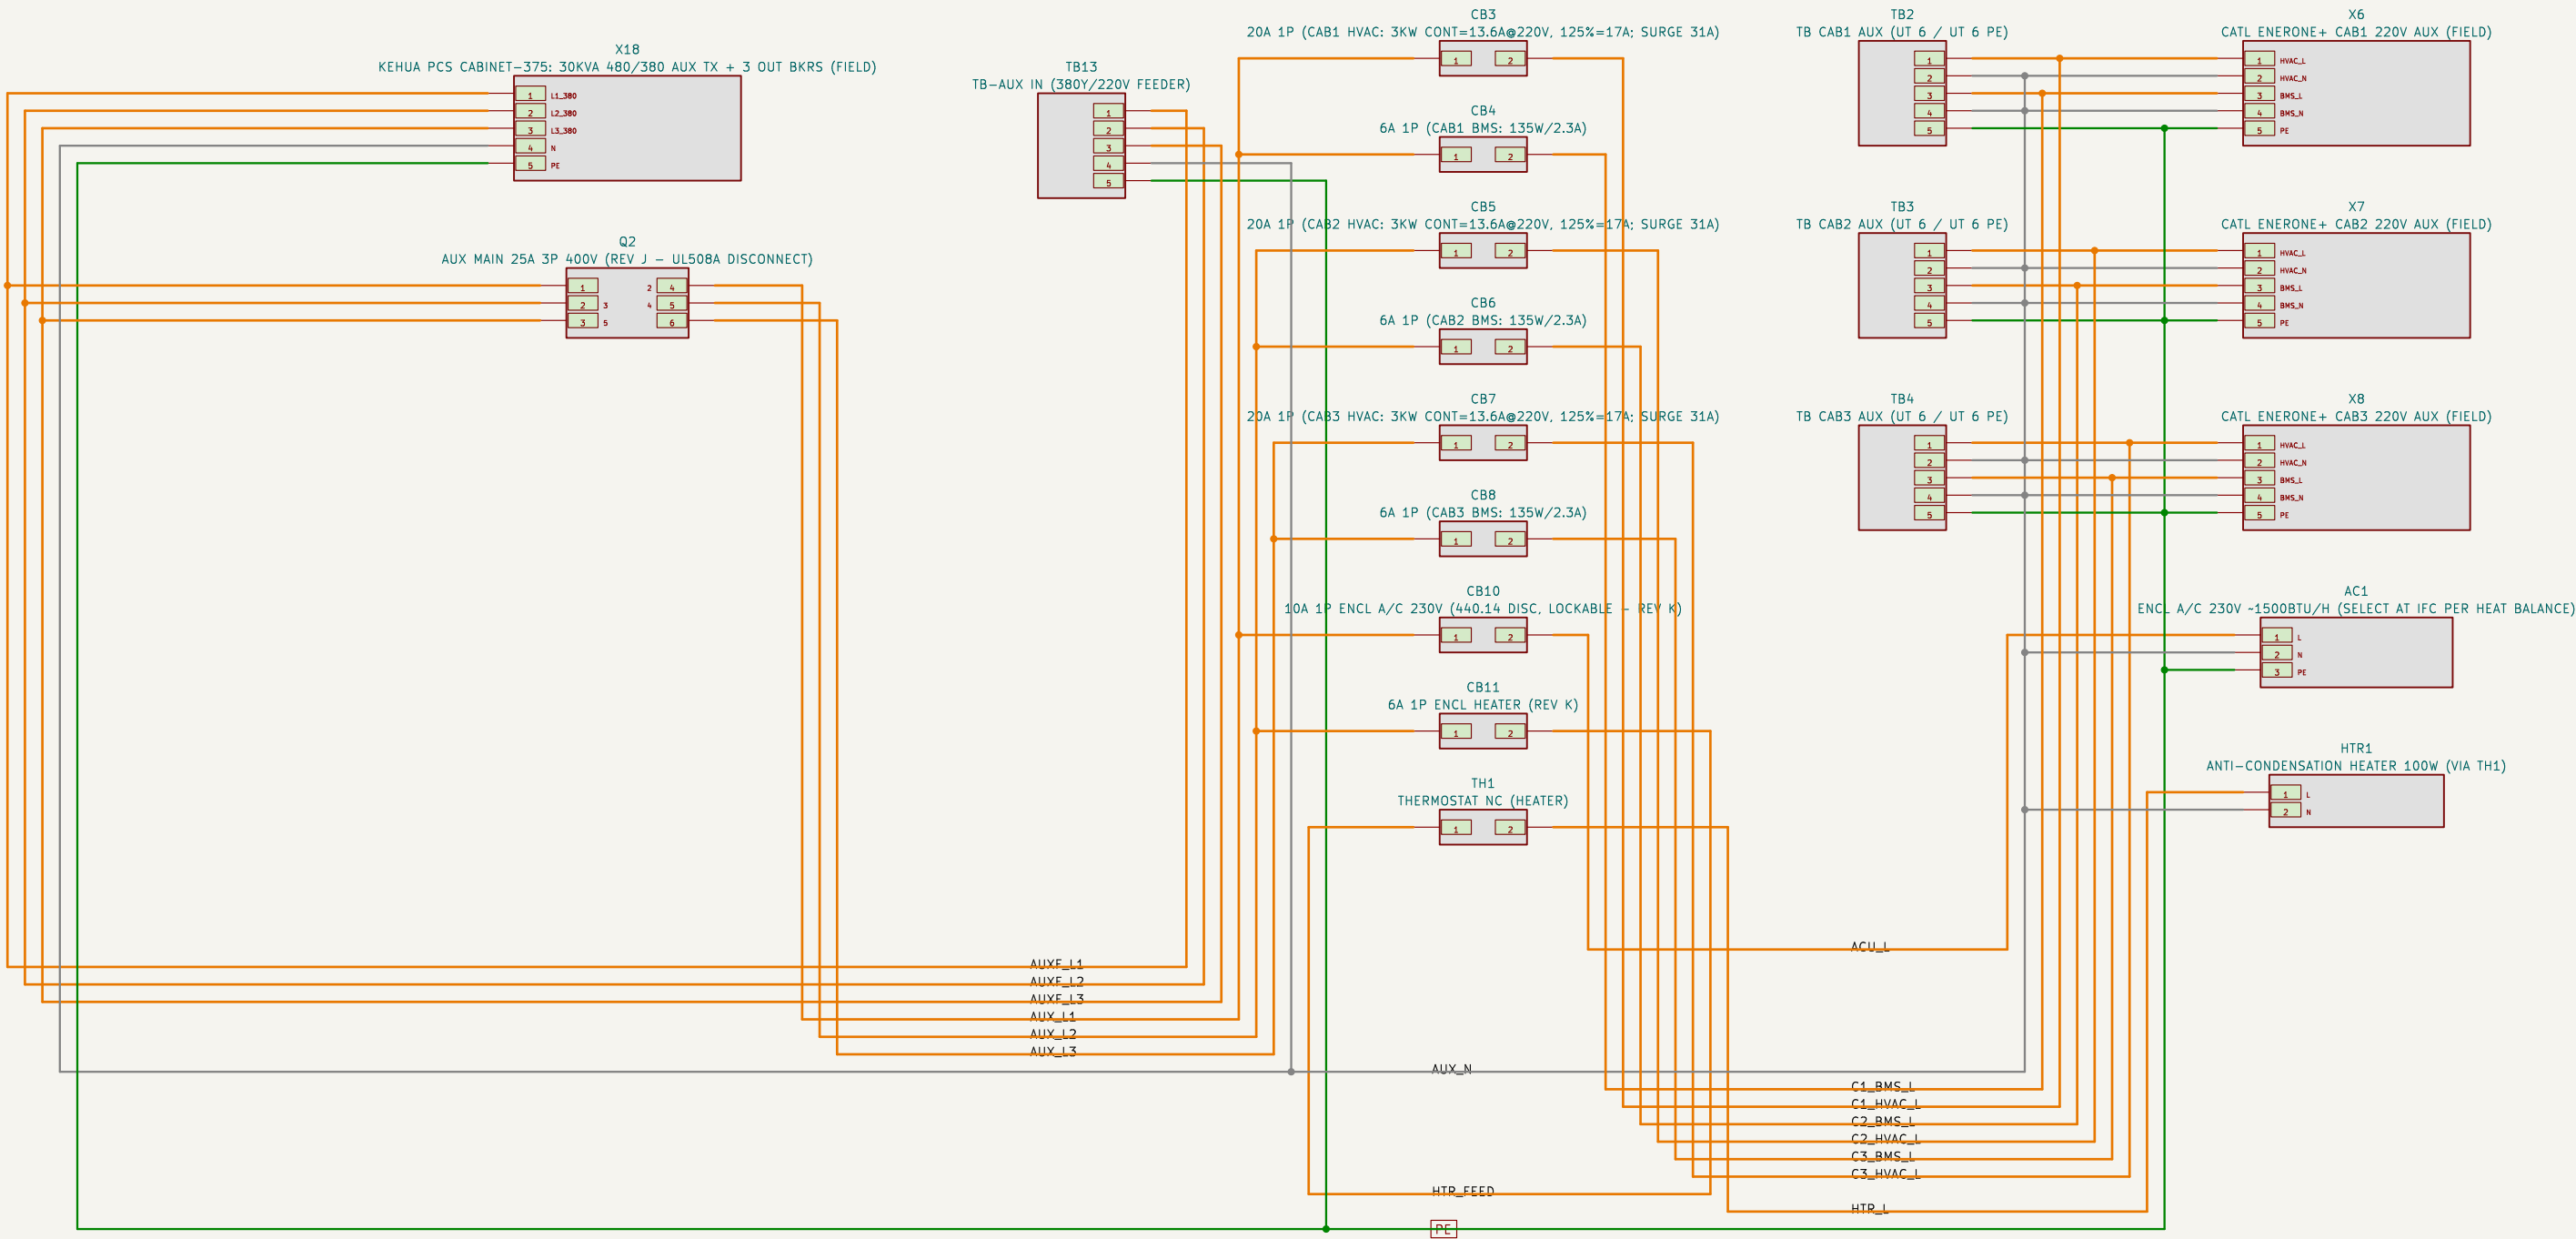

REV I (CLIENT CONFIRMED): AUX SOURCE = KEHUA PCS CABINET–375 INTERNAL 30KVA 480/380V TX + 3 OUTPUT BREAKERS (KEHUA SCOPE).
REV I: EXTERNAL PAD TX DELETED; AUX LOAD 3x(3KW+150W) + A/C + HEATER ~10KW << 30KVA (CENSUS IN Z1SL–SCH–001). N–G BOND + SDS
KEHUA TX PER NEC 250.30 – INSIDE PCS CABINET, VERIFY WITH KEHUA + PE; ONE BOND ONLY, NO PANEL–SIDE BOND.
AUX FEEDER: NEC 240.21(B)(2) 25–FT TAP – AMPACITY >= 1/3 OF THE KEHUA OUTPUT BREAKER, TERMINATES IN Q2 (SINGLE OCPD);
ANY KEHUA BREAKER > 30A REQUIRES UPSIZE FROM AWG10 (RFI–001). CB3–CB11: UL489, 480Y/277V–RATED, MARKED IR – SEE Z1SL–SCH–001.
REV J: Q2 25A 3P AUX MAIN ADDED (UL508A INCOMING DISCONNECT). PANEL FED FROM TWO SOURCES (480V Q1 + 380Y KEHUA) – APPLY
'WARNING – TWO SOURCES OF SUPPLY' LABEL PER NEC 409.110. CB3/5/7 NOW 20A C–CURVE (3KW CONT = 13.6A, 125% = 17A); HVAC BRANCH AWG10.
PHASE BALANCE: CAB1=L1, CAB2=L2, CAB3=L3. 220V L–N. LOADS PER CATL ENERONE+ SPEC (PUBLIC REV): HVAC 3KW
CONT / 10A RATED. INRUSH: SPEC R08306P05L31 <=12.5A <1MS, BUT CATL EW DIAGRAM V1.2 CITES SURGE 31A (PUBLIC SHEET 32A) –
DESIGN FOR 31A WORST CASE; 20A C–CURVE (REV J) HOLDS EITHER FIGURE. NEC 440.22(A) CEILING = 175% X RLA – VALID FOR RLA >= 11.5A;
CHILLER NAMEPLATE RLA/MCA/MOCP AT RFI–002 GOVERNS FINAL VALUE (ART. 440, NOT 210/430). BMS 150W / SURGE 4A PER EW (SPEC 135W/<=6A).
FIELD AUX
TO CABINETS: CATL AWG10 JONHON ADAPTER CABLES AT JXH1 (PLUG 360242–00760): A/B=CHILLER, C/D=BMS, ~230VAC.

Diagram illustrating the EMS Computers, Network Switches, IOLOGIK + FIELD COMMS system architecture.

Components:

- CPU1:** MOXA UC-2222A EMS #1 (BATTALION). Inputs: 24V_EMS_A (V+), 24V_EMS_B (V-). Outputs: WAN (3), LAN (4).
- CPU2:** MOXA UC-2222A EMS #2 (BATTALION). Inputs: 24V_EMS_A (V+), 24V_EMS_B (V-). Outputs: WAN (3), LAN (4).
- IO1:** MOXA IOLOGIK E1214 (FACP MON + SUPPLY HEALTH - REV K). Inputs: 24V_IO (V+), FACP_ALM (DIO-2), FACP_SUP (DIO-2), FACP_TRB (DIO-2), FACP_COM (DI.COM), PSU_OK_A (DI3), PSU_OK_B (DI4), UPS_BUF (DI5). Outputs: ETH (10), DIO (11), DIO (12).
- SW1:** MOXA EDS-4014 MANAGED - VLANS: WAN / LAN / BMS (CONFIG PER BATTALION). Inputs: 24V_NET (V+), 24V_NET (V-). Outputs: P1-P14 (Ethernet ports).
- Field Comms:** X2 (SITE INTERNET / WAN (FIELD)), X3 (KEHUA 125KW PCS 1 - MODBUS TCP (FIELD)), X4 (KEHUA 125KW PCS 2 - MODBUS TCP (FIELD)), X5 (KEHUA 125KW PCS 3 - MODBUS TCP (FIELD)).

Connections:

- 24V_EMS_A and 24V_EMS_B connect to CPU1 and CPU2.
- 24V_IO connects to IO1.
- DC_COM connects to IO1.
- IO1 connects to SW1 (P1, P2, P3, P4, P5, P6, P7, P8, P9, P10, P11, P12, P13, P14).
- SW1 connects to CPU1 (LAN), CPU2 (LAN), and IO1 (ETH).
- SW1 connects to Field Comms (X2, X3, X4, X5).
- SW1 connects to Ethernet modules (ETH_METER, ETH_MOD1, ETH_MOD2, ETH_MOD3).
- SW1 connects to Ethernet ports (ETH_PC\$1, ETH_PC\$2, ETH_PC\$3).

Legend:

- ETH_CPU1_LAN
- ETH_CPU1_WAN
- ETH_CPU2_LAN
- ETH_CPU2_WAN
- ETH_IO

Notes:


- REV C: SINGLE MANAGED SWITCH REPLACES EDS-2005-EL + 2x EDS-2010-ML. WAN/LAN SEGREGATION NOW BY VLAN - VLAN 10 WAN (P1,P4,P5) / VLAN 20 LAN (P6-P12) / VLAN 30 BMS (P13-P15). CONFIG SHEET REQUIRED AT COMMISSIONING. VERIFY WITH BATTALION ENERGY THAT VLAN SEGREGATION MEETS THEIR EMS SECURITY ARCHITECTURE BEFORE ORDERING.
- IO1 DIO-2 = FACP ALM/SUP/TRB (PROGRAM RELAYS N/C - OPEN = EVENT. REV K R-01); DI3/4 = RM1/RM2 DC-OK; DI5 = UPS1 BUFFER.
- ETHERNET DRAWN AS LOGICAL LINKS. CAT 6A SHIELDED MINIMUM FOR ETH-MODULE-TO-EMS LINKS PER CATL SPEC.
- USE CAT 6A THROUGHOUT PANEL FOR ONE-SKU SIMPLICITY. PCS CONNECTIONS ARE COMMS ONLY. SWITCH IS A SINGLE FAILURE DOMAIN - SAME AS CARSON (EDS-2010 WAS ALREADY THE CONTROL SPOF); DUAL-SWITCH LACP IS THE UPGRADE PATH.

Metadata:

- PROPRIETARY - STR MEDICAL. FOR REVIEW ONLY - NOT FOR CONSTRUCTION - PE REVIEW REQUIRED
- STR Medical
- Sheet: /EMS Computers + Networking/
- File: ems_network.kicad_sch
- Title: z1Power - Sugarland BESS - EMS Computers + Networking
- Size: A3
- Date: 2026-08-09
- Rev: K
- KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4
- Id: 5/9


REV C: SINGLE MANAGED SWITCH REPLACES ED5-2005-EL + 2x ED5-2010-ML WAN/LAN SEGREGATION NOW BY VLAN - VLAN 10 WAN (P1,P4,P5) / VLAN 20 LAN (P6-P12) / VLAN 30 BMS (P13-P15). CONFIG SHEET REQUIRED AT COMMISSIONING. VERIFY WITH BATTALION ENERGY THAT VLAN SEGREGATION MEETS THEIR EMS SECURITY ARCHITECTURE BEFORE ORDERING. IO1 DIO-2 = FACP ALM/SUP/TRB (PROGRAM RELAYS N/C - OPEN = EVENT, REF K R-01); D13/4 = RMI/RM2 DC-OK; D15 = UPS1 BUFFER. ETHERNET DRAWN AS LOGICAL LINKS, CAT 6A SHIELDED MINIMUM FOR ETH-MODULE-TO-EMS LINKS PER CAT SPEC; USE CAT 6A THROUGHOUT PANEL FOR ONE-SKU SIMPLICITY. PCS CONNECTIONS ARE COMMS ONLY. SWITCH IS A SINGLE FAILURE DOMAIN - SAME AS CARSON (ED5-2010 WAS ALREADY THE CONTROL SPOF); DUAL-SWITCH LACP IS THE UPGRADE PATH.

CATL MBMU x3, ETH MODULES x3, CAN BUS + TERMINATION PROVISIONS

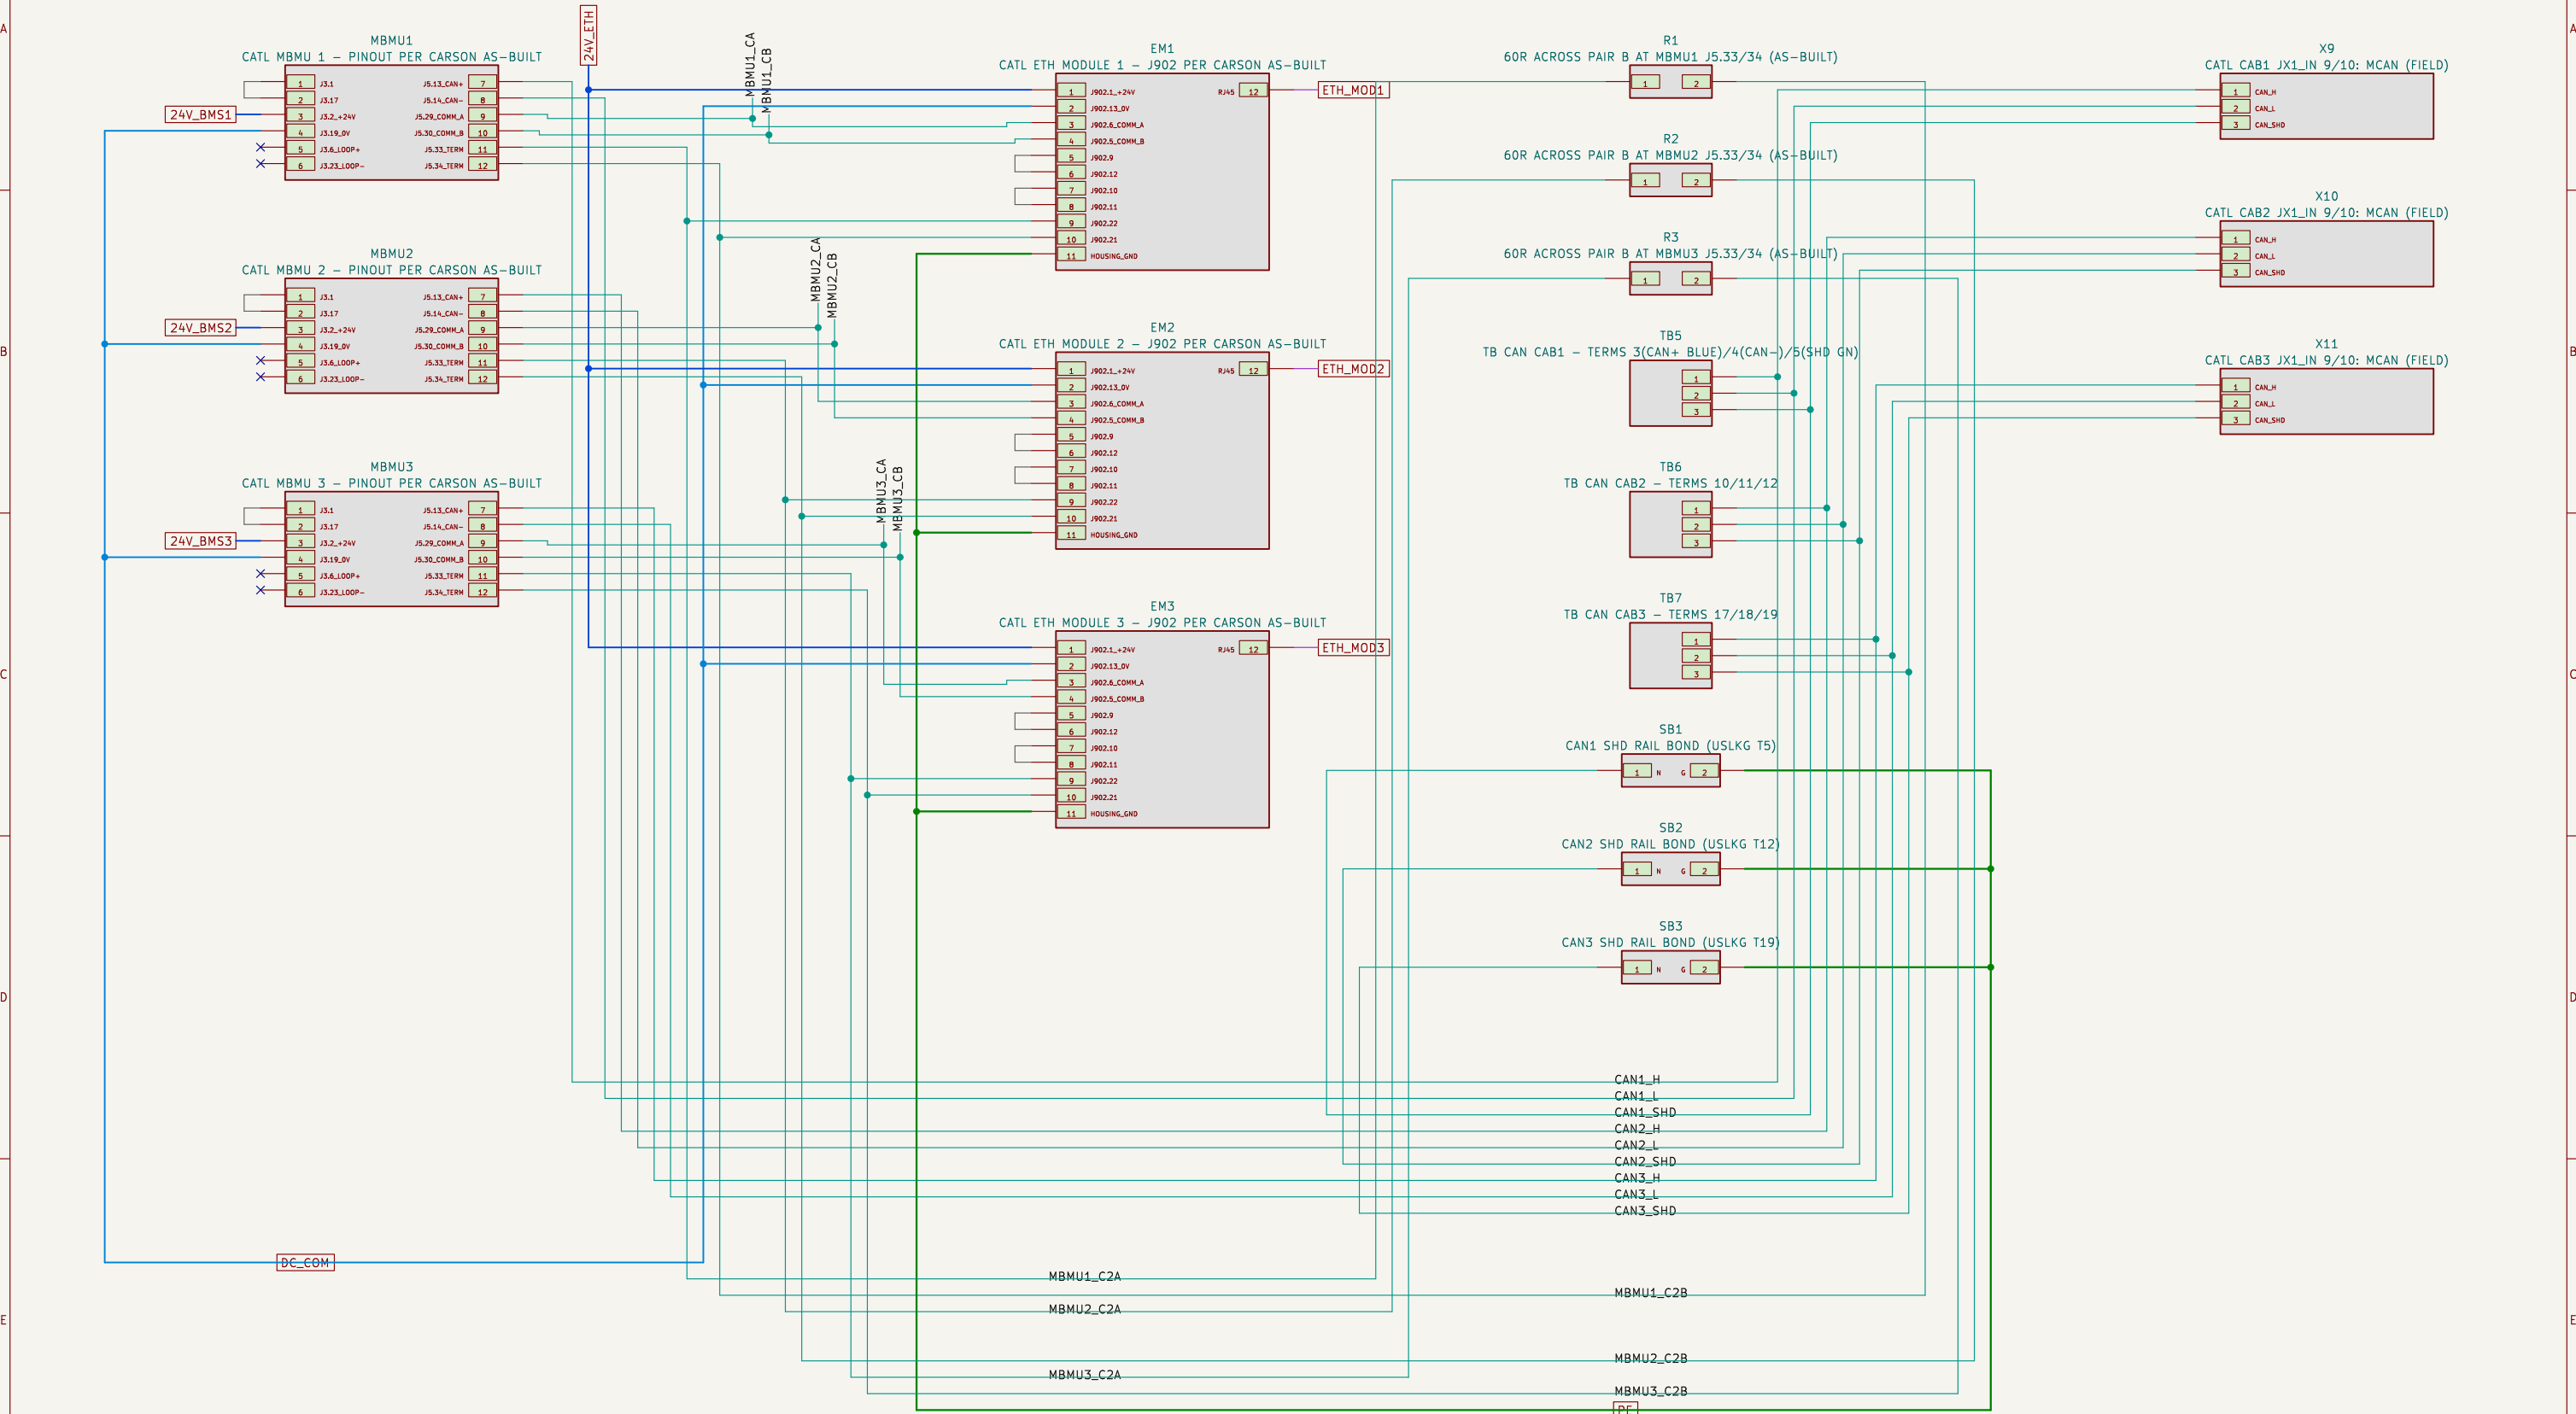


REV F: PINOUT RECOVERED + INDEPENDENTLY RE-VERIFIED (COORDINATE-LEVEL, ALL 3 CLUSTERS IDENTICAL). MBMU J3:
PIN 1 JUMPERED TO PIN 17 (CRIMPED LOOP). PIN 2 = +24V (FUSED PER CABINET). PIN 19 = 0V. MBMU J5 (40-PIN):
13 = CAN+ (BLUE WIRE > BLUE TB), 14 = CAN-, 29/30 = COMM PAIR TO ETH MODULE J902.6/5, 33/34 = 60R 0.25W
RESISTOR CRIMPED INTO CONNECTOR (TRIM LEADS, CLEAR HEAT SHRINK, CRIMP WITH WIRES INTO PINS 33+34).
ETH J902 (24-PIN): 1 = +24V (FUSE 'ETH'), 13 = 0V, 6/5 = PAIR A TO MBMU J5.29/30, 22/21 = PAIR B TO MBMU
J5.33/34 (RESOLVED REV F: ROW-GEOMETRY + WIRE TRACE, ALL 3 CLUSTERS). 60R SITS ACROSS PAIR B AT THE MBMU
END. 9-12 AND 10-11 = CRIMPED JUMPERS. RJ45 = ETHERNET. SIGNAL FUNCTIONS OF PAIRS A/B PER CATL ICD.
USE 20AWG FOR ALL WIRES CRIMPED INTO MBMU AND ETH MODULE CONNECTORS (CARSON NOTE).
FIELD TB NUMBERING PER CARSON, 7 PER CABINET: 1 SLC S+ / 2 SLC S- / 3 CAN+ (BLUE) / 4 CAN- / 5 SHIELD (GREEN,
GROUNDED AT TB) / 6 SLC R+ / 7 SLC R-. INSTALL SNAP-IN NUMBER LABELS. SHIELD GROUNDS AT PANEL TB ONLY.
REV H - VERIFIED AGAINST OFFICIAL CATL DOCS: EXTERNAL WIRING DIAGRAM CHECKLIST CONFIRMS J3.1-17 JUMPER, J3.2/19=24V,
J902.1/13=24V, J5.29/30-J902.6/5, J5.33/34-J902.22/21 (CHECK READS -60R). J902 9-12 + 10-11 JUMPERS. NEW THIS REV:
REV K: FSS OPTION B SELECTED - MBMU J3.6/23 (OPTION A LOOP) LEFT UNWIRED WITH NO-CONNECTS, DO NOT WIRE. RELEASING CHAIN ON SHEET 9.
J5.13/14 = MCAN TO JX1_IN 9/10 (REV I/J); ETH HOUSING TO PE (REV H).
WIRE SPEC PER CATL: CAN + ALL MX34 CONNECTOR CRIMPS 0.5MM2/AWG20 TWISTED-PAIR SHIELDED, TWIST PITCH 20-30MM, SINGLE-POINT
GROUND. <=30M.MBMU-TO-END-TERMINAL (ELSE CANBRIDGE). CANH=YELLOW / CANL=GREEN / +24=RED / 0V=BLACK. LOOP PAIRS AWG16

FIRE ALARM: ARC-100 + CA-6075 CLASS A SLC, NAC, PCS FIRE TRIP (REV K)

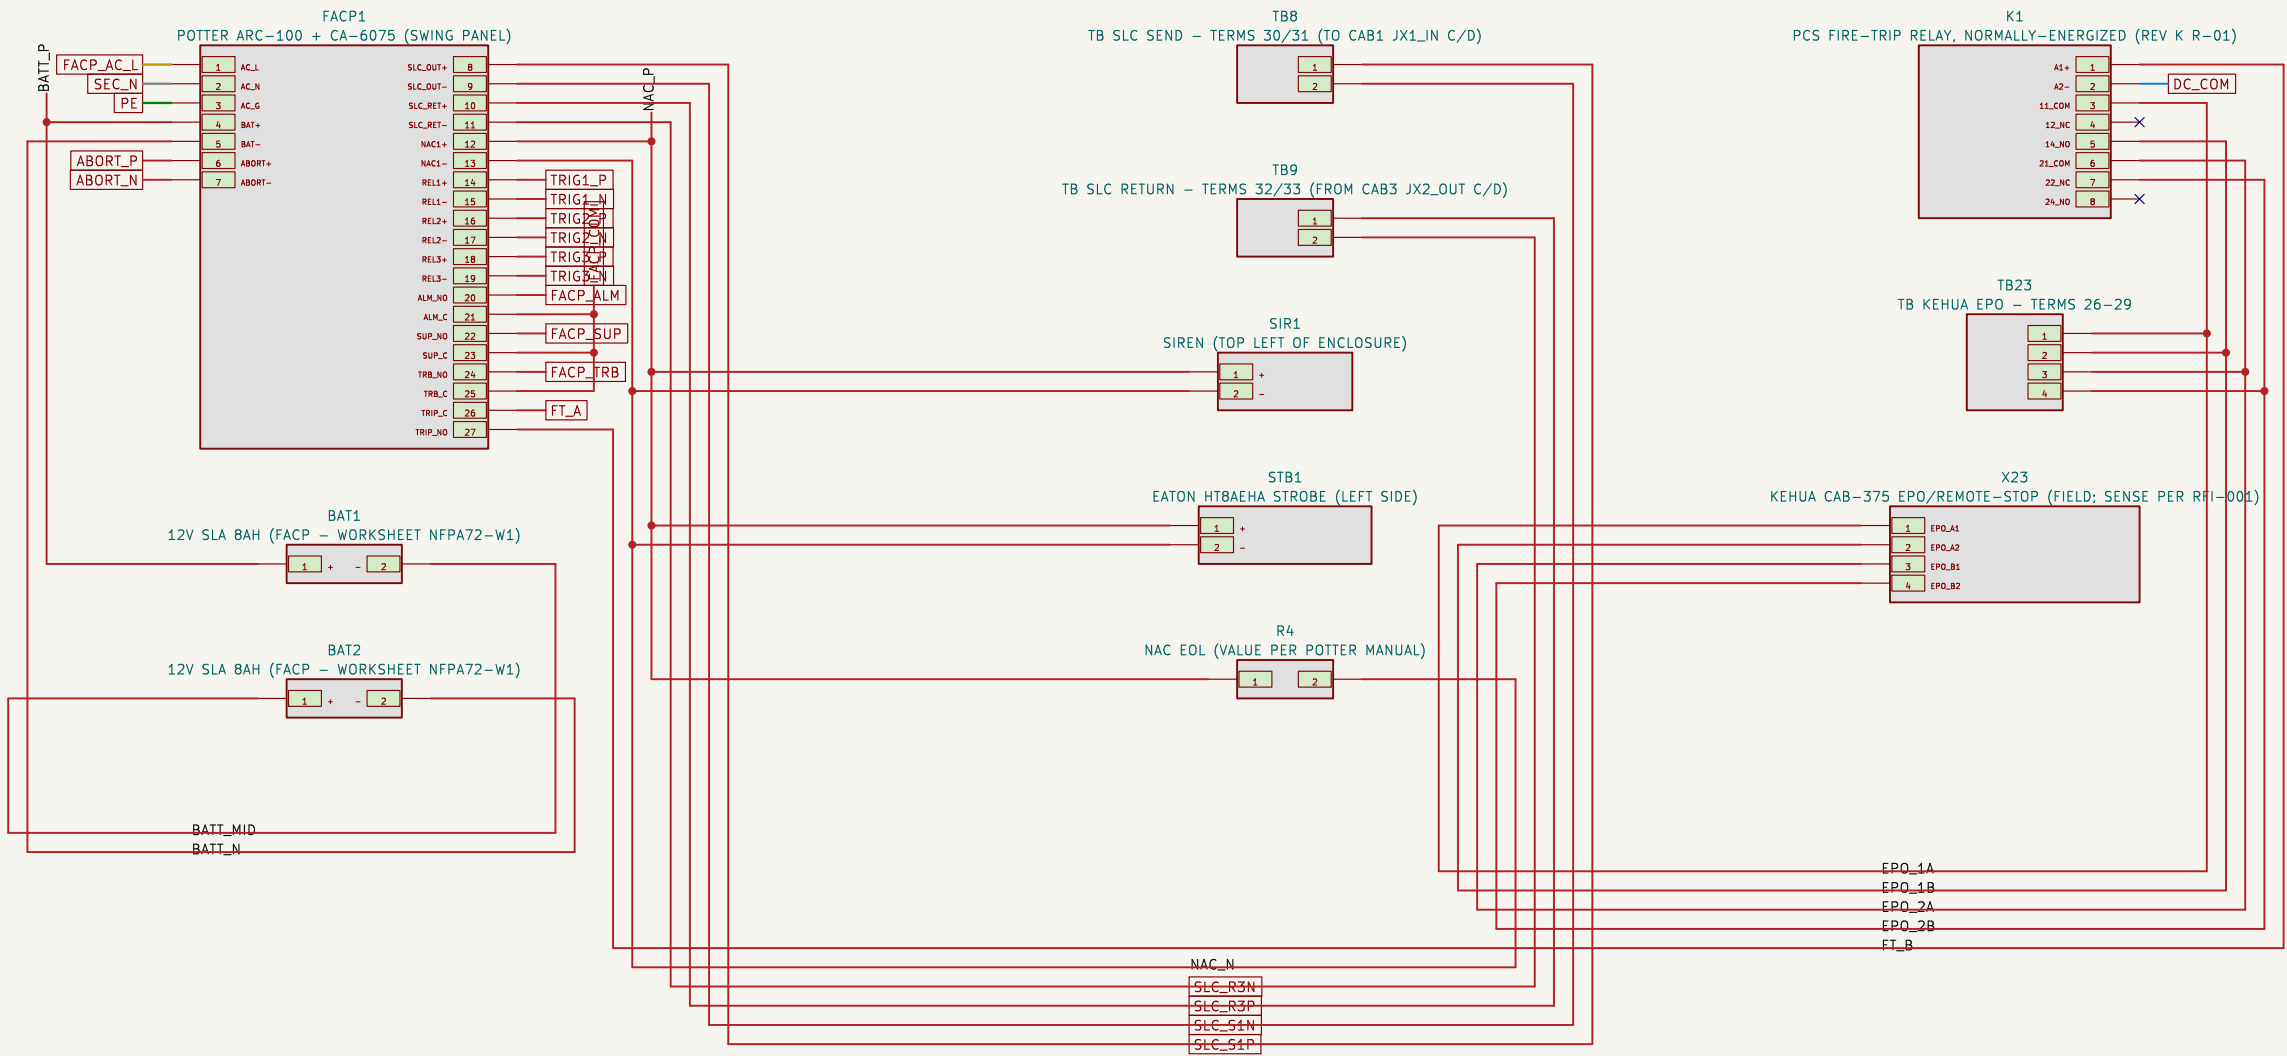

REV K FIRE-TRIP CHAIN (R-01): FACP RELAY 26/27 PROGRAMMED NORMALLY-ENERGIZED > F18 (SHEET 3, UPS-BACKED 24V) > K1 COIL. ALARM, FACP FAILURE, OR SUPPLY LOSS DROPS K1 > X23 DRY CONTACTS TO KEHUA EPO. CONTACT 1 OPENS TO STOP / CONTACT 2 CLOSES TO STOP - WIRE THE PAIR KEHUA SPECIFIES AT RFI-001, INSULATE AND PARK THE OTHER. FACP ALM/SUP/TRB MONITOR RELAYS PROGRAM N/C (OPEN = EVENT) SO A BROKEN CONDUCTOR OR DEAD COMMON ANNUNCIATES AT THE EMS (I01, SHEET 5). CLASS A SLC (REV K R-11): PANEL > CAB1 (JX1_IN C/D) > CAB2 > CAB3 > PANEL (JX2_OUT C/D). INTER-CABINET LEGS ARE RACK-TO-RACK FIELD WIRING - NOT THROUGH THIS PANEL. ROUTE RETURN LEG IN A SEPARATE RACEWAY FROM SEND LEG (NFPA 72 CLASS A SEPARATION). NAC EOL R4 AT ELECTRICALLY LAST DEVICE. 14-18 AWG FPL PER POTTER MANUAL + NFPA 72. BATTERY (WORKSHEET NFPA72-W1): 24H STANDBY 0.15045A = 3.611AH + 5MIN ALARM 3.9625A = 0.330AH, x1.2 = 4.73AH REQ > 2x 12V 8AH SELECTED. CATL MANUAL306 ALSO CITES 2H SOUND/LIGHT TERM - RESOLVE TERM WITH AHJ AT IFC (13.8AH IF 2H GOVERNS). FACP AMBIENT LIMIT 49C GOVERNS ENCLOSURE COOLING - HEAT BALANCE SHEET IN Z1SL-SCH-001. RELEASING ARCHITECTURE: FSS OPTION B SELECTED (REV K) - SEE SHEET 9. OPTION A (MBMU LOOP) NOT WIRED - DO NOT WIRE BOTH.

REVENUE METERING: EGAUGE EG4115 – PoI / SOLAR / BESS CTs (9 OF 15 USED)

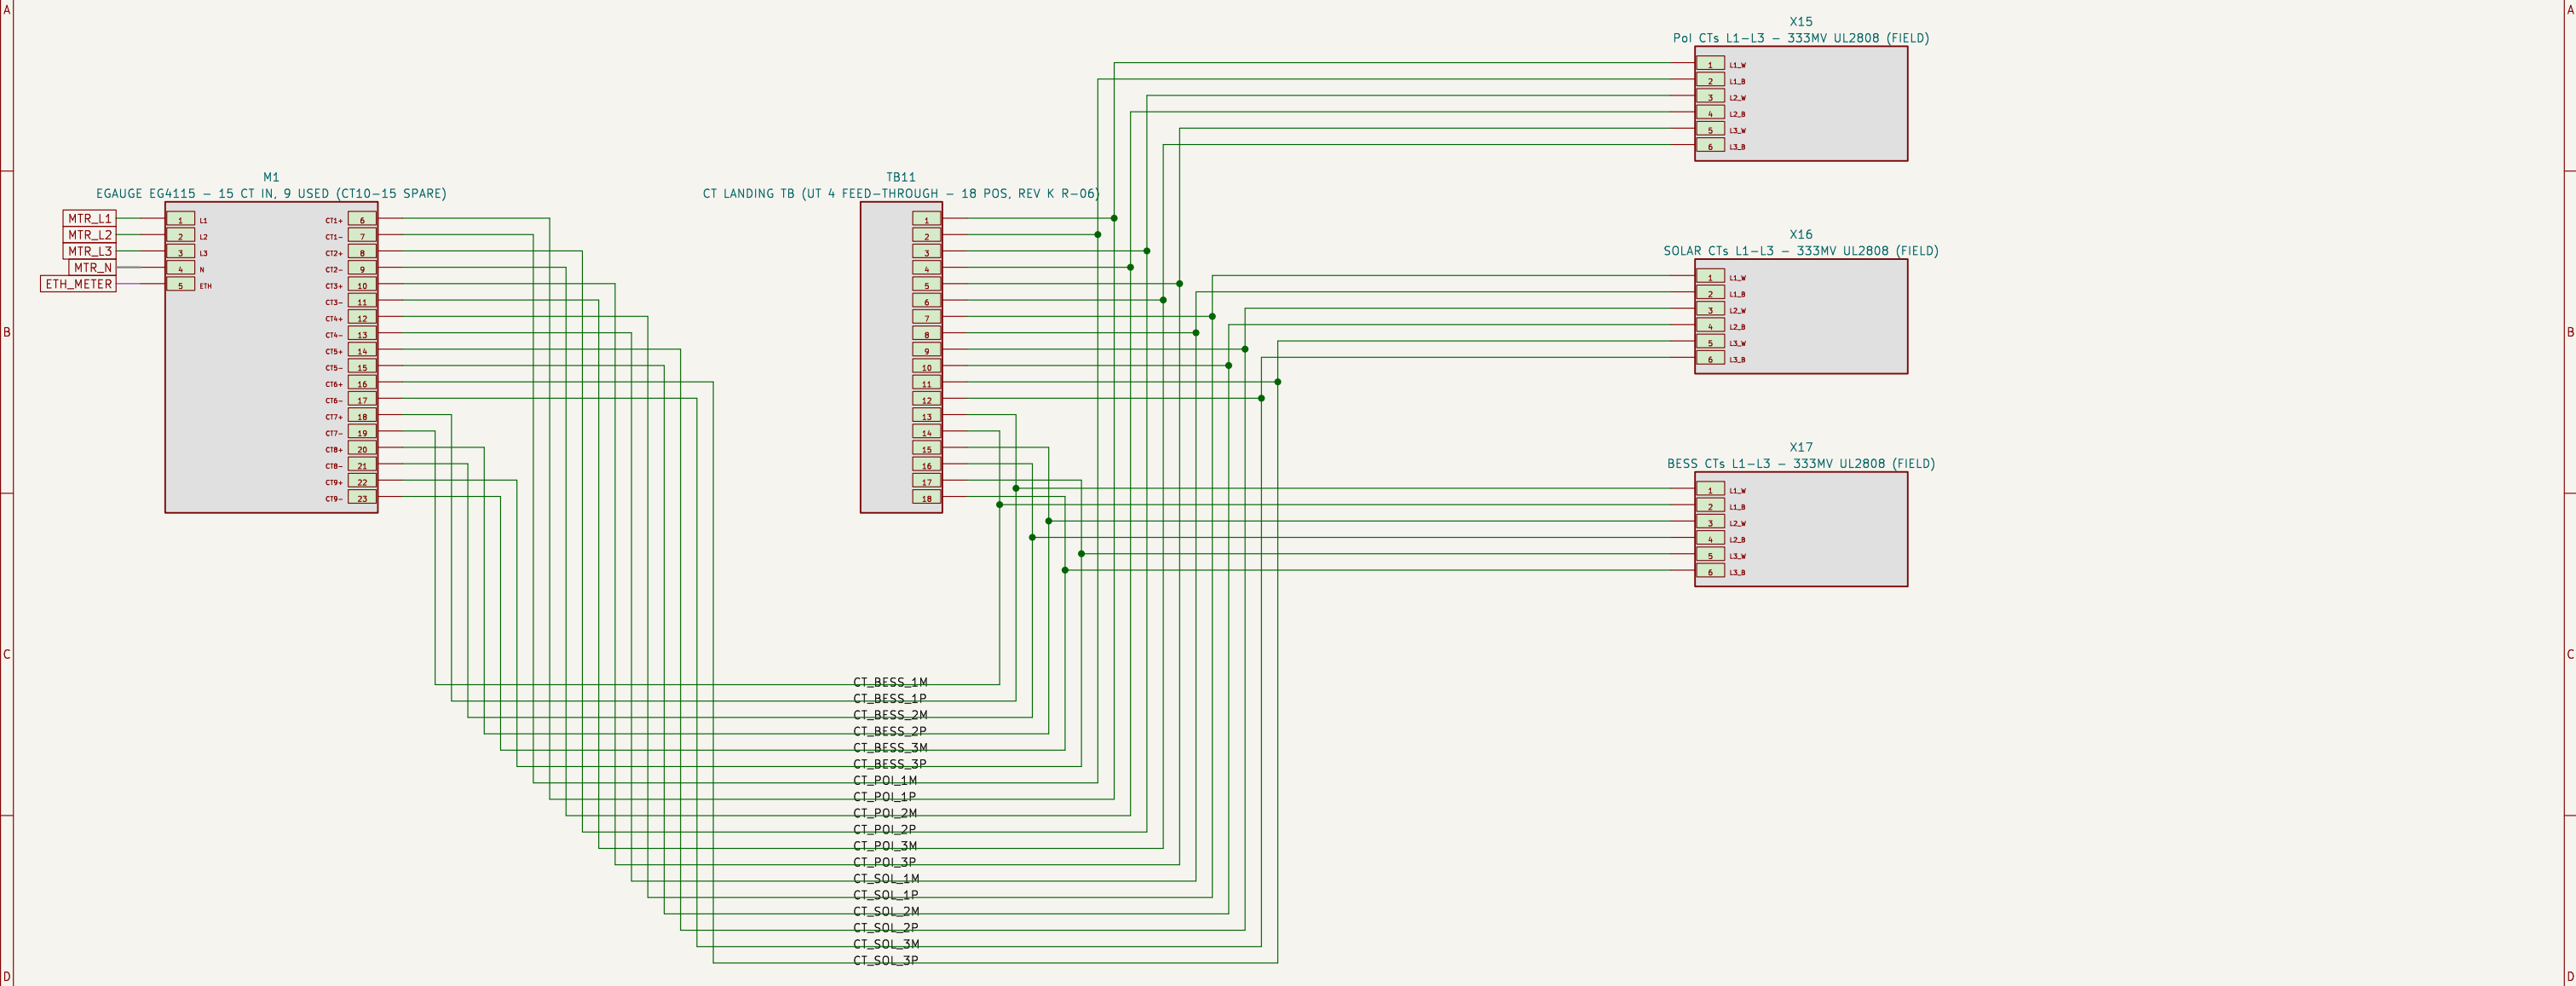

SCOPE DEVIATION: SINGLE METER REPLACES CARSON TWO-METER ARRANGEMENT (SCOPE 4.1 + 4.2). OBTAIN CLIENT APPROVAL.
EGAUGE CTs ARE 333MV VOLTAGE-OUTPUT (UL 2808) – OPEN-CIRCUIT SAFE. CT SHORTING BLOCKS NOT REQUIRED.
METER VOLTAGE REF FROM PT1 SECONDARY (SHEET 2) – VERIFY EGAUGE CONFIG MATCHES PT RATIO.
DOCUMENT CT RATIOS PER CHANNEL AT COMMISSIONING. MAINTAIN POLARITY (WHITE = SOURCE SIDE PER EGAUGE).
BESS CT LOCATION: COMBINED PCS OUTPUT FEEDER – CONFIRM SINGLE-POINT VS PER-PCS METERING WITH EOR.
METER VOLTAGE TAP WIRING: 14 OR 16 AWG (CARSON AS-BUILT NOTE). APPLY 480V ORANGE WARNING LABELS.

FSS RELEASING (OPTION B, REV K): PSN-1000, SERVICE DISCONNECT, CABINET AEROSOL CIRCUITS, ABORT + MANUAL RELEASE

PSN1
POTTER PSN-1000 RELEASING PSU 10A (3A/CKT) - REV K R-12

DS1
RELEASING SERVICE DISCONNECT - LOCKABLE + SUPERVISED (R-15)

MM1
SLC MONITOR: DS1 POSITION

MM2
SLC MONITOR: MANUAL RELEASE

MM3
SLC MONITOR: PSN1 TROUBLE

TB14
TB SUPPRESSION 24V (ONE CIRCUIT PER CABINET)

TB15
TB ABORT - TERMS 34/35

TB16
TB MANUAL RELEASE - TERMS 36/37

R10
MM1 INPUT EOL (AT DS1)

R12
MM3 INPUT EOL (AT PSN1)

R5
SUP1 EOL - INSTALL AT JX1 END (R-13)

R6
SUP2 EOL - INSTALL AT JX1 END

R7
SUP3 EOL - INSTALL AT JX1 END

R8
ABORT EOL (AT STATION)

R11
MANUAL-RELEASE EOL (AT STATION)

X12
CATL CAB1 JX1_IN: SLC C/D + AEROSOL 3/4 (FIELD)

X13
CATL CAB2 JX1_IN: AEROSOL 3/4 (FIELD)

X14
CATL CAB3 JX2_OUT: SLC RET C/D + AEROSOL 3/4 (FIELD)

X24
ABORT STATION (FIELD, AT CABINET LINE-UP)

X25
MANUAL RELEASE STATION (FIELD)

BAT3
12V SLA 8AH (PSN1 - OWN NFPA 72 CALC)

BAT4
12V SLA 8AH (PSN1)

ABORT_P

ABORT_N

PSN1_MON_A

PSN1_MON_B

PSN1_MON_C

PSN1_MON_D

PSN1_MON_E

PSN1_MON_F

PSN1_MON_G

PSN1_MON_H

PSN1_MON_I

PSN1_MON_J

PSN1_MON_K

PSN1_MON_L

PSN1_MON_M

PSN1_MON_N

PSN1_MON_O

PSN1_MON_P

PSN1_MON_Q

PSN1_MON_R

PSN1_MON_S

PSN1_MON_T

PSN1_MON_U

PSN1_MON_V

PSN1_MON_W

PSN1_MON_X

PSN1_MON_Y

PSN1_MON_Z

PSN1_MON_1

PSN1_MON_2

PSN1_MON_3

PSN1_MON_4

PSN1_MON_5

PSN1_MON_6

PSN1_MON_7

PSN1_MON_8

PSN1_MON_9

PSN1_MON_10

PSN1_MON_11

PSN1_MON_12

PSN1_MON_13

PSN1_MON_14

PSN1_MON_15

PSN1_MON_16

PSN1_MON_17

PSN1_MON_18

PSN1_MON_19

PSN1_MON_20

PSN1_MON_21

PSN1_MON_22

PSN1_MON_23

PSN1_MON_24

PSN1_MON_25

PSN1_MON_26

PSN1_MON_27

PSN1_MON_28

PSN1_MON_29

PSN1_MON_30

PSN1_MON_31

PSN1_MON_32

PSN1_MON_33

PSN1_MON_34

PSN1_MON_35

PSN1_MON_36

PSN1_MON_37

PSN1_MON_38

PSN1_MON_39

PSN1_MON_40

PSN1_MON_41

PSN1_MON_42

PSN1_MON_43

PSN1_MON_44

PSN1_MON_45

PSN1_MON_46

PSN1_MON_47

PSN1_MON_48

PSN1_MON_49

PSN1_MON_50

PSN1_MON_51

PSN1_MON_52

PSN1_MON_53

PSN1_MON_54

PSN1_MON_55

PSN1_MON_56

PSN1_MON_57

PSN1_MON_58

PSN1_MON_59

PSN1_MON_60

PSN1_MON_61

PSN1_MON_62

PSN1_MON_63

PSN1_MON_64

PSN1_MON_65

PSN1_MON_66

PSN1_MON_67

PSN1_MON_68

PSN1_MON_69

PSN1_MON_70

PSN1_MON_71

PSN1_MON_72

PSN1_MON_73

PSN1_MON_74

PSN1_MON_75

PSN1_MON_76

PSN1_MON_77

PSN1_MON_78

PSN1_MON_79

PSN1_MON_80

PSN1_MON_81

PSN1_MON_82

PSN1_MON_83

PSN1_MON_84

PSN1_MON_85

PSN1_MON_86

PSN1_MON_87

PSN1_MON_88

PSN1_MON_89

PSN1_MON_90

PSN1_MON_91

PSN1_MON_92

PSN1_MON_93

PSN1_MON_94

PSN1_MON_95

PSN1_MON_96

PSN1_MON_97

PSN1_MON_98

PSN1_MON_99

PSN1_MON_100

PSN1_MON_101

PSN1_MON_102

PSN1_MON_103

PSN1_MON_104

PSN1_MON_105

PSN1_MON_106

PSN1_MON_107

PSN1_MON_108

PSN1_MON_109

PSN1_MON_110

PSN1_MON_111

PSN1_MON_112

PSN1_MON_113

PSN1_MON_114

PSN1_MON_115

PSN1_MON_116

PSN1_MON_117

PSN1_MON_118

PSN1_MON_119

PSN1_MON_120

PSN1_MON_121

PSN1_MON_122

PSN1_MON_123

PSN1_MON_124

PSN1_MON_125

PSN1_MON_126

PSN1_MON_127

PSN1_MON_128

PSN1_MON_129

PSN1_MON_130

PSN1_MON_131

PSN1_MON_132

PSN1_MON_133

PSN1_MON_134

PSN1_MON_135

PSN1_MON_136

PSN1_MON_137

PSN1_MON_138

PSN1_MON_139

PSN1_MON_140

PSN1_MON_141

PSN1_MON_142

PSN1_MON_143

PSN1_MON_144

PSN1_MON_145

PSN1_MON_146

PSN1_MON_147

PSN1_MON_148

PSN1_MON_149

PSN1_MON_150

PSN1_MON_151

PSN1_MON_152

PSN1_MON_153

PSN1_MON_154

PSN1_MON_155

PSN1_MON_156

PSN1_MON_157

PSN1_MON_158

PSN1_MON_159

PSN1_MON_160

PSN1_MON_161

PSN1_MON_162

PSN1_MON_163

PSN1_MON_164

PSN1_MON_165

PSN1_MON_166

PSN1_MON_167

PSN1_MON_168

PSN1_MON_169

PSN1_MON_170

PSN1_MON_171

PSN1_MON_172

PSN1_MON_173

PSN1_MON_174

PSN1_MON_175

PSN1_MON_176

PSN1_MON_177

PSN1_MON_178

PSN1_MON_179

PSN1_MON_180

PSN1_MON_181

PSN1_MON_182

PSN1_MON_183

PSN1_MON_184

PSN1_MON_185

PSN1_MON_186

PSN1_MON_187

PSN1_MON_188

PSN1_MON_189

PSN1_MON_190

PSN1_MON_191

PSN1_MON_192

PSN1_MON_193

PSN1_MON_194

PSN1_MON_195

PSN1_MON_196

PSN1_MON_197

PSN1_MON_198

PSN1_MON_199

PSN1_MON_200

PSN1_MON_201

PSN1_MON_202

PSN1_MON_203

PSN1_MON_204

PSN1_MON_205

PSN1_MON_206

PSN1_MON_207

PSN1_MON_208

PSN1_MON_209

PSN1_MON_210

PSN1_MON_211

PSN1_MON_212

PSN1_MON_213

PSN1_MON_214

PSN1_MON_215

PSN1_MON_216

PSN1_MON_217

PSN1_MON_218

PSN1_MON_219

PSN1_MON_220

PSN1_MON_221

PSN1_MON_222

PSN1_MON_223

PSN1_MON_2

SUBMITTARY - STR MEDICAL - FOR REVIEW ONLY - NOT FOR CONSTRUCTION - PE REVIEW REQUIRED		
STR Medical		
Sheet: FSS Releasing - Option B/ File: fire_releasing.kicad_sch		
Title: z1Power - Sugarland BESS - FSS Releasing - Option B		
Size: A3	Date: 2026-08-09	Rev: K
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 9/9