Type : Lowpass
Response : Bessel
Order : 4
Number of Stages : 2

Filter Design Report

Design : Lowpass Filter - 4th order Bessel
Design ID: 166

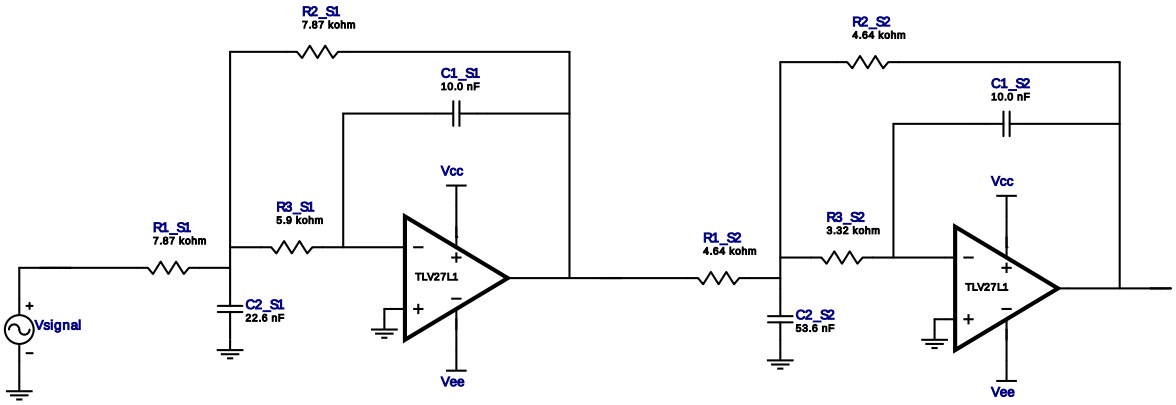

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty
1.	A1_S1	Texas Instruments Inc.	TLV27L1	GbwTyp= 0.16MHz VccMax= 16V VccMin= 2.7V	1
2.	A1_S2	Texas Instruments Inc.	TLV27L1	GbwTyp= 0.16MHz VccMax= 16V VccMin= 2.7V	1
3.	C1_S1	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
4.	C1_S2	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
5.	C2_S1	Generic	Ideal	Cap= 22.6 nF Tolerance= 2.0 %	1
6.	C2_S2	Generic	Ideal	Cap= 53.6 nF Tolerance= 2.0 %	1
7.	R1_S1	Generic	Ideal	Res= 7870.0ohm Tolerance= 1%	1
8.	R1_S2	Generic	Ideal	Res= 4640.0ohm Tolerance= 1%	1
9.	R2_S1	Generic	Ideal	Res= 7870.0ohm Tolerance= 1%	1
10.	R2_S2	Generic	Ideal	Res= 4640.0ohm Tolerance= 1%	1
11.	R3_S1	Generic	Ideal	Res= 5900.0ohm Tolerance= 1%	1
12.	R3_S2	Generic	Ideal	Res= 3320.0ohm Tolerance= 1%	1

Sensitivity Analysis

#	Name	Series	Tolerance
1.	Cap	E48	2%
2.	Res	E96	1%

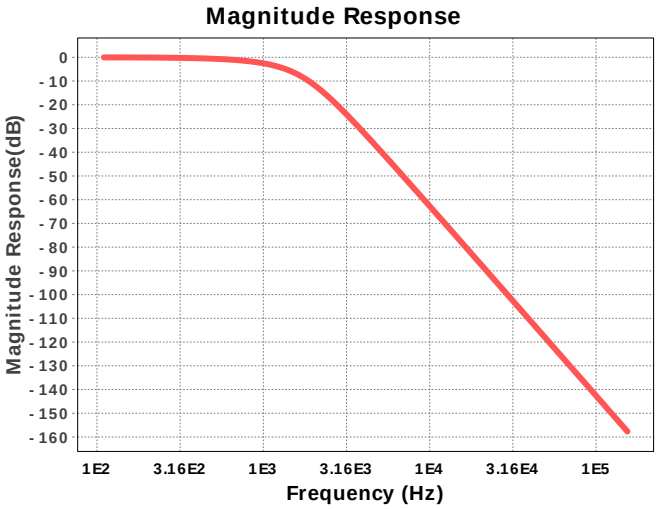

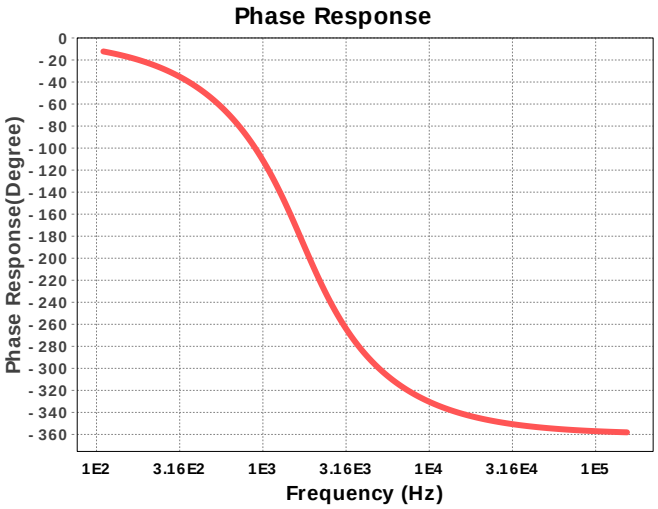

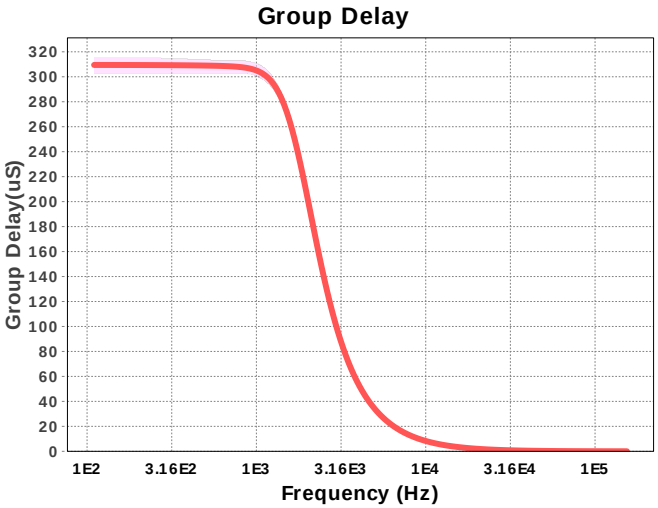

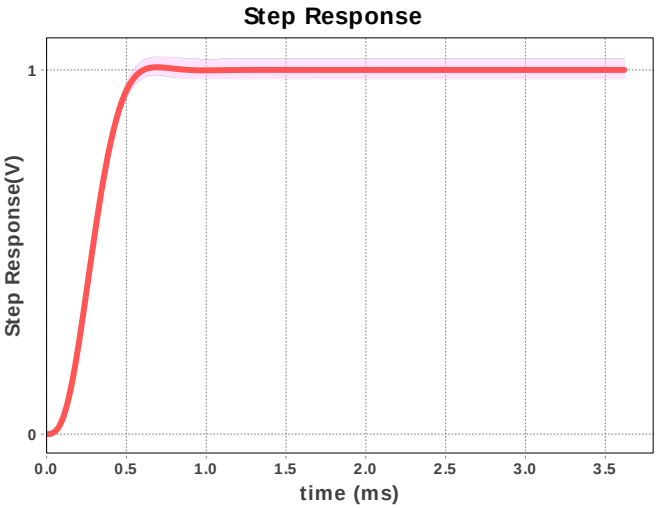

Design Inputs

#	Name	Value	Description
1.	FilterType	lowpass	
2.	FilterResponse	Bessel	
3.	FilterOrder	4.0	
4.	FilterTopology	Multiple Feedback	
5.	NumberOfStages	2.0	
6.	PassbandFrequency	1.1 k	
7.	StopbandAttenuation	-78.912	
8.	StopbandFrequency	16.0 k	
9.	Gain	1.0	
10.	DualSupply	+/-5.00 V	Power supply(s) to active chips
11.	ResistorTolerance	E96	Resistor series - 1% Passive resistor tolerance
12.	CapacitorTolerance	E48	Capacitor series - 2% Passive capacitor tolerance

Design Assistance

1. **TLV27L1** Product Folder : http://www.ti.com/product/TLV27L1 : contains the data sheet and other resources.

Filter Stage :1

Cutoff Frequency	1.554 kHz
Min GBW Reqd	81.482 kHz
Stage Gain	1.0 V/V
Stage Q	520.791 m
Stage Topology	Multiple Feedback

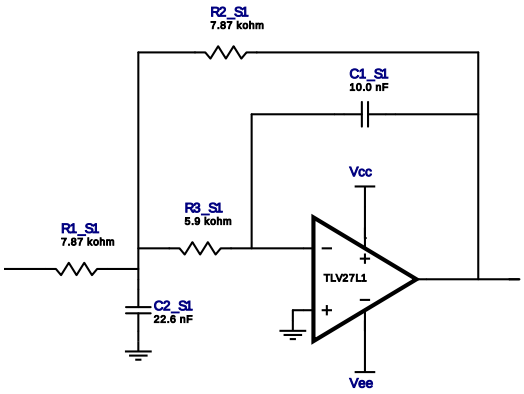

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty
1.	A1_S1	Texas Instruments Inc.	TLV27L1	GbwTyp= 0.16MHz VccMax= 16V VccMin= 2.7V	1
2.	C1_S1	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
3.	C2_S1	Generic	Ideal	Cap= 22.6 nF Tolerance= 2.0 %	1
4.	R1_S1	Generic	Ideal	Res= 7870.0ohm Tolerance= 1%	1
5.	R2_S1	Generic	Ideal	Res= 7870.0ohm Tolerance= 1%	1
6.	R3_S1	Generic	Ideal	Res= 5900.0ohm Tolerance= 1%	1

Filter Stage :2

Cutoff Frequency	1.751 kHz
Min GBW Reqd	140.997 kHz
Stage Gain	1.0 V/V
Stage Q	805.566 m
Stage Topology	Multiple Feedback

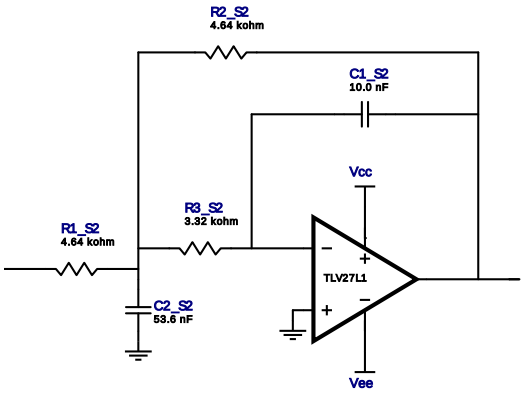

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty
1.	A1_S2	Texas Instruments Inc.	TLV27L1	GbwTyp= 0.16MHz VccMax= 16V VccMin= 2.7V	1
2.	C1_S2	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
3.	C2_S2	Generic	Ideal	Cap= 53.6 nF Tolerance= 2.0 %	1
4.	R1_S2	Generic	Ideal	Res= 4640.0ohm Tolerance= 1%	1
5.	R2_S2	Generic	Ideal	Res= 4640.0ohm Tolerance= 1%	1
6.	R3_S2	Generic	Ideal	Res= 3320.0ohm Tolerance= 1%	1