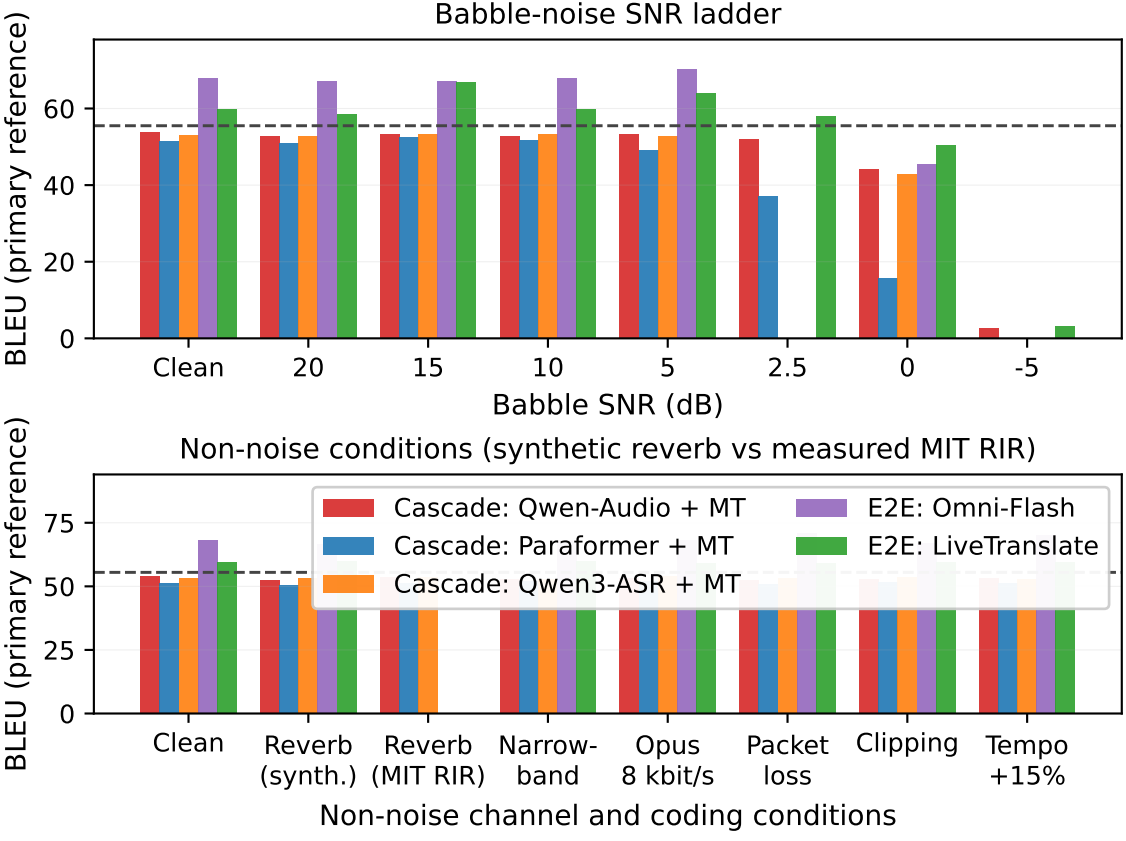
Babble-noise SNR ladder
BLEU (primary reference)
0
20
40
60
Clean
20
15
10
5
2.5
0
-5
Babble SNR (dB)
Non-noise conditions (synthetic reverb vs measured MIT RIR)
BLEU (primary reference)
0
25
50
75
Cascade: Qwen-Audio + MT
Cascade: Paraformer + MT
Cascade: Qwen3-ASR + MT
E2E: Omni-Flash
E2E: LiveTranslate
Clean
Reverb (synth.)
Reverb (MIT RIR)
Narrow-band
Opus 8 kbit/s
Packet loss
Clipping
Tempo +15%
Non-noise channel and coding conditions