


DEVLAB I2C INERTIAL SENSOR MODULE

DevLab I2C MPU-6050 6-Axis IMU Module

Mfr. Part #: UE0129

Version 0.1.0

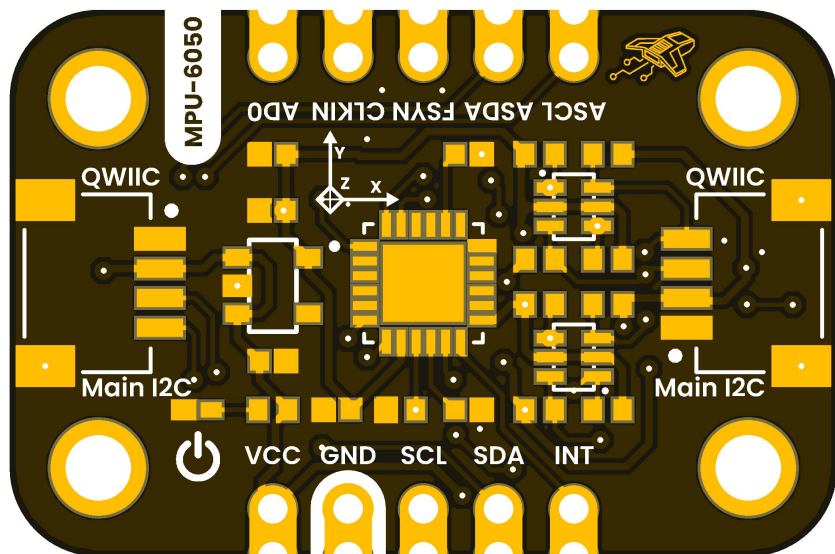

MPU-6050 module with three-axis acceleration and angular-rate sensing, main and auxiliary I2C connections, and onboard 3.3 V regulation.

I2C

6-AXIS IMU

ACCELEROMETER


GYROSCOPE

Contents

- **Description**
 - **Applications**
 - **Hardware Features**
- **1 The Module**
 - **1.1 Board Identification**
 - **1.2 Package Contents**
- **2 Electrical Characteristics**
 - **2.1 Confirmed Circuit Values**
 - **2.2 Electrical Precautions**
- **3 Functional Overview**
 - **3.1 Sensor and Main I2C Path**
 - **3.2 Auxiliary and Control Signals**
 - **3.3 Power Section**
- **4 Connectors and Pinout**
 - **4.1 Main Interface Edge (J2)**
 - **4.2 Auxiliary and Control Edge (J5)**
 - **4.3 Four-Position Connectors**
 - **4.4 Solder Options**
- **5 Board Operation**
- **6 Mechanical Information**
- **7 Company Information**
- **8 Reference Documentation**
- **9 Appendix**
 - **9.1 Source Hierarchy**
 - **9.2 Items Pending Validation**
 - **9.3 Document Control**

Description

The UNIT DevLab I2C MPU-6050 6-Axis IMU Module combines a three-axis accelerometer and a three-axis gyroscope. The board routes the MPU-6050 main and auxiliary I2C buses, interrupt and synchronization signals, and includes 3.3 V regulation and I2C level shifting.

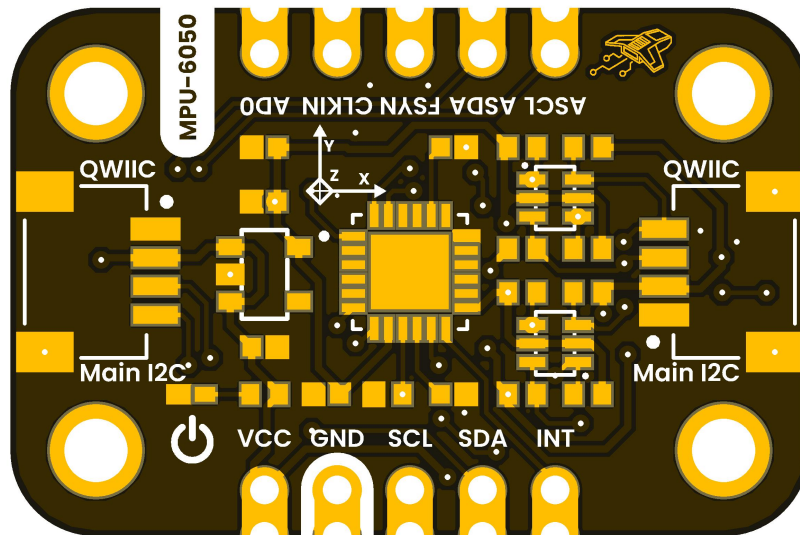

Applications

- Evaluation of acceleration and angular-rate sensing
- Motion-sensing prototypes
- I2C sensor integration and educational experiments
- Experiments using interrupt, synchronization, and auxiliary-sensor signals

Hardware Features

- MPU-6050 three-axis accelerometer and three-axis gyroscope
- Six 16-bit ADCs, one for each accelerometer and gyroscope axis
- Selectable accelerometer ranges of ± 2 g, ± 4 g, ± 8 g, and ± 16 g
- Selectable gyroscope ranges of ± 250 , ± 500 , ± 1000 , and ± 2000 dps
- 1024-byte sensor FIFO and digital-output temperature sensor
- Main I2C bus on two board connectors and an edge connection
- Auxiliary I2C bus on two board connectors and an edge connection
- INT, AD0, FSYNC, and CLKIN signals
- AP2112K-3.3 fixed 3.3 V regulator
- Two BSS138AKDW dual N-channel MOSFET arrays for I2C level shifting
- Red power indicator
- Four mounting holes and ten edge connections shown by the board artwork

1 The Module

1.1 Board Identification

Item	Value
Product	DevLab: I2C MPU-6050 6-Axis IMU Module
Manufacturer part number	UE0129
Hardware revision	V1.0
Inertial sensor	MPU-6050
Host interface	I2C
Product-reference revision	0.1.0

1.2 Package Contents

The BOM includes one four-pin, 1 mm-pitch harness. Package contents and cable compatibility have not been formally validated; confirm them with the distributor before purchase or integration.

2 Electrical Characteristics

2.1 Confirmed Circuit Values

Symbol / parameter	Description	Value	Scope
VDD	Operating supply	2.375 to 3.46 V	MPU-6050 sensor pins
VLOGIC	Logic reference	1.71 V to VDD	MPU-6050 sensor pin
Accelerometer range	Selectable full scale	± 2 , ± 4 , ± 8 , or ± 16 g	MPU-6050 sensor
Gyroscope range	Selectable full scale	± 250 , ± 500 , ± 1000 , or ± 2000 dps	MPU-6050 sensor
ADC word length	Per accelerometer / gyroscope axis	16 bit	MPU-6050 sensor
I2C operating frequency	Fast-mode maximum	400 kHz	MPU-6050 sensor interface
Six-axis current	Gyroscope + accelerometer, DMP disabled	3.8 mA typical	MPU-6050 sensor only
Six-axis + DMP current	Gyroscope + accelerometer + DMP	3.9 mA typical	MPU-6050 sensor only
3V3	Regulated output from U2	3.3 V nominal	AP2112K-3.3 regulator output
C1, C2	Regulator input/output capacitors	1 μ F each	Individual BOM components
R5	Power-indicator series resistor	4.7 k Ω	Individual BOM component
R1–R4, R6–R10	Pull-up / bias resistors	10 k Ω each	Individual BOM components

The allowed voltage at the module VCC connections, module current consumption, host-side digital thresholds, and complete-module I2C clock limit are **pending validation**. The sensor, regulator, connector, MOSFET, resistor, and capacitor component ratings are not ratings for the complete module.

2.2 Electrical Precautions

- Establish a common GND before applying power or interface signals.
- Verify the module-level VCC range before applying power.
- Keep host signals within validated logic levels; those limits are not yet documented for the complete module.
- Treat INT as an output from the sensor and CLKIN, FSYNC, and AD0 as sensor inputs according to the released schematic.

3 Functional Overview

3.1 Sensor and Main I2C Path


The MPU-6050 provides three-axis acceleration and three-axis angular-rate sensing with 16-bit conversion per axis and selectable full-scale ranges. Its 1024-byte FIFO can buffer sensor data. Q1 translates the main SCL and SDA lines between the module VCC domain and the sensor's regulated 3.3 V domain. J1, J3, and J2 provide access to the main bus.

3.2 Auxiliary and Control Signals

Q2 translates the MPU-6050 auxiliary AUX_SCL and AUX_SDA lines to the board ASCL and ASDA connections. The board also routes INT, AD0, FSYNC, and CLKIN. The schematic shows R6 connected from AD0 to ground; the physical defaults of the solder options shown in the artwork remain pending validation.

3.3 Power Section

The schematic identifies U2 as an AP2112K-3.3 regulator supplied from VCC. Its 3.3 V output powers both MPU-6050 supply pins and the sensor-side I2C pull-ups. The complete module input range is pending validation and must not be derived from the regulator's component rating.

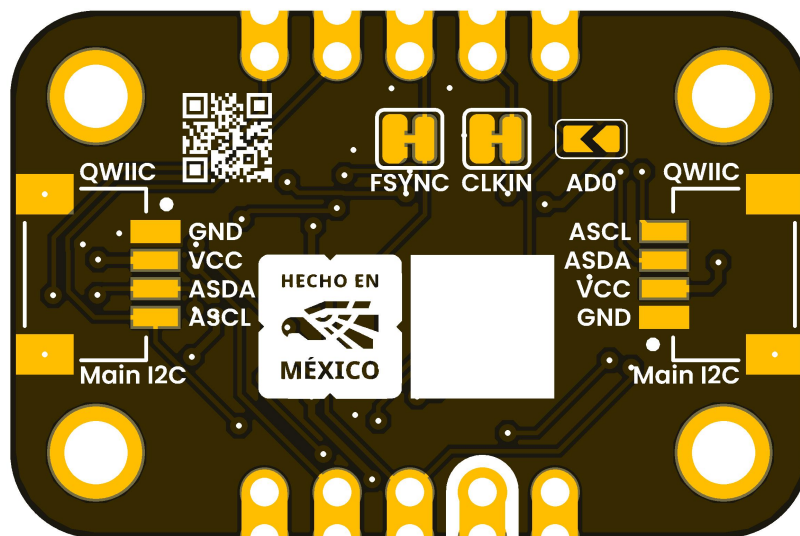

4 Connectors and Pinout

4.1 Main Interface Edge (J2)

Board label	Direction / type	Function
VCC	Power input	Module input rail; allowed range pending validation
GND	Power	Common ground
SCL	I2C clock	Main host-side I2C clock
SDA	I2C data	Main host-side I2C data
INT	Output	MPU-6050 interrupt signal

4.2 Auxiliary and Control Edge (J5)

Board label	Direction / type	Function
AD0	Input	MPU-6050 I2C address-selection input
CLKIN	Input	External clock input to the MPU-6050
FSYNC	Input	Frame-synchronization input
ASCL	I2C clock	Host-side auxiliary I2C clock
ASDA	I2C data	Host-side auxiliary I2C data

4.3 Four-Position Connectors

Reference	Signals	Bus
J1, J3	VCC, GND, SDA, SCL	Main I2C
J4, J6	VCC, GND, ASDA, ASCL	Auxiliary I2C

The BOM identifies all four as JST SM04B-SRSS-TB(LF) (SN) connectors. The artwork labels them QWIIC, but connector orientation, numeric pin numbering, and cable compatibility must be verified before assembly or connection.

4.4 Solder Options

The bottom artwork identifies options for FSYNC, CLKIN, and AD0. Their default copper states and intended operating configurations are pending validation.

5 Board Operation


The DevLab_MPU6050 firmware under `software/examples/arduino/` is experimental and is intentionally not reproduced here as a validated example. It configures host GPIO 12 as SDA, host GPIO 22 as SCL, sensor address 0x68, and a 400 kHz I2C clock. The GPIO values are controller assignments, not module pin numbers, and the complete setup remains pending validation.

For initial bench evaluation:

1. Inspect the board and confirm the intended connector orientation.
2. Verify the module VCC range from an approved test record before applying power.
3. Connect module and host grounds.
4. Connect the host I2C clock and data lines to SCL and SDA.
5. Verify the AD0 configuration against the physical board. The sensor datasheet assigns 7-bit address 0x68 when AD0 is low and 0x69 when it is high.
6. Confirm communication and sensor configuration with test equipment before relying on measurement data.

Host GPIO numbers belong to the controller, not the module. Module-level I2C clock validation, board-default address, configuration sequences, and example firmware are pending testing.

6 Mechanical Information

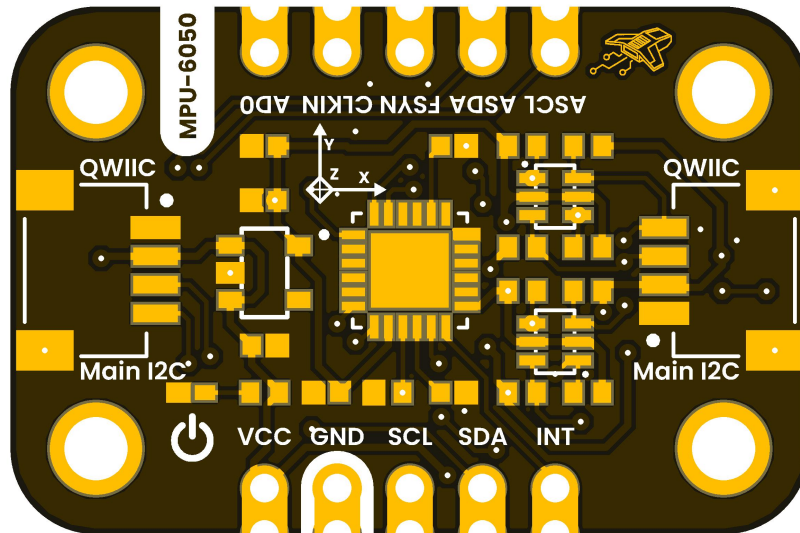

The artwork shows four mounting holes and ten castellated edge connections. A controlled dimensional drawing has not been supplied, so board dimensions, hole diameters, and mounting-hole coordinates are **pending validation**. Do not scale dimensions from the rendered image.

7 Company Information

Item	Information
Company	UNIT Electronics
Website	https://uelectronics.com/
Address	Salvador 19, Cuauhtémoc, 06000 Mexico City, CDMX, Mexico

Product specifications and documentation may be revised. Use the repository and product page listed in the next chapter for the latest released material.

8 Reference Documentation

Reference	Location
Repository	UNIT-Electronics-MX/unit_devlab_i2c_mpu6050_6_axis_imu
Hardware notes	Hardware README
Sensor datasheet	MPU-6000 and MPU-6050 Product Specification, Revision 3.4
Module schematic	V1.0 schematic
Manufacturing BOM	V1.0 BOM
Experimental firmware	DevLab_MPU6050 basic readout

Sensor values in this reference are taken from the MPU-6050 portions of the Revision 3.4 product specification. Module-level limits require separate board validation.

9 Appendix

9.1 Source Hierarchy

This product reference uses the MPU-6000 and MPU-6050 Product Specification, Revision 3.4 for sensor characteristics, the released schematic for circuit connectivity, the manufacturing BOM for fitted component identities and values, and the supplied top and bottom artwork for visible labels and physical features. A future approved dimensional drawing and validation report take precedence if they conflict with this edition.

9.2 Items Pending Validation

- Module VCC operating and absolute-maximum ratings
- Module current consumption and host-side logic levels
- Module-level I2C clock testing, board-default address, and configuration sequences
- Board dimensions and mounting-hole coordinates
- Solder-option defaults and connector orientation
- Cable and ecosystem compatibility
- Validated firmware examples and measurement results

9.3 Document Control

Field	Value
Product	DevLab: I2C MPU-6050 6-Axis IMU Module
Manufacturer part number	UE0129
Hardware revision	V1.0
Product-reference revision	0.1.0
Publication date	2026-08-03
Firmware status	Experimental; not validated by this edition