
PRODUCT REFERENCE MANUAL

DEVLAB I2C INERTIAL SENSOR MODULE

DevLab I2C MPU-6050 6-Axis IMU Module

MPN: UE0129

Version 0.2.0

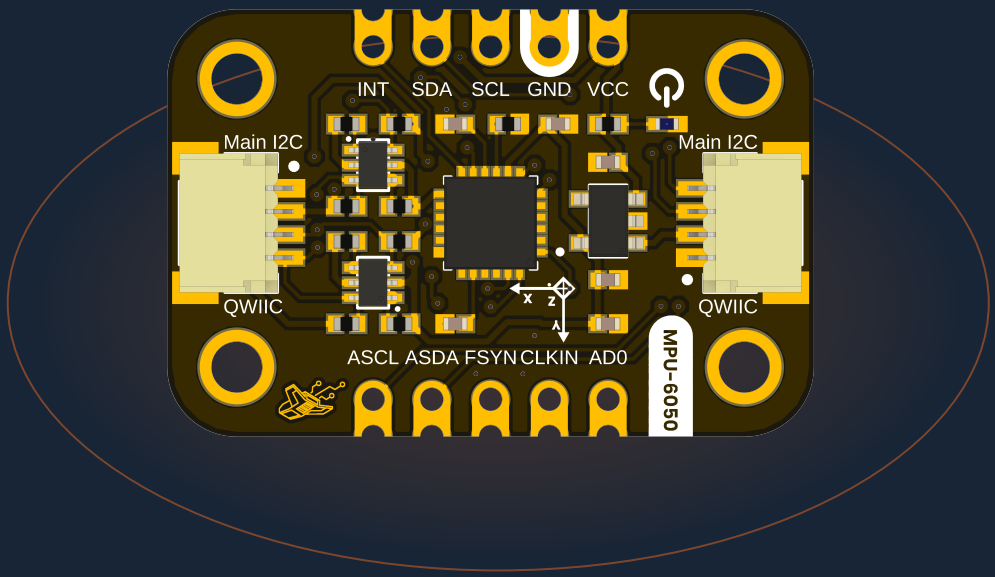

MPU-6050 module with three-axis acceleration and angular-rate sensing, main and auxiliary I2C connections, and onboard 3.3 V regulation.

I2C | 6-AXIS IMU | ACCELEROMETER | GYROSCOPE


DOCUMENT MAP

Contents

- Description
  - Applications
  - Hardware Features
- 1 The Module
  - 1.1 Board Identification
  - 1.2 Package Contents
- 2 Electrical Characteristics
  - 2.1 Confirmed Circuit Values
  - 2.2 Electrical Precautions
- 3 Functional Overview
  - 3.1 Sensor and Main I2C Path
  - 3.2 Auxiliary and Control Signals
  - 3.3 Power Section
  - 3.4 Communication Interfaces
  - 3.5 Library Features
  - 3.6 Board Topology
  - 3.7 Electrical Schematic
- 4 Connectors and Pinout
  - 4.1 Main Interface Edge (J2)
  - 4.2 Auxiliary and Control Edge (J5)
  - 4.3 Four-Position Connectors
  - 4.4 Solder Options
- 5 Board Operation
- 6 Mechanical Information
- 7 Company Information
- 8 Reference Documentation
- 9 Appendix
  - 9.1 Source Hierarchy
  - 9.2 Items Pending Validation
  - 9.3 Document Control

Description

The UNIT DevLab I2C MPU-6050 6-Axis IMU Module combines a three-axis accelerometer and a three-axis gyroscope. The board routes the MPU-6050 main and auxiliary I2C buses, interrupt and synchronization signals, and includes 3.3 V regulation and I2C level shifting.

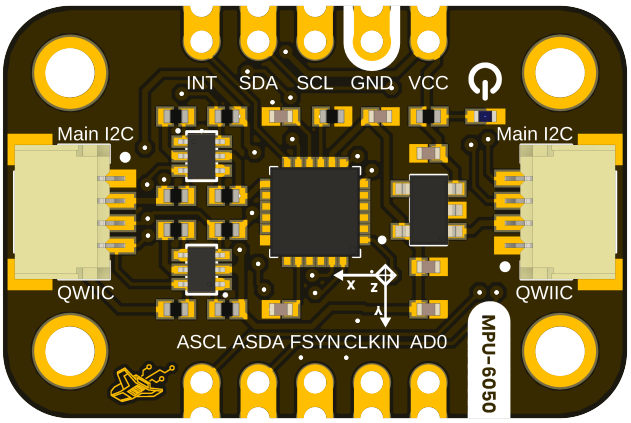

Top view of the UE0129 module.

Applications

- Evaluation of acceleration and angular-rate sensing
- Motion-sensing prototypes
- I2C sensor integration and educational experiments
- Experiments using interrupt, synchronization, and auxiliary-sensor signals

Hardware Features

- MPU-6050 three-axis accelerometer and three-axis gyroscope
- Six 16-bit ADCs, one for each accelerometer and gyroscope axis
- Selectable accelerometer ranges of ±2 g, ±4 g, ±8 g, and ±16 g
- Selectable gyroscope ranges of ±250, ±500, ±1000, and ±2000 dps
- 1024-byte sensor FIFO and digital-output temperature sensor
- Main I2C bus on two board connectors and an edge connection
- Auxiliary I2C bus on two board connectors and an edge connection
- `INT`, `AD0`, `FSYNC`, and `CLKIN` signals
- AP2112K-3.3 fixed 3.3 V regulator
- Two BSS138AKDW dual N-channel MOSFET arrays for I2C level shifting
- Red power indicator
- Four mounting holes and ten edge connections shown by the board artwork

1 The Module

1.1 Board Identification

Item	Value
Product	DevLab: I2C MPU-6050 6-Axis IMU Module
Manufacturer part number	UE0129
Hardware revision	V1.0
Inertial sensor	MPU-6050
Host interface	I2C
Product-reference revision	0.2.0

1.2 Package Contents

The BOM includes one four-pin, 1 mm-pitch harness. Package contents and cable compatibility have not been formally validated; confirm them with the distributor before purchase or integration.

2 Electrical Characteristics

2.1 Confirmed Circuit Values

Symbol / parameter	Description	Value	Scope
VDD	Operating supply	2.375 to 3.46 V	MPU-6050 sensor pins
VLOGIC	Logic reference	1.71 V to VDD	MPU-6050 sensor pin
Accelerometer range	Selectable full scale	±2, ±4, ±8, or ±16 g	MPU-6050 sensor
Gyroscope range	Selectable full scale	±250, ±500, ±1000, or ±2000 dps	MPU-6050 sensor
ADC word length	Per accelerometer / gyroscope axis	16 bit	MPU-6050 sensor
I2C operating frequency	Fast-mode maximum	400 kHz	MPU-6050 sensor interface
Six-axis current	Gyroscope + accelerometer, DMP disabled	3.8 mA typical	MPU-6050 sensor only
Six-axis + DMP current	Gyroscope + accelerometer + DMP	3.9 mA typical	MPU-6050 sensor only
3V3	Regulated output from U2	3.3 V nominal	AP2112K-3.3 regulator output
C1, C2	Regulator input/output capacitors	1 µF each	Individual BOM components
R5	Power-indicator series resistor	4.7 kΩ	Individual BOM component
R1–R4, R6–R10	Pull-up / bias resistors	10 kΩ each	Individual BOM components

The allowed voltage at the module VCC connections, module current consumption, host-side digital thresholds, and complete-module I2C clock limit are **pending validation**. The sensor, regulator, connector, MOSFET, resistor, and capacitor component ratings are not ratings for the complete module.

2.2 Electrical Precautions

- Establish a common GND before applying power or interface signals.
- Verify the module-level VCC range before applying power.
- Keep host signals within validated logic levels; those limits are not yet documented for the complete module.
- Treat INT as an output from the sensor and CLKIN, FSYNC, and AD0 as sensor inputs according to the released schematic.

3 Functional Overview

3.1 Sensor and Main I2C Path


The MPU-6050 provides three-axis acceleration and three-axis angular-rate sensing with 16-bit conversion per axis and selectable full-scale ranges. Its 1024-byte FIFO can buffer sensor data. Q1 translates the main SCL and SDA lines between the module VCC domain and the sensor's regulated 3.3 V domain. J1, J3, and J2 provide access to the main bus.

3.2 Auxiliary and Control Signals

Q2 translates the MPU-6050 auxiliary AUX_SCL and AUX_SDA lines to the board ASCL and ASDA connections. The board also routes INT, AD0, FSYNC, and CLKIN. The schematic shows R6 connected from AD0 to ground; the physical defaults of the solder options shown in the artwork remain pending validation.

3.3 Power Section

The schematic identifies U2 as an AP2112K-3.3 regulator supplied from VCC. Its 3.3 V output powers both MPU-6050 supply pins and the sensor-side I2C pull-ups. The complete module input range is pending validation and must not be derived from the regulator's component rating.

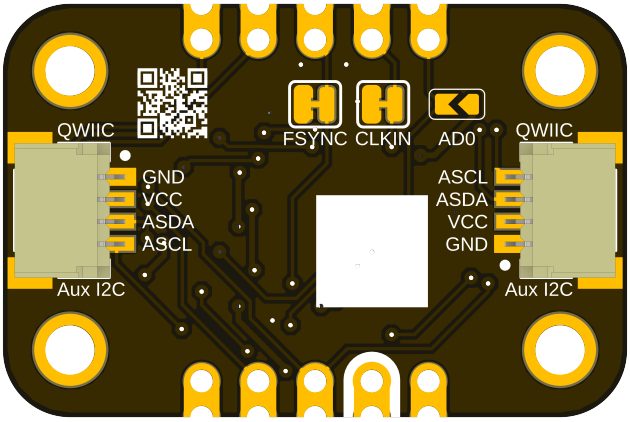

Bottom view of the UE0129 module, artwork V1.1.

3.4 Communication Interfaces

The MPU-6050 supports a single digital communication interface, I²C, providing connectivity with microcontrollers and embedded systems.

I²C Interface

- Standard Mode and Fast Mode
- Clock frequency up to 400 kHz
- Two selectable 7-bit I²C addresses: 0x68 and 0x69
- I²C address selection through the AD0 pin

The device supports two selectable 7-bit I²C addresses through the AD0 pin: when AD0 is low, the address is 0x68; when AD0 is high, the address is 0x69. On the DevLab module, AD0 is routed to the J5 connector and has a 10 kΩ resistor (R6) to ground. The physical default of the AD0 solder option remains pending validation, so confirm the address on the board before use.

3.5 Library Features

The DevLab_MPU6050 library for Arduino-compatible boards communicates with the sensor through direct I²C register access. It is tested on ESP32 and compatible with other Arduino-compatible boards. The following table summarizes the sensor functions available through the library.

Function	Library call	Description
Initialization	`begin(sda, scl, clock)`	Starts I²C on custom pins (400 kHz by default), verifies WHO_AM_I, wakes the sensor, and applies the default configuration.
Data acquisition	`readData(data)`	Reads raw 16-bit accelerometer and gyroscope values for X, Y, and Z in a single 14-byte burst, plus the temperature in °C.
Accelerometer range	`setAccelScale(scale)`	Selects ±2 g, ±4 g, ±8 g, or ±16 g (values 0 to 3).
Gyroscope range	`setGyroScale(scale)`	Selects ±250, ±500, ±1000, or ±2000 °/s (values 0 to 3).
Digital low-pass filter	`setDLPF(setting)`	Selects the DLPF configuration in the CONFIG register (values 0 to 6).
Sample rate	`sampleRateDiv(div)`	Sets the sample rate divider (SMPLRT_DIV).
Clock source	`setClkSource(source)`	Selects the clock source in PWR_MGMT_1 (values 0 to 7).
Device identification	`WhoAmI()`	Returns the WHO_AM_I register value.
Interrupt pin	`setIntPinCfg(cfg)`	Configures INT polarity, output type, latch, clear-on-read, FSYNC, and I²C bypass.
Interrupt sources	`enableInterrupt()`, `disableInterrupt()`	Enables or disables data ready, I²C master, FIFO overflow, and motion interrupts.
Interrupt status	`interruptStatus()`	Reads INT_STATUS to identify which source fired.

The I²C address is passed to the library constructor and is not detected automatically. Use MPU6050_ADDRESS_AD0_LOW (0x68) or MPU6050_ADDRESS_AD0_HIGH (0x69) according to the AD0 level. The WHO_AM_I check in `begin()` expects 0x68 regardless of the selected address.

Default configuration applied by `begin()`

Parameter	Default value
Clock source	PLL with X-axis gyroscope reference
Sample rate divider	7
Digital low-pass filter	Configuration 6
Gyroscope range	±500 °/s

Parameter	Default value
Accelerometer range	±8 g


Use the configuration functions above to change these values after calling `begin()`.

Example sketches

- `BasicRead` and `MPU6050_BasicRead`: read acceleration, angular rate, and temperature and print them over the serial port.
- `I2CIdentify`: initializes the sensor and reads the `WHO_AM_I` register.
- `MPU6050_ConfigSweep`: sweeps every combination of accelerometer range, gyroscope range, and DLPF setting and prints one reading per combination as CSV, useful for characterizing each setting.
- `basic_Interrupt` and `MPU6050_Interrupt`: enable the data-ready interrupt on the `INT` pin and count the interrupts it generates.

3.6 Board Topology


The released topology drawing locates the sensor, regulator, level shifters, connectors, and solder options on the top and bottom sides of the board.

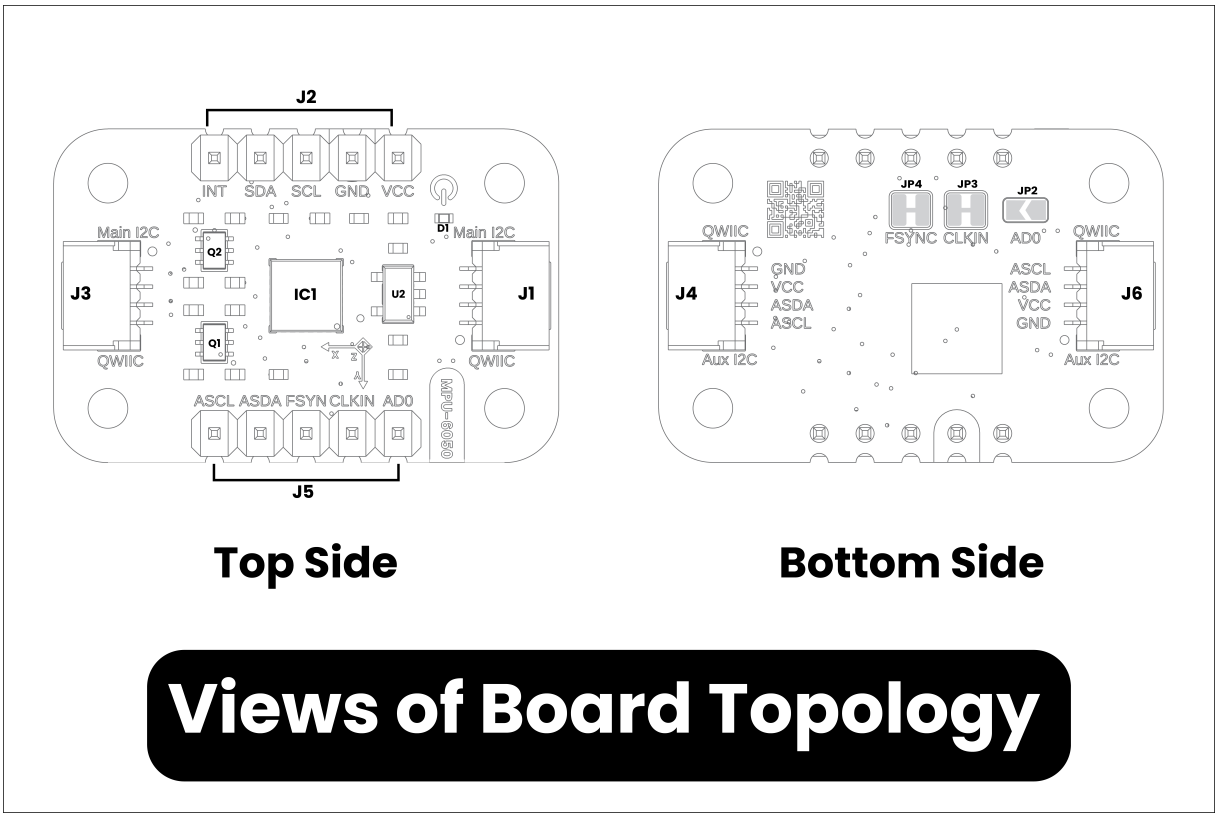

Top and bottom board topology.

3.7 Electrical Schematic


The image below is rendered from the released V1.0 schematic. Use the original schematic PDF to inspect small component and net labels at full resolution.

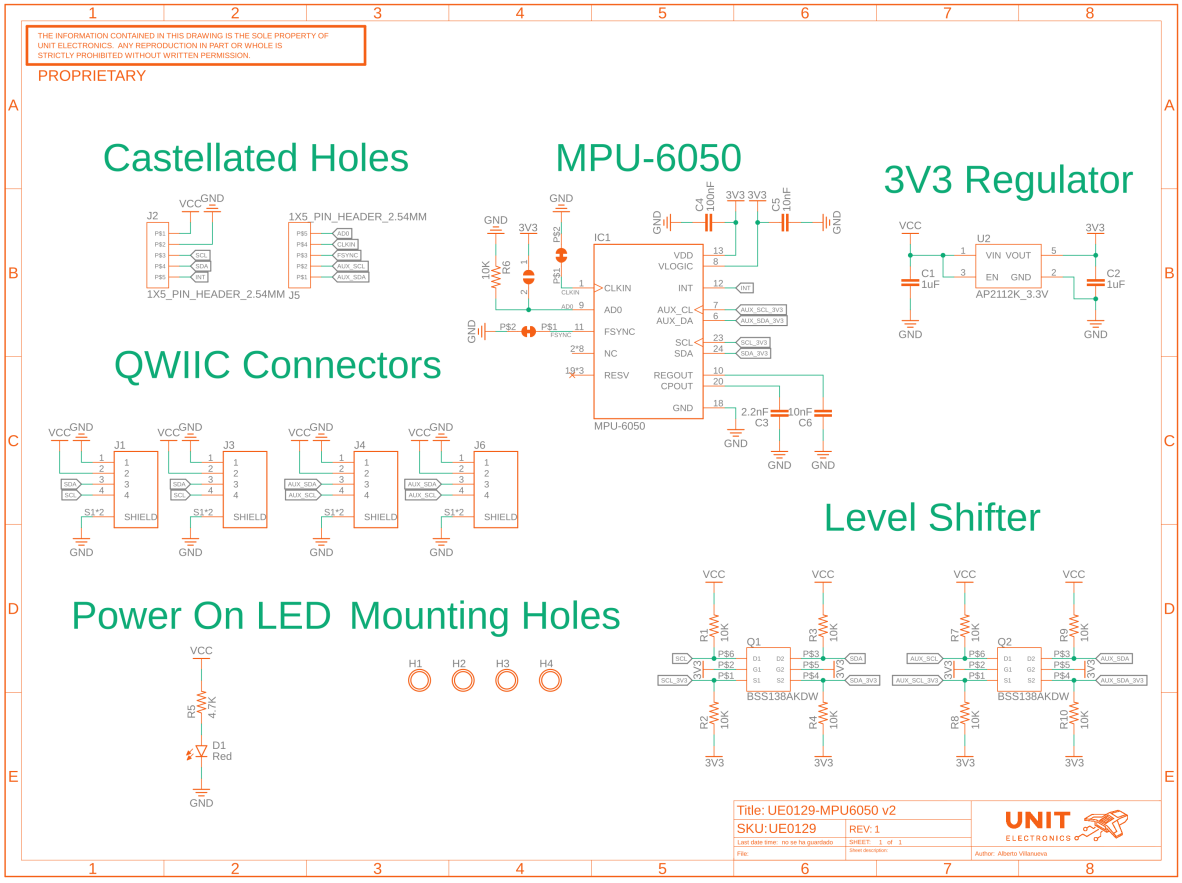

V1.0 electrical schematic.

4 Connectors and Pinout

The released pinout drawing shows the top and bottom board views and the connector signal labels. Confirm connector orientation on the physical board before assigning numeric pin positions or connecting a cable.

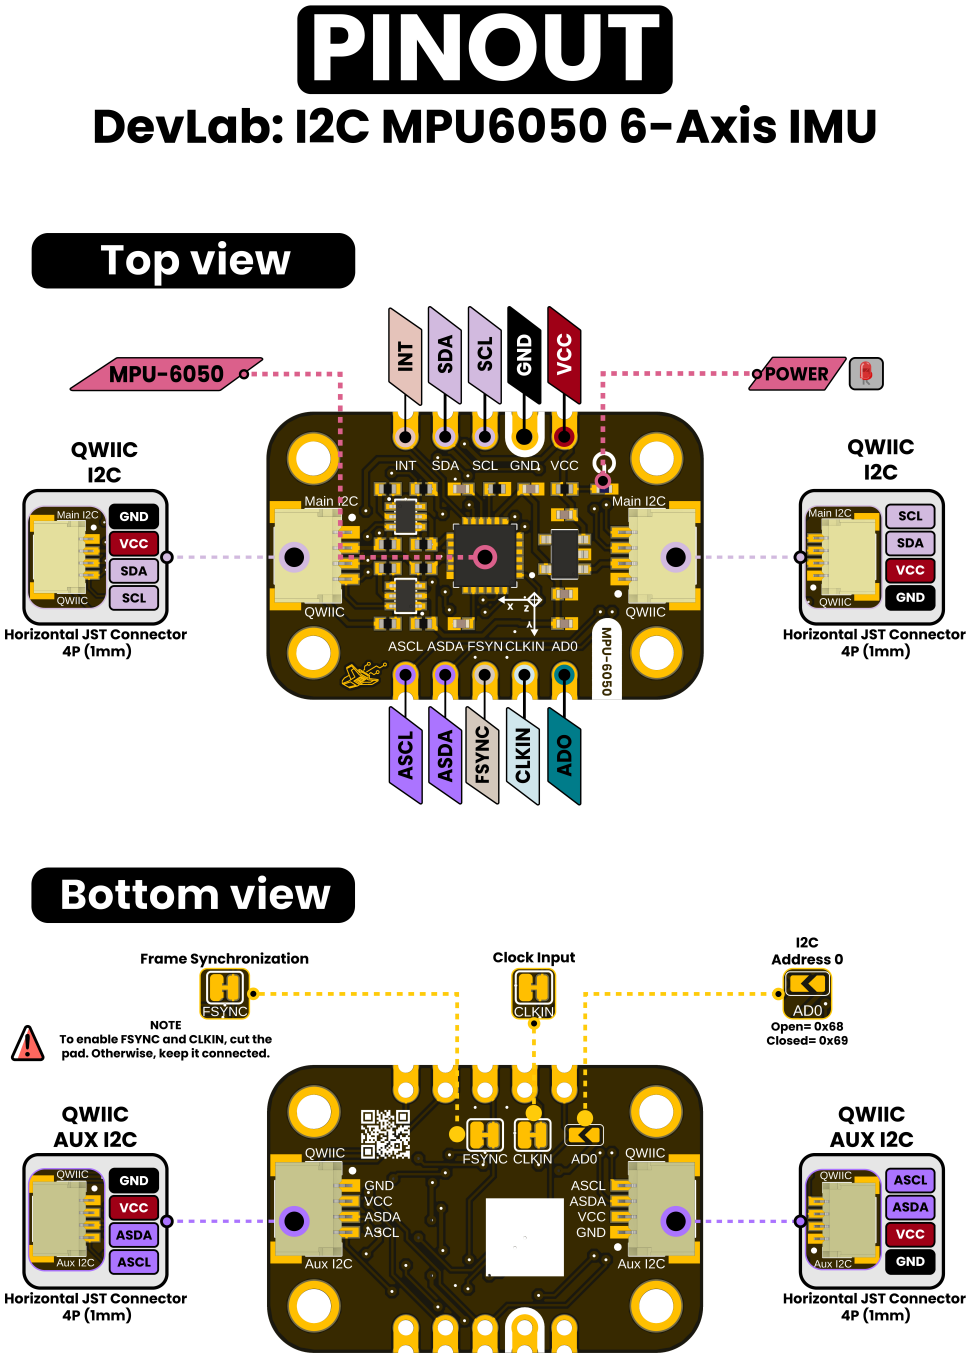

UE0129 pinout, top and bottom views.

4.1 Main Interface Edge (J2)

Board label	Direction / type	Function
VCC	Power input	Module input rail; allowed range pending validation

Board label	Direction / type	Function
GND	Power	Common ground
SCL	I2C clock	Main host-side I2C clock
SDA	I2C data	Main host-side I2C data
INT	Output	MPU-6050 interrupt signal

4.2 Auxiliary and Control Edge (J5)

Board label	Direction / type	Function
AD0	Input	MPU-6050 I2C address-selection input
CLKIN	Input	External clock input to the MPU-6050
FSYNC	Input	Frame-synchronization input
ASCL	I2C clock	Host-side auxiliary I2C clock
ASDA	I2C data	Host-side auxiliary I2C data

4.3 Four-Position Connectors

Reference	Signals	Bus
J1, J3	VCC, GND, SDA, SCL	Main I2C
J4, J6	VCC, GND, ASDA, ASCL	Auxiliary I2C

The BOM identifies all four as JST SM04B-SRSS-TB(LF)(SN) connectors. The artwork labels them QWIIC, but connector orientation, numeric pin numbering, and cable compatibility must be verified before assembly or connection.

4.4 Solder Options

The bottom artwork identifies options for FSYNC, CLKIN, and AD0. Their default copper states and intended operating configurations are pending validation.

5 Board Operation


The DevLab_MPU6050 firmware under software/examples/arduino/ is experimental and is intentionally not reproduced here as a validated example. It configures host GPIO 12 as SDA, host GPIO 22 as SCL, sensor address 0x68, and a 400 kHz I2C clock. The GPIO values are controller assignments, not module pin numbers, and the complete setup remains pending validation.

For initial bench evaluation:

1. Inspect the board and confirm the intended connector orientation.
2. Verify the module VCC range from an approved test record before applying power.
3. Connect module and host grounds.
4. Connect the host I2C clock and data lines to SCL and SDA.
5. Verify the AD0 configuration against the physical board. The sensor datasheet assigns 7-bit address 0x68 when AD0 is low and 0x69 when it is high.
6. Confirm communication and sensor configuration with test equipment before relying on measurement data.

Host GPIO numbers belong to the controller, not the module. Module-level I2C clock validation, board-default address, configuration sequences, and example firmware are pending testing.

6 Mechanical Information

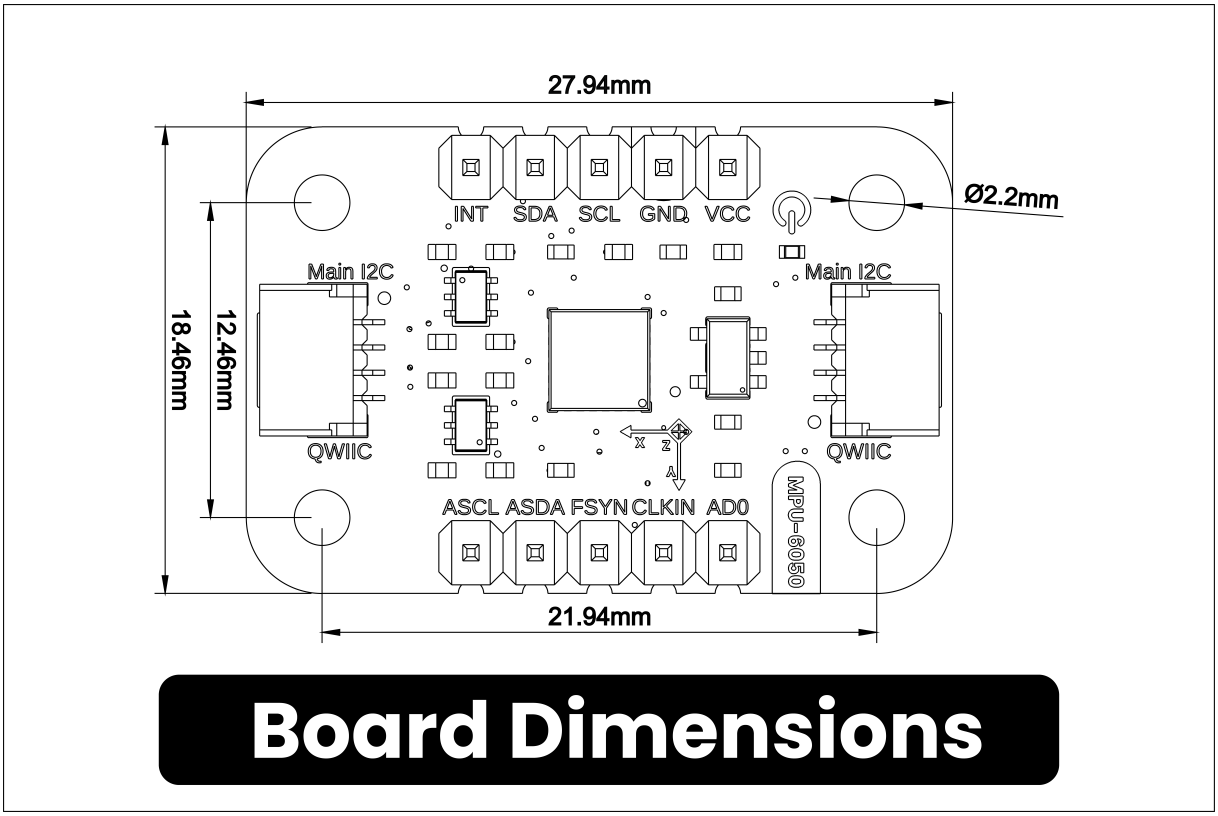

Released board dimensions drawing.

The released drawing labels a 27.94 × 18.46 mm board outline, four Ø2.2 mm mounting holes, and 21.94 × 12.46 mm hole-center spacing. The drawing also shows ten castellated edge connections. These are drawing values; mechanical tolerances and fit remain **pending validation**. Use the labeled dimensions rather than scaling the image.

7 Company Information

Item	Information
Company	UNIT Electronics
Website	https://uelectronics.com/
Address	Salvador 19, Cuauhtémoc, 06000 Mexico City, CDMX, Mexico

Product specifications and documentation may be revised. Use the repository and product page listed in the next chapter for the latest released material.

8 Reference Documentation

Reference	Location
Repository	UNIT-Electronics-MX/unit_devlab_i2c_mpu6050_6_axis_imu
Hardware notes	Hardware README
Sensor datasheet	MPU-6000 and MPU-6050 Product Specification, Revision 3.4
Module schematic	V1.0 schematic
Schematic image	V1.0 schematic PNG
Pinout	English PDF · Spanish PDF
Board topology	Top and bottom topology drawing
Board dimensions	Dimensioned drawing
Manufacturing BOM	V1.0 BOM
Experimental firmware	DevLab_MPU6050 basic readout

Sensor values in this reference are taken from the MPU-6050 portions of the Revision 3.4 product specification. Module-level limits require separate board validation.

9 Appendix

9.1 Source Hierarchy

This product reference uses the MPU-6000 and MPU-6050 Product Specification, Revision 3.4 for sensor characteristics, the released schematic for circuit connectivity, the manufacturing BOM for fitted component identities and values, and the released pinout, topology, board views, and dimensioned drawing for visible labels and physical features. A future approved validation report takes precedence if it conflicts with this edition.

9.2 Items Pending Validation

- Module VCC operating and absolute-maximum ratings
- Module current consumption and host-side logic levels
- Module-level I2C clock testing, board-default address, and configuration sequences
- Mechanical tolerances and physical fit against the dimensioned drawing
- Solder-option defaults and connector orientation
- Cable and ecosystem compatibility
- Validated firmware examples and measurement results

9.3 Document Control

Field	Value
Product	DevLab: I2C MPU-6050 6-Axis IMU Module
Manufacturer part number	UE0129
Hardware revision	V1.0
Product-reference revision	0.2.0
Publication date	2026-10-21
Firmware status	Experimental; not validated by this edition