TEST REPORT

Application No.:	SHEM2608005891LM
Applicant:	Fuzhou Hengyi Home Furnishing Co., Ltd.
Address of Applicant:	No.167, Xuzhuli, Beishan Village, Heshang Town, Changle District, Fuzhou, Fujian, China
Manufacturer:	Fuzhou Hengyi Home Furnishing Co., Ltd.
Address of Manufacturer:	No.167, Xuzhuli, Beishan Village, Heshang Town, Changle District, Fuzhou, Fujian, China
Equipment Under Test (EUT):	
EUT Name:	Holiday Lighted Decoration
Model No.:	G61000084, G61000539, G61000256, G61000287, G61000414, G61000268, G61000276, G61000192, G57000342, G61000275, G61000269, G61000272, G61000279, G61000544, G61000545, G61000537, G61000546, G61000280, G61000445, G61000538, G61000019, G57000339, G61000020, G57000340, G61000022, G57000341, G61000274, G61000281, G61000190, G61000072, G57000351, G61000191, G61000278, G61000277, G61000442, G61000447, G61000448, G61000443, G61000446, G61000413, G61000024, G61000273, G61000288, G61000283, G61000284, G61000548, G61000578, G61000534, G61000535, G61000270, G61000286, G61000282, G61000540, G61000541, G61000542, G61000285, G61000536, G61000444, G61000266, G61000049, G61000025, G61000075, G57000348, G61000260, G61000261, G61000262, G61000550, G61000547, G61000549, G61000083, G61000085, G61000450, G61000449, G57000350, G57000349, G61000073, G61000417, G61000487, G61000429, G61000489, G61000265, G61000264, G61000263, G61000543, G61000082, G61000550, G61000547, G61000887, G61000886, G61000892, G61000900, G61000890, G61000891, G61001007, G61000888, G61000889, G61001008, G61001009, G61001010, G61000998, G61000997, G61000999, G61001006
Remark:	Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) :	EN 61000-3-3: 2013 +A1:2019 +A2:2021 EN IEC 55015: 2019+A11:2020 EN IEC 61000-3-2: 2019 +A1:2021 +A2:2024 EN IEC 61547: 2023
Date of Receipt:	2025-07-30
Date of Test:	2025-07-30 to 2025-08-01
Date of Issue:	2025-08-05

Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.
Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Member of the SGS Group (SGS SA)

Revision Record			
Version	**Description**	**Date**	**Remark**
00	Add Models and Photos	2026-08-10	Based on SHEM250700517901

Authorized for issue by:				
Tested By		Lemon Zhang **Lemon Zhang/Project Engineer**		
Approved By		Parlam Zhan **Parlam Zhan / Reviewer**		

2 Test Summary

Emission Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Conducted Emissions at Mains Terminals (9kHz-30MHz)	EN IEC 55015: 2019+A11:2020	CISPR 16-2-1: 2014+A1:2017	Table 1	Pass
Radiated Emissions (30MHz-1GHz)		CISPR 16-2-3: 2016 +A1:2019 +A2:2023	Table 10	Pass
Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz) 0.6m loop		CISPR 16-2-3: 2016 +A1:2019 +A2:2023	Table 9	Pass
Harmonic Current Emission	EN IEC 61000-3-2: 2019 +A1:2021 +A2:2024	EN IEC 61000-3-2: 2019 +A1:2021 +A2:2024	Class C	N/A
Voltage Fluctuations and Flicker	EN 61000-3-3: 2013 +A1:2019 +A2:2021	EN 61000-3-3: 2013 +A1:2019 +A2:2021	Clause 5	Pass

N/A: Not applicable. Please refer to Section 6.4 of this report for details.

Immunity Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Electrostatic Discharge	EN IEC 61547: 2023	EN 61000-4-2:2009	±4kV Contact Discharge, ±8kV Air Discharge	Pass
Radiated Immunity (80MHz-1GHz)		EN IEC 61000-4-3:2020	3V/m, 80%, 1kHz Amp. Mod,1% increment	Pass
Electrical Fast Transients Burst at AC Mains Power Port		EN 61000-4-4:2012	1kV, 5/50ns Tr/Td, 5kHz Repetition Frequency	Pass
Surge at Power Port		EN 61000-4-5:2014+A1:2017	1.2/50μs Tr/Td, ±1.0kV Line to Line	Pass
Conducted Immunity at AC Mains Power Port (150kHz-80MHz)		EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass
Voltage Dips and Interruptions		EN IEC 61000-4-11:2020	0 % UT for 0.5cycle, 70 % UT for 10cycles, UT is Supply Voltage	Pass

Note1: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model G61000084 was tested since their differences were the model number, LED numbers, LED color, decoration and appearance.

Note2: We add models (refer to page 1) in this report. The new models mentioned in this report are the same as the original models, in Electronic or Electrical characters. Which were already EMC tested in the report SHEM250700517901. So the new models in this report are deemed to fulfil the EMC requirements without testing.

3 Contents

Page

1 COVER PAGE 1

2 Test Summary 3

3 Contents 4

4 General Information 6

4.1 Details of E.U.T. 6
4.2 Description of Support Units 6
4.3 Measurement Uncertainty & Decision Rule 6
4.4 Test Location 7
4.5 Test Facility 7
4.6 Deviation from Standards 7
4.7 Abnormalities from Standard Conditions 7
4.8 EMS Monitor 7

5 Equipment List 8

6 Emission Test Results 13

6.1 Conducted Emissions at Mains Terminals (9kHz-30MHz) 13
6.1.1 E.U.T. Operation 13
6.1.2 Test Mode Description 13
6.1.3 Test Setup Diagram 13
6.1.4 Measurement Procedure and Data 13
6.2 Radiated Emissions (30MHz-1GHz) 18
6.2.1 E.U.T. Operation 18
6.2.2 Test Mode Description 18
6.2.3 Test Setup Diagram 18
6.2.4 Measurement Procedure and Data 18
6.3 Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz) 0.6m loop 21
6.3.1 E.U.T. Operation 21
6.3.2 Test Mode Description 21
6.3.3 Test Setup Diagram 21
6.3.4 Measurement Procedure and Data 21
6.4 Harmonic Current Emission 24
6.5 Voltage Fluctuations and Flicker 25
6.5.1 E.U.T. Operation 25
6.5.2 Test Mode Description 25
6.5.3 Test Setup Diagram 25
6.5.4 Measurement Procedure and Data 25

7 Immunity Test Results 26

7.1 Electrostatic Discharge 27
7.1.1 Test Setup Diagram 27
7.1.2 E.U.T. Operation 27
7.1.3 Test Mode Description 27
7.1.4 Test Condition and Results: 28
7.2 Radiated Immunity (80MHz-1GHz) 29
7.2.1 Test Setup Diagram 29
7.2.2 E.U.T. Operation 29
7.2.3 Test Mode Description 29
7.2.4 Test Condition and Results: 29
7.3 Electrical Fast Transients Burst at AC Mains Power Port 30
7.3.1 Test Setup Diagram 30

7.3.2 E.U.T. Operation 30
7.3.3 Test Mode Description 30
7.3.4 Test Condition and Results: 30
7.4 Surge at Power Port 31
7.4.1 Test Setup Diagram 31
7.4.2 E.U.T. Operation 31
7.4.3 Test Mode Description 31
7.4.4 Test Condition and Results: 31
7.5 Conducted Immunity at AC Mains Power Port (150kHz-80MHz) 32
7.5.1 Test Setup Diagram 32
7.5.2 E.U.T. Operation 32
7.5.3 Test Mode Description 32
7.5.4 Test Condition and Results: 32
7.6 Voltage Dips and Interruptions 33
7.6.1 Test Setup Diagram 33
7.6.2 E.U.T. Operation 33
7.6.3 Test Mode Description 33
7.6.4 Test Condition and Results: 33

8 Test Setup Photo 34

9 EUT Constructional Details (EUT Photos) 39

4 General Information

4.1 Details of E.U.T.

Power supply:	For adapter: MLS-D31V3.6WG3DH-IP44 Input: 220-240V~ 50/60Hz Output: DC 31V 3.6W Test Voltage: 230V~ 50Hz Sample No.: SHEM2507005179LM-M1

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty & Decision Rule

Measurement Uncertainty:

No.	Item	Measurement Uncertainty (U_{Lab})	U_{CISPR}
1	Conducted Emission at mains port using AMN	3.4dB (9kHz to 150kHz)	3.8dB (9kHz to 150kHz)
		2.9dB (150kHz to 30MHz)	3.4dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	2.2dB (9kHz to 30MHz)	2.9dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	4.6dB (150kHz to 30MHz)	5.0dB (150kHz to 30MHz)
4	Radiated Power	3.4dB (30MHz to 300MHz)	4.5dB (30MHz to 300MHz)
5	Radiated emission	5.7dB (30MHz-1GHz)	6.3dB (30MHz-1GHz)
		4.8dB (1GHz-6GHz)	5.2dB (1GHz-6GHz)
		5.0dB (6GHz-18GHz)	5.5dB (6GHz-18GHz)
6	Radiated disturbance (disturbance current in a LLAS)	2.6dB (9kHz to 30MHz)	3.3dB (9kHz to 30MHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Decision Rule:

• CISPR 16-4-2 for emission measurements is as below described.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

U_{LAB} less than U_{CISPR}, therefore:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

4.4 Test Location

All tests were performed at:
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6332.01)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

• ISED (CAB Identifier: CN0020)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

• VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 EMS Monitor

Visual: Monitor the lamp lighting.

5 Equipment List

Conducted Emissions at Mains Terminals (9kHz-30MHz)					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2024/12/18	2025/12/17
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2024/12/18	2025/12/17
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2024/12/18	2025/12/17
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2024/12/18	2025/12/17
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023/12/19	2026/12/18
CE test Cable	/	9kHz-30MHz	SHEM172-2	2024/12/18	2025/12/17
Passive Voltage probe	Rohde & Schwarz	ESH2-Z3	SHEM028-2	2024/12/18	2025/12/17
Capacitive Voltage Probe	SCHWARZBECK	CVP9222 B	SHEM169-1	2025/07/30	2026/07/29
Current Probe	SCHWARZBECK	SW9605	SHEM170-1	2025/07/30	2026/07/29
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

Radiated Emissions (30MHz-1GHz)					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2024/12/18	2025/12/17
EMI test receiver	Rohde & Schwarz	ESR7	SHEM201-1	2025/07/30	2026/07/29
CONTROLLER	INNCO	CO2000	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM048-1	2023/09/03	2025/09/02
Broadband UHF-VHF ANTENNA	SCHWARZBECK	VULB9168	SHEM202-1	2025/04/12	2027/04/11
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
Pre-amplifier	HP	8447D	SHEM236-1	2024/12/18	2025/12/17
Pre-amplifier	HP	8447D	SHEM143-1	2024/12/18	2025/12/17
RE test Cable	/	/	SHEM217-2	2024/12/18	2025/12/17
Test Software	ESE	e3	Version: 6.191211	N/A	N/A
Semi/Fully Anechoic	TIANDE	9*6*6M	SHEM198-1	2024/05/06	2027/05/05

Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz) 0.6m loop					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
EMI test receiver	Rohde & Schwarz	ESU40	SHEM051-1	2024/12/18	2025/12/17
EMI test receiver	Rohde & Schwarz	ESR7	SHEM201-1	2025/07/30	2026/07/29
CONTROLLER	INNCO	CO2000	SHEM047-1	N/A	N/A
ANTENNA MAST	INNCO	MA400-EP	SHEM047-2	N/A	N/A
TURN DEVICE	INNCO	DE 3600-RH	SHEM047-3	N/A	N/A
Loop antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2024/12/18	2025/12/17
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
RE test Cable	/	/	SHEM217-2	2024/12/18	2025/12/17
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

Harmonic Current Emission					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2025/07/30	2026/07/29
AC Power Source 5KVA	AMETEK	5001iX	SHEM025-2	2025/07/30	2026/07/29
Test Software	AMETEK	CTS4	Version: 4.24.0	N/A	N/A
Harmonic&Flicker analyzer	EM TEST	DPA500	SHEM024-1	2025/07/30	2026/07/29
AC Power Source 6KVA	EM TEST	ACS500	SHEM025-1	2025/07/30	2026/07/29
Test Software	EM TEST	DPA	Version: 5.4.8.0	N/A	N/A
Harmonic & Flicker test system	DEWETRON	DEWE2-A4	SHEM274-1	2025/07/30	2026/07/29

Voltage Fluctuations and Flicker					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2025/07/30	2026/07/29
AC Power Source 5KVA	AMETEK	5001iX	SHEM025-2	2025/07/30	2026/07/29
Test Software	AMETEK	CTS4	Version: 4.24.0	N/A	N/A
Harmonic&Flicker analyzer	EM TEST	DPA500	SHEM024-1	2025/07/30	2026/07/29
AC Power Source 6KVA	EM TEST	ACS500	SHEM025-1	2025/07/30	2026/07/29
Test Software	EM TEST	DPA	Version: 5.4.8.0	N/A	N/A
Harmonic & Flicker test system	DEWETRON	DEWE2-A4	SHEM274-1	2025/07/30	2026/07/29

Electrostatic Discharge					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-2	2025/07/30	2026/07/29
Electrostatic Discharge Simulator	3CTEST	EDS20H	SHEM199-1	2024/12/18	2025/12/17
Electrostatic discharge simulator	EM TEST	dito	SHEM289-1	2025/02/10	2026/02/09

Radiated Immunity (80MHz-1GHz)					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Signal generator	Rohde & Schwarz	SMB100A	SHEM194-1	2024/12/18	2025/12/17
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2025/07/30	2026/07/29
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-4	2025/07/30	2026/07/29
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Antenna	SCHWARZBECK	STLP9149	SHEM131-1	N/A	N/A
Amplifier	MILMEGA	AS0840-55-55	SHEM133-1	2024/12/18	2025/12/17
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	2024/12/18	2025/12/17
Amplifier	Rohde & Schwarz	BBA150-E60	SHEM171-1	2024/12/18	2025/12/17
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2024/08/16	2025/08/15
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
Test Software	Rohde & Schwarz	EMC32	Version: 10.20.01	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-5	2024/12/18	2025/12/17

Electrical Fast Transients Burst at AC Mains Power Port					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2024/12/18	2025/12/17
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2025/07/30	2026/07/29
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2025/07/30	2026/07/29
EFT & Surge Generator	PRIMA	PRM61045TB	SHEM200-1	2024/09/27	2025/09/26
CDN for EFT & Surge	PRIMA	PRM-CDN	SHEM200-2	2024/09/27	2025/09/26

Surge at AC Mains Power Port					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2024/12/18	2025/12/17
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2025/07/30	2026/07/29
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2025/07/30	2026/07/29
EFT & Surge Generator	PRIMA	PRM61045TB	SHEM200-1	2025/07/30	2026/07/29
CDN for EFT & Surge	PRIMA	PRM-CDN	SHEM200-2	2025/07/30	2026/07/29
CDN for unsymmetrical interconnection lines (1.2/50us)	SCHAFFNER	CDN 117	SHEM224-5	2025/07/30	2026/07/29
CDN for symmetric datalines & Resistor network (Surge 1.2/50 or 10/700 us)	SCHAFFNER	CDN 118 & INA172	SHEM224-6 & SHEM224-7	2025/07/30	2026/07/29

Conducted Immunity at AC Mains Power Port (150kHz-80MHz)					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Signal generator	Rohde & Schwarz	SMB100A	SHEM194-1	2024/12/18	2025/12/17
Power Amplifier	HAEFFLY	PAMP250	SHEM023-1	2024/12/18	2025/12/17
6dB Attenuator	HUAXIANG	DTS50-6dB-1G-A	SHEM123-2	2024/12/18	2025/12/17
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2025/07/30	2026/07/29
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-4	2025/07/30	2026/07/29
Coupling and Decoupling Network (CDN)	LUTHI	L-801 M1	SHEM023-5	2024/12/18	2025/12/17
Coupling and Decoupling Network (CDN)	LUTHI	L-801 M2/M3	SHEM023-6	2024/12/18	2025/12/17
Shielding Room	ZHONGYU	5*3*3M	SHEM079-6	2022/12/20	2025/12/19
Coupling and Decoupling Network	Teseq	CDN M016	SHEM168-1	2025/07/30	2026/07/29
Test Software	Rohde & Schwarz	EMC32	Version: 10.20.01	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-5	2024/12/18	2025/12/17
Current Injection Probe	PRANA	IP-DR250	SHEM273-1	2024/12/18	2025/12/17
Test System for Conducted Immunity	TESEQ	NSG 4070	SHEM295-1	2024/12/18	2025/12/17

Voltage Dips and Interruptions					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2024/12/18	2025/12/17
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2025/07/30	2026/07/29
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2025/07/30	2026/07/29
Manual step transformer	TESEQ	INA 6501	SHEM224-4	2025/07/30	2026/07/29

General used equipment					
Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal Date**	**Cal Due Date**
Atmospheric Pressure Meter	Nanjing XiangRuiDe	DYM3	SHEM082-2	2024/01/18	2027/01/17
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-9~10	2024/12/22	2025/12/21
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-5	2025/07/09	2026/07/08
Digital Temperature& humidity recorder	Jianda Renke	RS-WS-N01-6J	SHEM247-1~8	2025/01/06	2026/01/05
Digital Multimeter	FLUKE	17B+	SHEM271-7	2025/07/07	2026/07/06
AC Power Supply	APC	KDF-31020T-V0-F0-IO	SHEM216-1	2024/12/18	2025/12/17
DC Power Supply	HP	6010A	SHEM222-1	2024/12/18	2025/12/17
Multi-purpose tong tester	FLUKE	317	SHEM001-2	2024/10/30	2025/10/29

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (9kHz-30MHz)

Test Requirement: EN IEC 55015: 2019+A11:2020

Test Method: CISPR 16-2-1: 2014+A1:2017

Limit:

0.009MHz – 0.05MHz	110dB(μV) quasi-peak
0.05MHz – 0.15MHz	90dB(μV)-80dB(μV) quasi-peak
0.15MHz – 0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average
0.5MHz – 5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5MHz – 30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (200Hz resolution bandwidth) 0.009M to 0.15MHz
	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

6.1.3 Test Setup Diagram

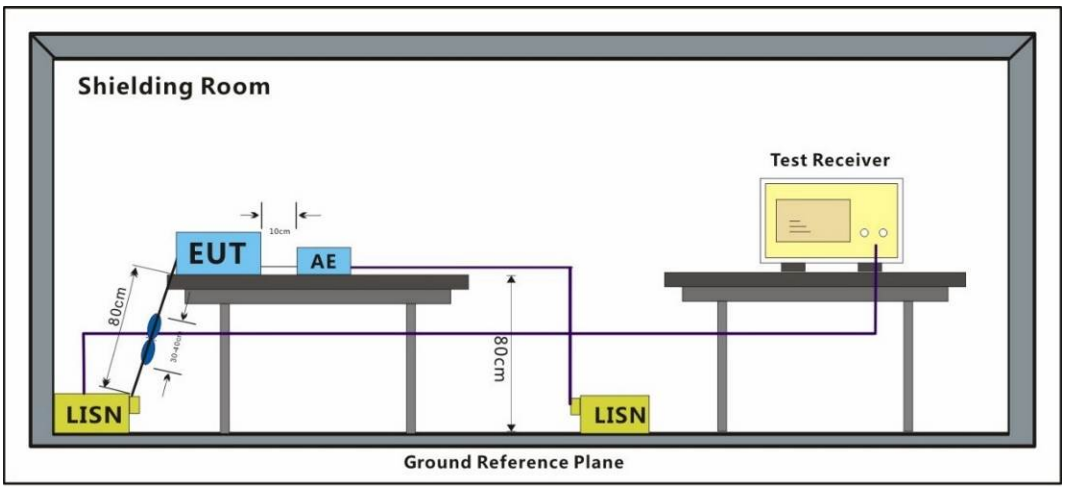


6.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector.Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

The red line show in graphic is the limit in standard used in this section.

Remark: Level= Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line

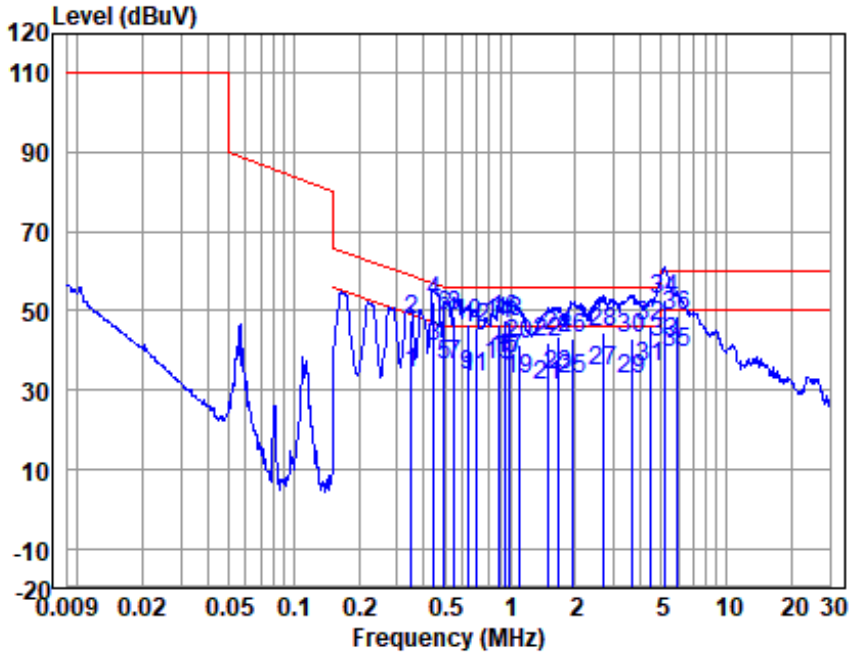

LISN : LINE
EUT/Project No :
Test Mode : 00

	Freq	Read level	LISN Factor	Cable Loss	Emission Level	Limit	Over Limit	Remark
	(MHz)	(dBuV)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.35	24.18	0.38	9.90	34.46	49.00	-14.54	Average
2	0.35	37.64	0.38	9.90	47.92	59.00	-11.08	QP
3	0.44	30.82	0.33	9.90	41.05	47.02	-5.97	Average
4	0.44	41.99	0.33	9.90	52.22	57.02	-4.80	QP
5	0.50	25.87	0.30	9.90	36.07	46.05	-9.98	Average
6	0.50	38.32	0.30	9.90	48.52	56.05	-7.53	QP
7	0.55	25.93	0.30	9.90	36.13	46.00	-9.87	Average
8	0.55	38.30	0.30	9.90	48.50	56.00	-7.50	QP
9	0.64	23.59	0.30	9.90	33.79	46.00	-12.21	Average
10	0.64	36.33	0.30	9.90	46.53	56.00	-9.47	QP
11	0.69	23.19	0.30	9.90	33.39	46.00	-12.61	Average
12	0.69	35.21	0.30	9.90	45.41	56.00	-10.59	QP


Notes: Emission Level = Read Level +LISN Factor + Cable loss

Test Mode: 00; Line: Live line

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
13	0.88	26.18	0.30	9.90	36.38	46.00	-9.62	Average
14	0.88	36.52	0.30	9.90	46.72	56.00	-9.28	QP
15	0.94	27.40	0.30	9.90	37.60	46.00	-8.40	Average
16	0.94	37.41	0.30	9.90	47.61	56.00	-8.39	QP
17	0.99	27.74	0.30	9.90	37.94	46.00	-8.06	Average
18	0.99	37.02	0.30	9.90	47.22	56.00	-8.78	QP
19	1.10	22.36	0.30	9.90	32.56	46.00	-13.44	Average
20	1.10	31.11	0.30	9.90	41.31	56.00	-14.69	QP
21	1.50	20.80	0.30	9.90	31.00	46.00	-15.00	Average
22	1.50	32.04	0.30	9.90	42.24	56.00	-13.76	QP
23	1.65	23.55	0.30	9.90	33.75	46.00	-12.25	Average
24	1.65	33.43	0.30	9.90	43.63	56.00	-12.37	QP
25	1.96	22.44	0.30	9.90	32.64	46.00	-13.36	Average
26	1.96	32.93	0.30	9.90	43.13	56.00	-12.87	QP
27	2.69	24.57	0.30	9.90	34.77	46.00	-11.23	Average
28	2.69	34.43	0.30	9.90	44.63	56.00	-11.37	QP
29	3.62	22.71	0.30	9.90	32.91	46.00	-13.09	Average
30	3.62	32.72	0.30	9.90	42.92	56.00	-13.08	QP
31	4.48	25.66	0.30	9.90	35.86	46.00	-10.14	Average
32	4.48	35.74	0.30	9.90	45.94	56.00	-10.06	QP
33	5.14	31.66	0.31	9.90	41.87	50.00	-8.13	Average
34	5.14	42.85	0.31	9.90	53.06	60.00	-6.94	QP
35	5.87	29.05	0.35	9.90	39.30	50.00	-10.70	Average
36	5.87	38.55	0.35	9.90	48.80	60.00	-11.20	QP

Notes: Emission Level = Read Level +LISN Factor + Cable loss

Test Mode: 00; Line: Neutral Line

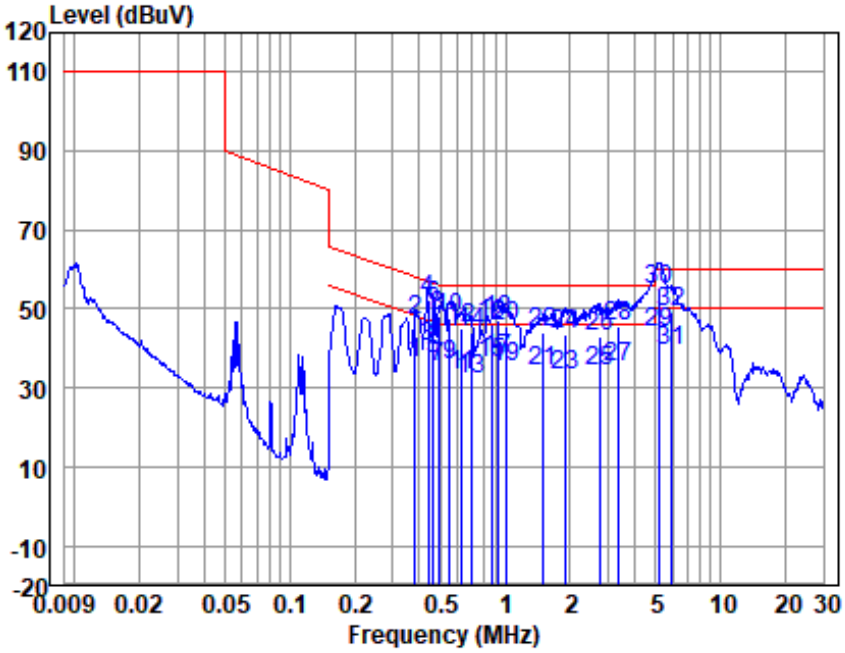

LISN : NEUTRAL
EUT/Project No :
Test Mode : 00

	Freq	Read level	LISN Factor	Cable Loss	Emission Level	Limit	Over Limit	Remark
	(MHz)	(dBuV)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.38	26.14	0.40	9.90	36.44	48.25	-11.81	Average
2	0.38	37.07	0.40	9.90	47.37	58.25	-10.88	QP
3	0.44	30.20	0.40	9.90	40.50	47.11	-6.61	Average
4	0.44	42.24	0.40	9.90	52.54	57.11	-4.57	QP
5	0.46	27.16	0.40	9.90	37.46	46.67	-9.21	Average
6	0.46	40.22	0.40	9.90	50.52	56.67	-6.15	QP
7	0.49	24.75	0.40	9.90	35.05	46.14	-11.09	Average
8	0.49	37.85	0.40	9.90	48.15	56.14	-7.99	QP
9	0.55	25.45	0.37	9.90	35.72	46.00	-10.28	Average
10	0.55	37.42	0.37	9.90	47.69	56.00	-8.31	QP
11	0.63	22.92	0.33	9.90	33.15	46.00	-12.85	Average
12	0.63	34.71	0.33	9.90	44.94	56.00	-11.06	QP

Notes: Emission Level = Read Level +LISN Factor + Cable loss

Test Mode: 00; Line: Neutral Line

	Freq	Read level	LISN Factor	Cable Loss	Emission Level	Limit	Over Limit	Remark
	(MHz)	(dBuV)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)	
13	0.69	21.85	0.30	9.90	32.05	46.00	-13.95	Average
14	0.69	33.83	0.30	9.90	44.03	56.00	-11.97	QP
15	0.88	25.86	0.30	9.90	36.06	46.00	-9.94	Average
16	0.88	36.07	0.30	9.90	46.27	56.00	-9.73	QP
17	0.93	26.95	0.30	9.90	37.15	46.00	-8.85	Average
18	0.93	36.73	0.30	9.90	46.93	56.00	-9.07	QP
19	1.02	25.15	0.30	9.90	35.35	46.00	-10.65	Average
20	1.02	35.27	0.30	9.90	45.47	56.00	-10.53	QP
21	1.49	23.89	0.30	9.90	34.09	46.00	-11.91	Average
22	1.49	33.80	0.30	9.90	44.00	56.00	-12.00	QP
23	1.89	22.79	0.30	9.90	32.99	46.00	-13.01	Average
24	1.89	33.59	0.30	9.90	43.79	56.00	-12.21	QP
25	2.74	24.10	0.37	9.90	34.37	46.00	-11.63	Average
26	2.74	32.89	0.37	9.90	43.16	56.00	-12.84	QP
27	3.36	25.19	0.41	9.90	35.50	46.00	-10.50	Average
28	3.36	35.24	0.41	9.90	45.55	56.00	-10.45	QP
29	5.17	33.51	0.49	9.90	43.90	50.00	-6.10	Average
30	5.17	44.33	0.49	9.90	54.72	60.00	-5.28	QP
31	5.87	29.24	0.45	9.90	39.59	50.00	-10.41	Average
32	5.87	38.87	0.45	9.90	49.22	60.00	-10.78	QP

Notes: Emission Level = Read Level +LISN Factor + Cable loss

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: EN IEC 55015: 2019+A11:2020
Test Method: CISPR 16-2-3: 2016 +A1:2019 +A2:2023
Measurement Distance: 3m

Limit:

Test Distance:	3m
30MHz-230MHz	40 dB(μV/m) quasi-peak
230MHz-1GHz	47 dB(μV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz

Test Distance:	10m
30MHz-230MHz	30 dB(μV/m) quasi-peak
230MHz-1GHz	37 dB(μV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz


6.2.1 E.U.T. Operation

Operating Environment:
Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

6.2.3 Test Setup Diagram

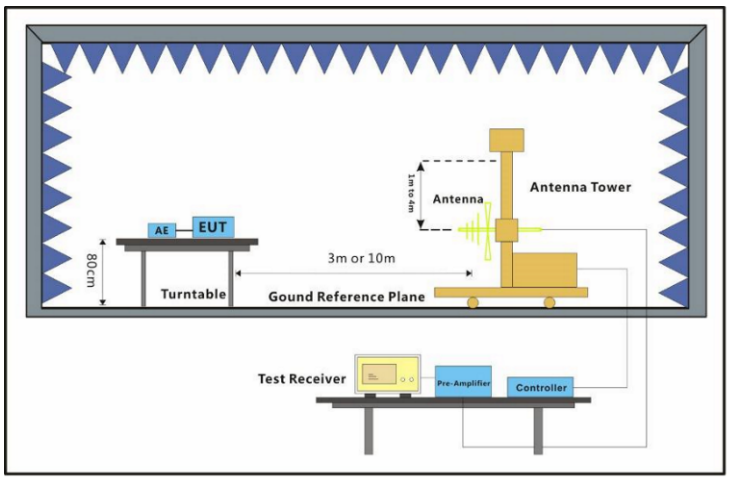


6.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

The red line show in graphic is the limit in standard used in this section.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 00; Polarity: Horizontal

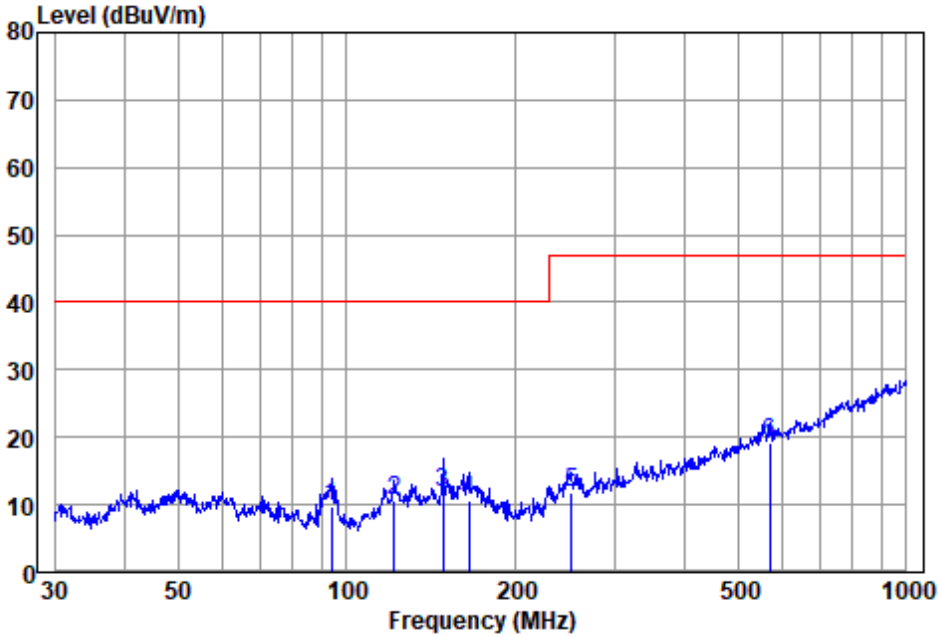


Antenna Polarity :HORIZONTAL
EUT/Project :5179LM
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	93.768	32.95	8.10	1.94	33.20	9.79	40.00	-30.21	QP
2	121.549	30.19	11.15	2.26	33.10	10.50	40.00	-29.50	QP
3	148.441	28.78	13.65	2.52	33.00	11.95	40.00	-28.05	QP
4	164.908	27.90	13.20	2.66	33.00	10.76	40.00	-29.24	QP
5	252.063	29.64	11.75	3.30	32.81	11.88	47.00	-35.12	QP
6	568.613	27.58	19.18	5.14	32.74	19.16	47.00	-27.84	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

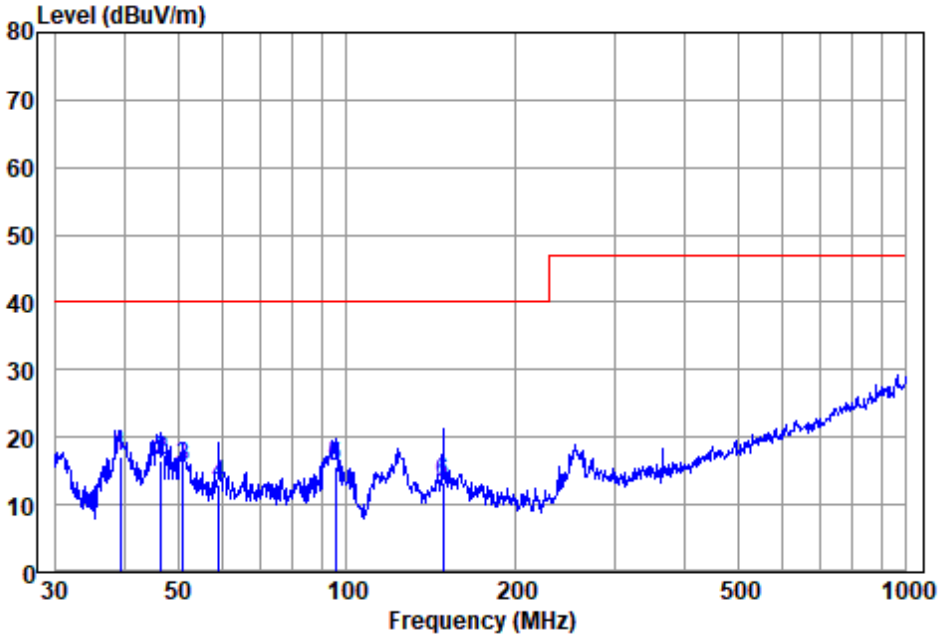

Antenna Polarity :VERTICAL
EUT/Project :5179LM
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	39.299	35.55	13.40	1.26	33.20	17.01	40.00	-22.99	QP
2	46.666	34.53	13.87	1.36	33.20	16.56	40.00	-23.44	QP
3	50.942	33.64	13.90	1.42	33.20	15.76	40.00	-24.24	QP
4	59.025	31.62	13.10	1.54	33.20	13.06	40.00	-26.94	QP
5	95.427	38.62	8.27	1.96	33.20	15.65	40.00	-24.35	QP
6	148.441	30.01	13.65	2.52	33.00	13.18	40.00	-26.82	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

6.3 Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz) 0.6m loop

Test Requirement: EN IEC 55015: 2019+A11:2020
Test Method: CISPR 16-2-3: 2016 +A1:2019 +A2:2023

Limit:

0.009MHz-0.07MHz	69dB(μA/m) quasi-peak
0.07MHz-0.15MHz	69dB(μA/m)-39dB(μA/m) quasi-peak
0.15MHz-4MHz	39dB(μA/m)-3dB(μA/m) quasi-peak
4MHz-30MHz	3dB(μA/m) quasi-peak
Detector:	Peak for pre-scan (200Hz resolution bandwidth) 0.009M to 0.15MHz
	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz


6.3.1 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.


6.3.3 Test Setup Diagram

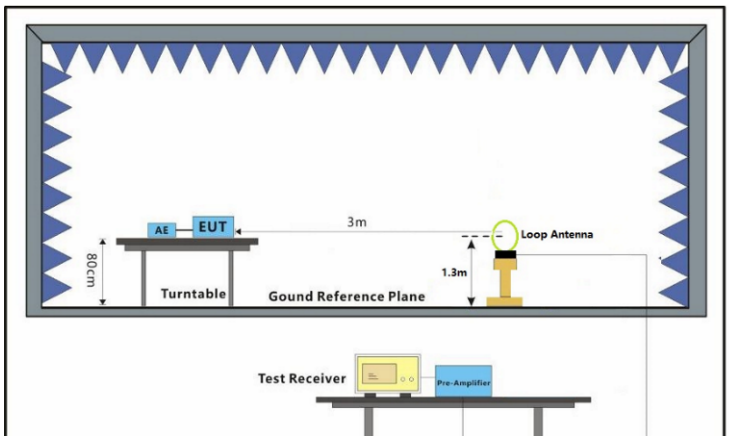

6.3.4 Measurement Procedure and Data

Frequency range: 9kHz-30MHz
The red line show in graphic is the limit in standard used in this section.
Measured Level= Read Level + Cable Loss + Antenna Factor(if applicable)

Test Mode: 00; Polarity: Vertical

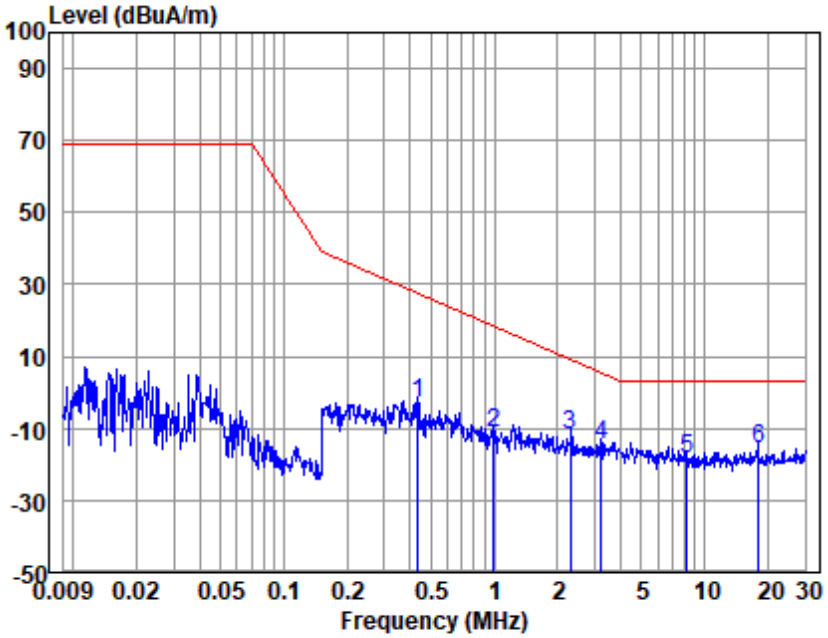


Antenna Polarity :VERTICAL COAXIAL
EUT/Project :5179LM
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuA/uVm	dB	dBuA/m	dBuA/m	dB	
1	0.435	30.68	-34.20	0.30	-3.22	27.33	-30.55	QP
2	0.994	22.57	-33.91	0.30	-11.04	18.26	-29.30	QP
3	2.311	21.67	-33.76	0.30	-11.79	9.01	-20.80	QP
4	3.224	18.67	-33.67	0.30	-14.70	5.37	-20.07	QP
5	8.193	14.79	-33.42	0.30	-18.33	3.00	-21.33	QP
6	17.996	16.86	-33.00	0.35	-15.79	3.00	-18.79	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss

Test Mode: 00; Polarity: Vertical

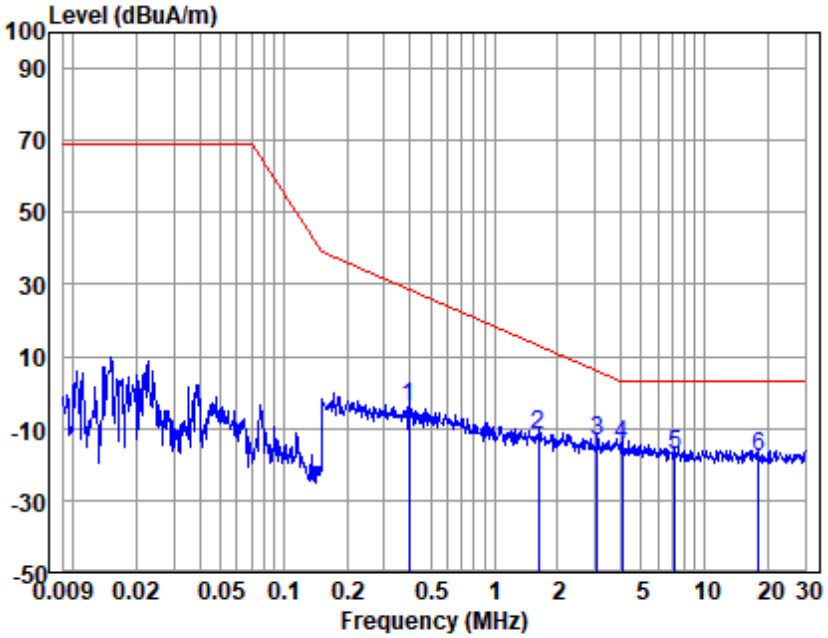

Antenna Polarity :VERTICAL COPLANAR
EUT/Project :5179LM
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuA/uVm	dB	dBuA/m	dBuA/m	dB	
1	0.394	29.85	-34.20	0.30	-4.05	28.40	-32.45	QP
2	1.618	21.55	-33.83	0.30	-11.98	12.93	-24.91	QP
3	3.095	19.69	-33.69	0.30	-13.70	5.81	-19.51	QP
4	4.045	18.92	-33.60	0.30	-14.38	3.00	-17.38	QP
5	7.196	15.74	-33.40	0.30	-17.36	3.00	-20.36	QP
6	18.143	14.69	-33.00	0.35	-17.96	3.00	-20.96	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss

6.4 Harmonic Current Emission

Test Requirement: EN IEC 61000-3-2: 2019 +A1:2021 +A2:2024

Test Method: EN IEC 61000-3-2: 2019 +A1:2021 +A2:2024

There is no requirement for lighting equipment with a rated power less than but not equal to 5 W, for details please refer to clause 7.1 of EN IEC 61000-3-2:2019+A1:2021+A2:2024.

For the following categories of equipment, limits are not specified in this document:

- lighting equipment with a rated power less than but not equal to 5 W

6.5 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3: 2013 +A1:2019 +A2:2021

Test Method: EN 61000-3-3: 2013 +A1:2019 +A2:2021

6.5.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

6.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

6.5.3 Test Setup Diagram

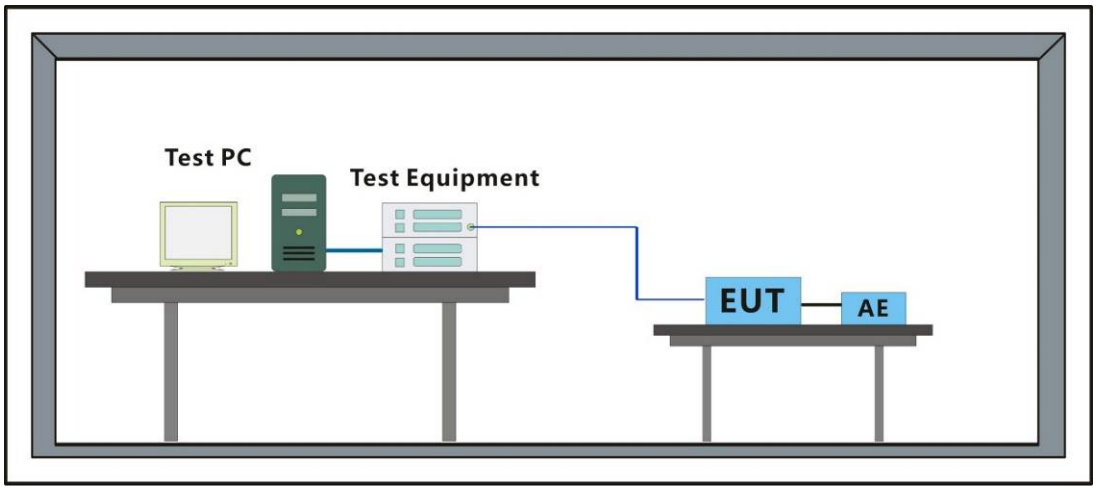

6.5.4 Measurement Procedure and Data

Test Mode: 00

Vrms at the end of test (Volt):	230.11			
T-max (mS):	0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass

7 Immunity Test Results

Performance Criteria Description in EN IEC 61547

Criterion A: During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.


Criterion B: During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Criterion C: During and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.

7.1 Electrostatic Discharge

Test Requirement: EN IEC 61547: 2023
Test Method: EN 61000-4-2:2009

7.1.1 Test Setup Diagram

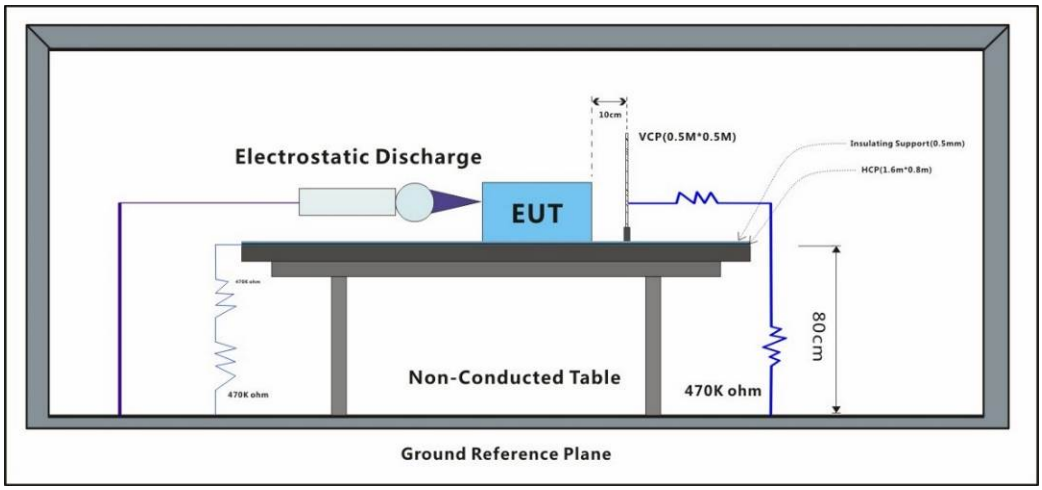

7.1.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.1.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

7.1.4 Test Condition and Results:

Performance Criterion: B for other than Road and street lighting equipment;

Performance Criterion: C for Road and street lighting equipment.

Discharge Impedance: 330 Ω / 150 pF

Discharge Voltage: Air Discharge: ±2,4,8 kV; Contact Discharge:±4 kV; VCP/HCP: ±4 kV for other than Road and street lighting equipment;

Air Discharge: ±2,4,8,15 kV; Contact Discharge:±4,8 kV; VCP/HCP: ±4,8 kV for Road and street lighting equipment.

Polarity: Positive & Negative

Number of Discharge: Minimum 10 times at each test point

Discharge Mode: Single Discharge

Discharge Period: 1 second minimum

Test Point 1: All insulated enclosure & seams.

Test Point 2: All accessible metal parts of the enclosure.


Test Point 3: All sides.

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A
A: No degradation in the performance of the EUT was observed				

7.2 Radiated Immunity (80MHz-1GHz)

Test Requirement: EN IEC 61547: 2023
Test Method: EN IEC 61000-4-3:2020

7.2.1 Test Setup Diagram

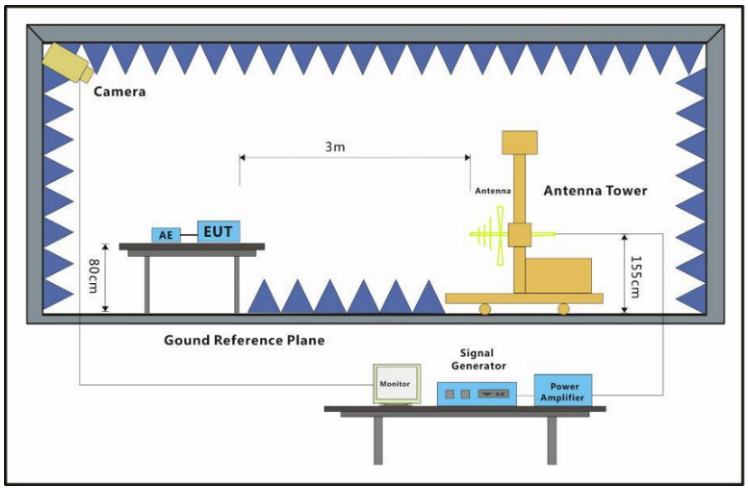

7.2.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.2.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

7.2.4 Test Condition and Results:


Performance Criterion:A
Frequency Range:80MHz to 1GHz
Test Distance:3m
Antenna Polarisation:Vertical and Horizontal
Modulation1kHz,80% Amp. Mod,1% increment

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	3s	A
80MHz-1GHz	3	Back	3s	A
80MHz-1GHz	3	Left	3s	A
80MHz-1GHz	3	Right	3s	A
A: No degradation in the performance of the EUT was observed				

7.3 Electrical Fast Transients Burst at AC Mains Power Port

Test Requirement: EN IEC 61547: 2023
Test Method: EN 61000-4-4:2012

7.3.1 Test Setup Diagram

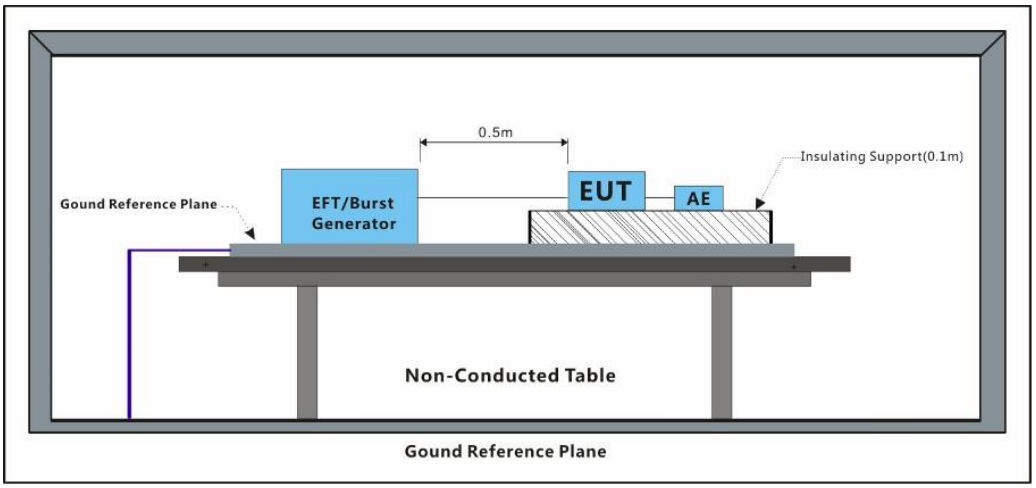

7.3.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.3.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

7.3.4 Test Condition and Results:


Performance Criterion:B
Repetition Frequency:5kHz
Burst Period:300ms
Test Duration:2 minute per level & polarity
Test Level:1.0kV
Polarity:Positive & Negative

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A
A: No degradation in the performance of the EUT was observed				

7.4 Surge at Power Port

Test Requirement: EN IEC 61547: 2023
Test Method: EN 61000-4-5:2014+A1:2017

7.4.1 Test Setup Diagram

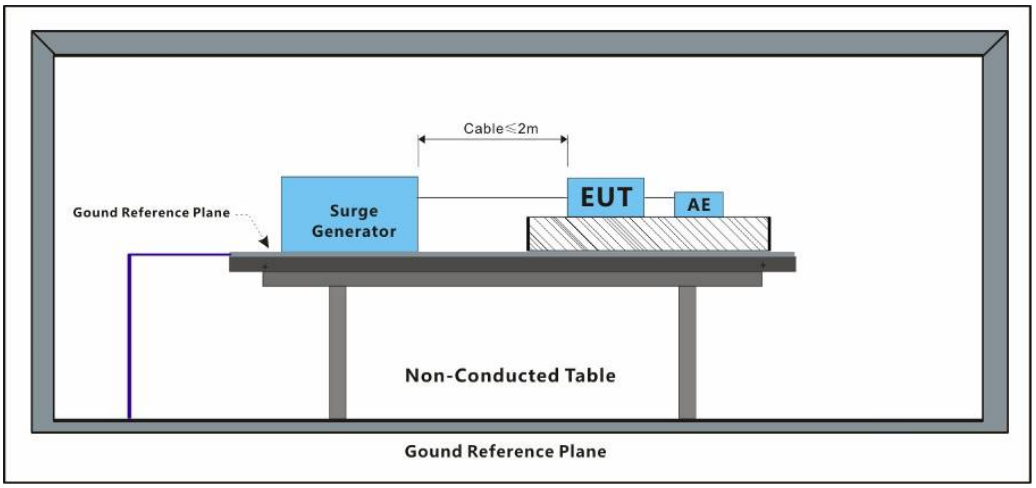

7.4.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.4.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

7.4.4 Test Condition and Results:

Performance Criterion: B (Luminaire for emergency lighting),
Performance Criterion: C (for others lighting equipment).
Interval: 60s between each surge
Test Level: ±0.5kVLive to Neutral for Self-ballasted lamps <=25W;
±1kV,±2kV Live to Neutral; ±2kV, ±4kV Live, Neutral to Earth for Road and street lighting equipment;
±1kV Live to Neutral; ±2kV Live, Neutral to Earth for others lighting equipment.
Polarity: Positive & Negative
Generator source impedance: 2Ω
CDN coupling impedance(Line-to-ground):10Ω
Trigger Mode: Internal
No. of surges: 5 positive at 90°, 5 negative at 270°.


Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1.0	+	90°	A
L-N	1.0	-	270°	A
A: No degradation in the performance of the EUT was observed				

7.5 Conducted Immunity at AC Mains Power Port (150kHz-80MHz)

Test Requirement: EN IEC 61547: 2023

Test Method: EN 61000-4-6:2014

7.5.1 Test Setup Diagram

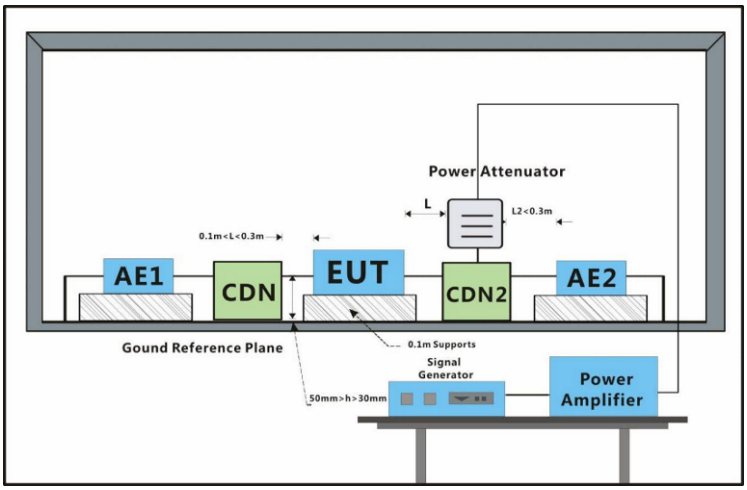

7.5.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.5.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

7.5.4 Test Condition and Results:

Performance Criterion:A

Step Size 1%

Frequency Range:0.15MHz to 80MHz


Modulation:80%, 1kHz Amplitude Modulation

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	3s	A
A: No degradation in the performance of the EUT was observed				

7.6 Voltage Dips and Interruptions

Test Requirement: EN IEC 61547: 2023
Test Method: EN IEC 61000-4-11:2020

7.6.1 Test Setup Diagram

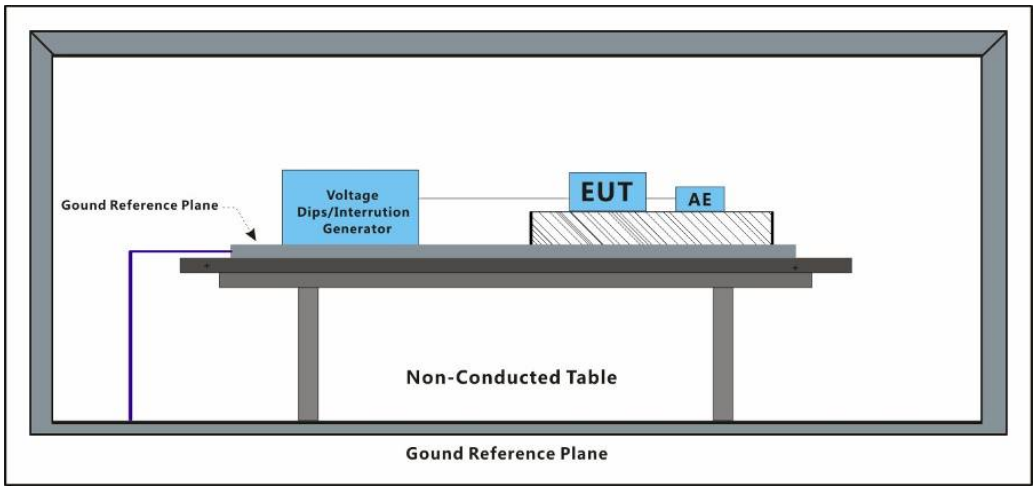

7.6.2 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.6.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep the lamp lighting continuously.

7.6.4 Test Condition and Results:

Performance Criterion:0% of UT (Rated Voltage) for 0.5 Cycle: B; 70% of UT for 10 Cycles: B.
No. of Dips / Interruptions:3 per Level
Time between dropout10s

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycle	3	A
0	180°	0.5 Cycle	3	A
70	0°	10 Cycles	3	A
70	180°	10 Cycles	3	A
A: No degradation in the performance of the EUT was observed				

8 Test Setup Photo

Conducted Emissions at Mains Terminals (9kHz-30MHz)



Radiated Emissions (Magnetic Field Induced Current)(9kHz-30MHz)
0.6m loop



Voltage Fluctuations and Flicker



Electrostatic Discharge



Radiated Immunity (80MHz-1GHz)



Electrical Fast Transients Burst at AC Mains Power Port



Surge at Power Port



Conducted Immunity at AC Mains Power Port (150kHz-80MHz)




Voltage Dips and Interruptions



9 EUT Constructional Details (EUT Photos)



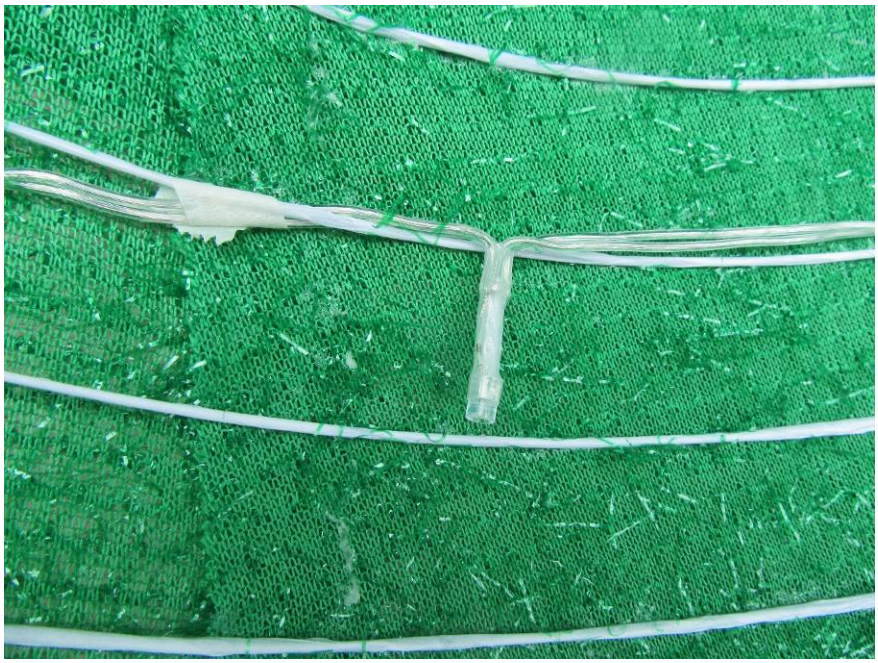


All below appearance is made by above test sample and they were declared by the applicant.

			
G61000539	G61000256	G61000287	G61000414
			
G61000268	G61000276	G61000192	G57000342
			
G61000275	G61000269	G61000272	G61000279
			
G61000544	G61000545	G61000537	G61000546
			
G61000280	G61000445	G61000538	G61000019, G57000339

			
G61000020, G57000340	G61000022, G57000341	G61000274	G61000281
			
G61000190	G61000072	G57000351, G61000191	G61000278
			
G61000277	G61000442	G61000447	G61000448
			
G61000443	G61000446	G61000413	G61000024
			
G61000273	G61000288	G61000283	G61000284
			
G61000548	G61000578	G61000534	G61000535

			
G61000270	G61000286	G61000282	G61000540
			
G61000541	G61000542	G61000285	G61000536
			
G61000444	G61000266	G61000049	G61000025
			
G61000084	G61000075	G57000348	G61000260
			
G61000261	G61000262	G61000550	G61000547
			
G61000549	G61000083	G61000085	G61000450

			
G61000449	G57000350	G57000349	G61000073
			
G61000417	G61000487	G61000429	G61000489
			
G61000265	G61000264	G61000263	G61000543
			
G61000082			

			
G61000550	G61000547	G61000887	G61000886
			
G61000892	G61000900	G61000890	G61000891
			
G61001007	G61000888	G61000889	G61001008
			
G61001009	G61001010	G61000998	G61000997
			
G61000999	G61001006		

- End of the Report -