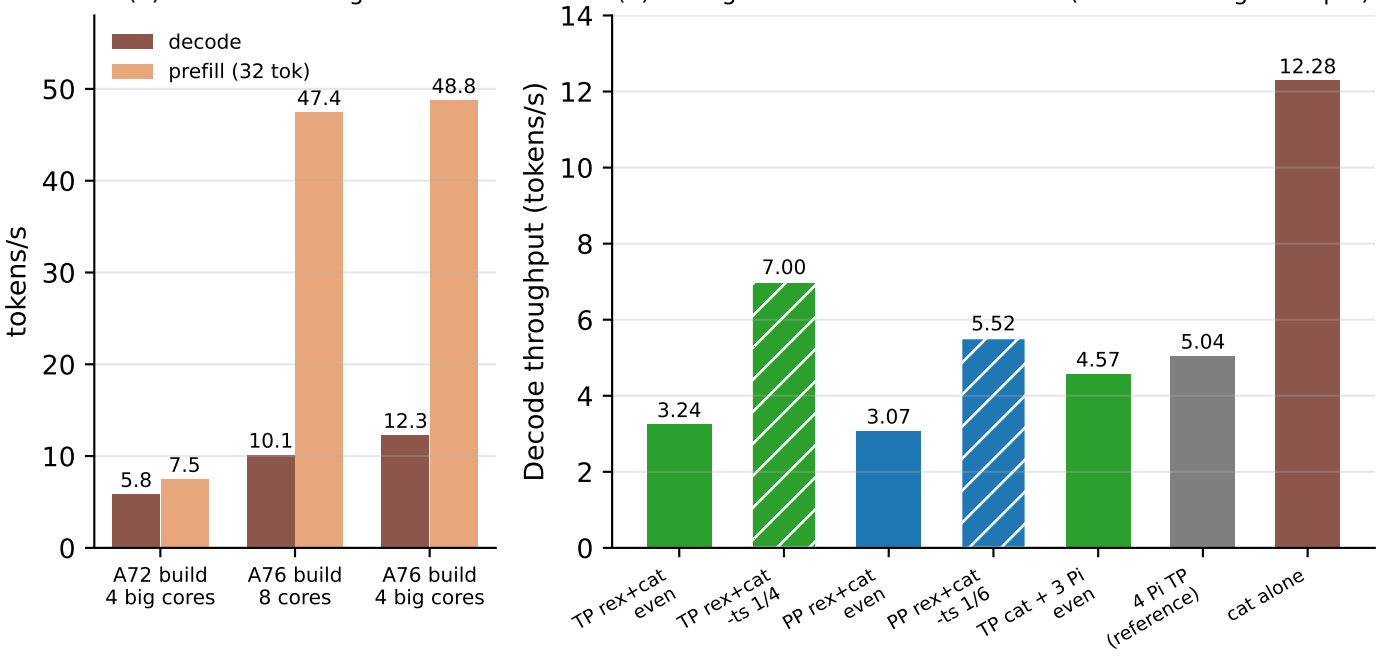
(a) LubanCat-5 single board
decode
prefill (32 tok)
tokens/s
0
10
20
30
40
50
5.8
7.5
10.1
47.4
12.3
48.8
A72 build
4 big cores
A76 build
8 cores
A76 build
4 big cores
(b) Mixing the RK3588 board with Pis (hatched: weighted split)
Decode throughput (tokens/s)
0
2
4
6
8
10
12
14
3.24
7.00
3.07
5.52
4.57
5.04
12.28
TP rex+cat
even
TP rex+cat
-ts 1/4
PP rex+cat
even
PP rex+cat
-ts 1/6
TP cat + 3 Pi
even
4 Pi TP
(reference)
cat alone