Stackup for 4, 6, 8,..., 18 layers Multi-layer laminated structure

Instant Quote & Order Online

PCB Capabilities

PCB Capabilities
Advanced PCB Capabilities
Multi-layer laminated structure
Quick turn PCB Fabrication
PCB Prototyping
Low-volume Production
Production Process
PCB Products
FAQ of PCB

PCBA Capabilities

PCB Assembly Capability
Special Reminders
File Requirements
PCB Assembly FAQ
Production Process
PCB Assembly Products

Contact Us!
Our customer service ready for your PCB
+86-571-85317532

Irop

4+6+4 HDI stackup Layer buildup/stackup reference

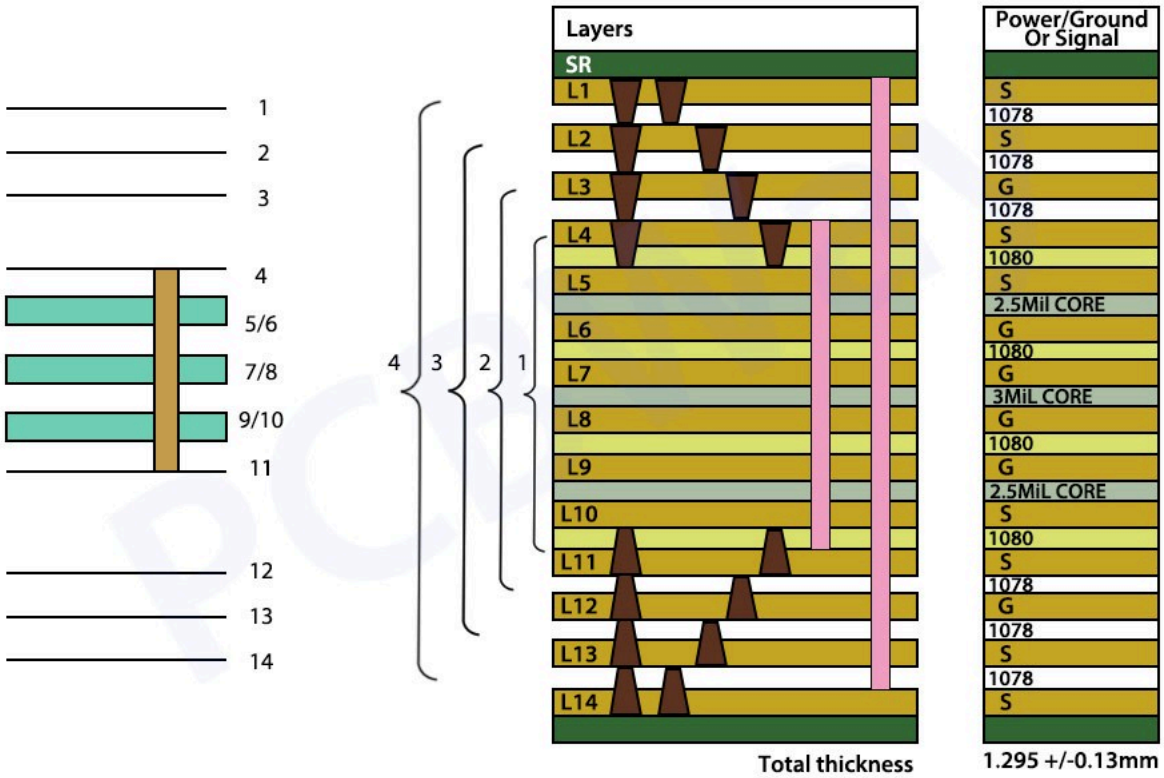

In the layer structure of a PCB board, there are several important concepts.
PP (Prepreg): Prepreg is a semi-cured sheet, also known as prepreg material, a thin sheet material that impregnated with resin and cured to an intermediate degree. It is mainly used as the bonding material and insulation material for inner conductive patterns of multilayer printed circuit boards. After being laminated with Prepreg, the semi-cured epoxy resin is squeezed out, begins to flow, and solidifies, bonding the multilayer circuit boards together and forming a reliable insulating layer. In the PCB industry, Prepreg can be likened to glue, used to bond several cores together using the lamination method to create multilayer boards.
PP Type:1080(3.1mil), 3313(4.2mil), 2116(5.4mil), 7628(7.7mil).

Core: Core is a rigid material with specific thickness and copper on both sides.
The pressing materials for multilayer boards mainly consist of Prepreg and Core.

The differences between the two are:
- Prepreg is a material used in PCBs, with a semi-solid texture similar to cardboard, while core is a rigid material similar to copper.
- Prepreg functions as both an adhesive and insulator, whereas core serves as the foundational material for PCBs, with entirely different functional roles.
- Prepreg can be flexible, while core cannot be bent.
- Prepreg is non-conductive, whereas core has copper layers on both sides, serving as the conductive medium for the printed circuit board.

In other special cases or Advanced PCBs (you need to choose "Customized Services and Advanced Options" and Custom stackup or Impedance control):

Замовляв виготовлення друкованої плати в PCBWay і залишився повністю задоволений результатом. Якість плати бездоганна: чітка геометрія доріжок, ідеальна паяльна маска, точні отвори та відмінна шовкографія. Усі…

Engineer

HEAT

I just wanted to reach out and say that the quality of this assembly batch is excellent AGAIN. I am especially happy to see that the specific soldering instruction I left for one of the components was followed perfectly. The execution was incredible. Also, the…

Yordanov

1. If you need custom stackup or control impedance, we will manufacture according to your requirement.
2. After place order,we will calculate whether it meets the requirements based on the stackup , material and impedance information.Also we will confirm with you.

For flexible PCB stackup, please check "Stack-up for FPC".

For rigid PCB, in response to customer demand, PCBWay has added a variety of laminate structures to our products **(currently, we have added 298 and will continue to update them)**, which can greatly satisfy product structural design and impedance requirements.

PCB standard stackup

Total: 298

Layers	Thickness (MM)	Inner Copper (OZ)	Outer Copper (OZ)	Inner layer Residual copper ratio (%)
Please Select	Please Select	Please Select	Please Select	Please Select

Search Reset

Friendly Reminder: This is a through-hole board stack-up, not applicable for blind and buried vias. PCBWay supports customers to customize structures, and will continue to increase the structure diagrams.

4 Layers

Total: 112

View all

1 **4-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1855
L2-CU	Inner Copper 1OZ	0.0350	1.1 (Core with Cu)
CORE	Core DK:4.6	1.0300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1855
L4-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.51mm, tolerance: ±10%
* Finished PCB Thickness: 1.61mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 **4-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1785
L2-CU	Inner Copper 1OZ	0.0350	1.1 (Core with Cu)
CORE	Core DK:4.6	1.0300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1785
L4-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.49mm, tolerance: ±10%
* Finished PCB Thickness: 1.59mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

3 **4-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1715
L2-CU	Inner Copper 1OZ	0.0350	1.1 (Core with Cu)
CORE	Core DK:4.6	1.0300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1715
L4-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.48mm, tolerance: ±10%
* Finished PCB Thickness: 1.58mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

4 **4-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **2OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1855
L2-CU	Inner Copper 1OZ	0.0350	1.0 (Core with Cu)
CORE	Core DK:4.6	0.9300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1855
L4-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)

* Thickness after lamination: 1.48mm, tolerance: ±10%
* Finished PCB Thickness: 1.58mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

5 **4-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **2OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1785
L2-CU	Inner Copper 1OZ	0.0350	1.0 (Core with Cu)
CORE	Core DK:4.6	0.9300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1785
L4-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)

* Thickness after lamination: 1.46mm, tolerance: ±10%
* Finished PCB Thickness: 1.56mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

6 **4-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **2OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1715
L2-CU	Inner Copper 1OZ	0.0350	1.0 (Core with Cu)
CORE	Core DK:4.6	0.9300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1715
L4-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)

* Thickness after lamination: 1.45mm, tolerance: ±10%
* Finished PCB Thickness: 1.55mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

SHOW MORE

6 Layers Total: 74

View all

1 **6-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1750
L4-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L6-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.45mm, tolerance: ±10%
* Finished PCB Thickness: 1.55mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 **6-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1785
L2-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L4-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1785
L6-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.55mm, tolerance: ±10%
* Finished PCB Thickness: 1.65mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

3 **6-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **2OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L6-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)

* Thickness after lamination: 1.45mm, tolerance: ±10%
* Finished PCB Thickness: 1.55mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

4 **6-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **2OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1125
L2-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.2250
PP	2116 RC58% DK:4.45	0.1300	
L4-CU	Inner Copper 1OZ	0.0350	0.5 (Core with Cu)
CORE	Core DK:4.6	0.4300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L6-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)

* Thickness after lamination: 1.56mm, tolerance: ±10%
* Finished PCB Thickness: 1.66mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

5 **6-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0925
L2-CU	Inner Copper 1OZ	0.0350	1.0 (Core with Cu)
CORE	Core DK:4.6	0.9300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L4-CU	Inner Copper 1OZ	0.0350	1.0 (Core with Cu)
CORE	Core DK:4.6	0.9300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0925
L6-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.3mm, tolerance: ±10%
* Finished PCB Thickness: 2.40mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

6 **6-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1785
L2-CU	Inner Copper 1OZ	0.0350	0.9 (Core with Cu)
CORE	Core DK:4.6	0.8300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L4-CU	Inner Copper 1OZ	0.0350	0.9 (Core with Cu)
CORE	Core DK:4.6	0.8300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1785
L6-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.35mm, tolerance: ±10%
* Finished PCB Thickness: 2.45mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

SHOW MORE

8 Layers Total: 49

View all

1 8-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1750
L4-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1750
L6-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L8-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.52mm, tolerance: ±10%
* Finished PCB Thickness: 1.62mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 8-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1125
L2-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L4-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L6-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L8-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.48mm, tolerance: ±10%
* Finished PCB Thickness: 1.58mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

3 8-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **2OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L8-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)

* Thickness after lamination: 1.46mm, tolerance: ±10%
* Finished PCB Thickness: 1.56mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

4 **8-layers PCB** Regular

Thickness: **1.6MM** Finished Outer Copper: **2OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1125
L2-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L4-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L6-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L8-CU	Outer Base Copper 1.5OZ	0.0525	0.0525 (Plating to 2OZ)

* Thickness after lamination: 1.55mm, tolerance: ±10%
* Finished PCB Thickness: 1.65mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

5 **8-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.6 (Core with Cu)
CORE	Core DK:4.6	0.5300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.6 (Core with Cu)
CORE	Core DK:4.6	0.5300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.6 (Core with Cu)
CORE	Core DK:4.6	0.5300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L8-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.29mm, tolerance: ±10%
* Finished PCB Thickness: 2.39mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

6 **8-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1125
L2-CU	Inner Copper 1OZ	0.0350	0.6 (Core with Cu)
CORE	Core DK:4.6	0.5300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.6 (Core with Cu)
CORE	Core DK:4.6	0.5300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.6 (Core with Cu)
CORE	Core DK:4.6	0.5300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L8-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.25mm, tolerance: ±10%
* Finished PCB Thickness: 2.35mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

SHOW MORE

10 Layers Total: 33

View all

1 10-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0925
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1750
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1750
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1750
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0925
L10-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.55mm, tolerance: ±10%
* Finished PCB Thickness: 1.65mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 10-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0855
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1610
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0855
L10-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.49mm, tolerance: ±10%
* Finished PCB Thickness: 1.59mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

3 10-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1055
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1055
L10-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.49mm, tolerance: ±10%
* Finished PCB Thickness: 1.59mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

4 **10-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1855
L2-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L8-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1855
L10-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.33mm, tolerance: ±10%
* Finished PCB Thickness: 2.43mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

5 **10-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1785
L2-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L8-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1785
L10-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.28mm, tolerance: ±10%
* Finished PCB Thickness: 2.38mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

6 **10-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1055
L2-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L4-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L6-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L8-CU	Inner Copper 1OZ	0.0350	0.4 (Core with Cu)
CORE	Core DK:4.6	0.3300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1055
L10-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.29mm, tolerance: ±10%
* Finished PCB Thickness: 2.39mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

SHOW MORE

12 Layers Total: 12

View all

1 12-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0925
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0925
L12-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.55mm, tolerance: ±10%
* Finished PCB Thickness: 1.65mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 12-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0855
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0680
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0680
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0680
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0680
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0855
L12-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.48mm, tolerance: ±10%
* Finished PCB Thickness: 1.58mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

3 12-layers PCB Regular

Thickness: **1.6MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0785
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0785
L12-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.52mm, tolerance: ±10%
* Finished PCB Thickness: 1.62mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

4 **12-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1855
L2-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L8-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L10-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1855
L12-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.34mm, tolerance: ±10%
* Finished PCB Thickness: 2.44mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

5 **12-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	7628 RC46% DK:4.74	0.1960	0.1785
L2-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L8-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L10-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1785
L12-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.27mm, tolerance: ±10%
* Finished PCB Thickness: 2.37mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

6 **12-layers PCB** Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1055
L2-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L4-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L6-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L8-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	7628 RC46% DK:4.74	0.1960	0.1470
L10-CU	Inner Copper 1OZ	0.0350	0.3 (Core with Cu)
CORE	Core DK:4.6	0.2300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1055
L12-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.33mm, tolerance: ±10%
* Finished PCB Thickness: 2.43mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

SHOW MORE

14 Layers Total: 6

View all

1 14-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L8-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L10-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L12-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L14-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.26mm, tolerance: ±10%
* Finished PCB Thickness: 2.35mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 14-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	1080 RC68% DK:4.21	0.0810	0.1935
PP	2116 RC58% DK:4.45	0.1300	
L2-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L8-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L10-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L12-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1935
PP	1080 RC68% DK:4.21	0.0810	
L14-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.34mm, tolerance: ±10%
* Finished PCB Thickness: 2.43mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

3 14-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.2085
PP	2116 RC58% DK:4.45	0.1300	
L2-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L4-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L6-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L8-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L10-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L12-CU	Inner Copper 1OZ	0.0350	0.24 (Core with Cu)
CORE	Core DK:4.6	0.1700	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.2085
PP	3313 RC58% DK:4.45	0.1030	
L14-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.3mm, tolerance: ±10%
* Finished PCB Thickness: 2.39mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

4 **14-layers PCB** Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0925
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L12-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L13-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0925
L14-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.97mm, tolerance: ±10%
* Finished PCB Thickness: 2.07mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

5 **14-layers PCB** Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1125
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L12-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L14-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.94mm, tolerance: ±10%
* Finished PCB Thickness: 2.04mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

6 **14-layers PCB** Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1055
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L12-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1055
L14-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.85mm, tolerance: ±10%
* Finished PCB Thickness: 1.95mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

16 Layers Total: 6

View all

1 16-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L12-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L14-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L16-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.33mm, tolerance: ±10%
* Finished PCB Thickness: 2.43mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 16-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1125
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1760
PP	1080 RC68% DK:4.21	0.0810	
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1760
PP	2116 RC58% DK:4.45	0.1300	
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L12-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L14-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L16-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.39mm, tolerance: ±10%
* Finished PCB Thickness: 2.49mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

3 16-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1055
L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L3-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L5-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L6-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L7-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L8-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L9-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L10-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L11-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L12-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L13-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L14-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
CORE	Core DK:4.6	0.1300	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1055
L16-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.32mm, tolerance: ±10%
* Finished PCB Thickness: 2.42mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

4 16-layers PCB Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L8-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L10-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L12-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L14-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L16-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.87mm, tolerance: ±10%
* Finished PCB Thickness: 1.97mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

5 16-layers PCB Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1125
L2-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1760
PP	1080 RC68% DK:4.21	0.0810	
L8-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L9-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1760
PP	2116 RC58% DK:4.45	0.1300	
L10-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L12-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L14-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L16-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.94mm, tolerance: ±10%
* Finished PCB Thickness: 2.04mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

6 16-layers PCB Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	1080 RC68% DK:4.21	0.0810	0.1375
PP	1080 RC68% DK:4.21	0.0810	
L2-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L3-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L4-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L5-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L6-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L7-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L8-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L9-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L10-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L11-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L12-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L13-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L14-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L15-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1375

PP	1080 RC68% DK:4.21	0.0810	
L16-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.93mm, tolerance: ±10%
* Finished PCB Thickness: 2.03mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

18 Layers Total: 6

View all

1 18-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1195
L2-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L4-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L6-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L8-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L10-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L12-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L14-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1090
L16-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L17-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1195
L18-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.25mm, tolerance: ±10%
* Finished PCB Thickness: 2.35mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

2 18-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	1080 RC68% DK:4.21	0.0810	0.1935
PP	2116 RC58% DK:4.45	0.1300	
L2-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L4-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L6-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L8-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L10-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L12-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L14-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0950
L16-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L17-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1935
PP	1080 RC68% DK:4.21	0.0810	
L18-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.3mm, tolerance: ±10%
* Finished PCB Thickness: 2.40mm, tolerance: ±10%

3 18-layers PCB Regular

Thickness: **2.4MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	1080 RC68% DK:4.21	0.0810	0.1375
PP	1080 RC68% DK:4.21	0.0810	
L2-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L3-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L4-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L5-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L6-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L7-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L8-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L9-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L10-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L11-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L12-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L13-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	
L14-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L15-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1130
PP	1080 RC68% DK:4.21	0.0810	

* Finished PCB Thickness: 2.40mm, tolerance: ±10%

* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

PP	1080 RC68% DK:4.21	0.0810	
L16-CU	Inner Copper 1OZ	0.0350	0.151 (Core with Cu)
CORE	Core DK:4.6	0.0810	
L17-CU	Inner Copper 1OZ	0.0350	
PP	1080 RC68% DK:4.21	0.0810	0.1375
PP	1080 RC68% DK:4.21	0.0810	
L18-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 2.31mm, tolerance: ±10%

* Finished PCB Thickness: 2.41mm, tolerance: ±10%

* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

4 18-layers PCB Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	3313 RC58% DK:4.45	0.1030	0.0925
L2-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L3-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L4-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L5-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L6-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L7-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L8-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L9-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L10-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L11-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L12-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L13-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L14-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L15-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0820
L16-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L17-CU	Inner Copper 1OZ	0.0350	
PP	3313 RC58% DK:4.45	0.1030	0.0925
L18-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.87mm, tolerance: ±10%
* Finished PCB Thickness: 1.97mm, tolerance: ±10%
* Inner layer Residual copper ratio > 60%, it is suitable to choose a lamination structure with 70% inner layer Residual copper ratio.

5 18-layers PCB Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **0.5OZ** Inner layer Residual copper ratio: **50%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1213
L2-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L3-CU	Inner Copper 0.5OZ	0.0175	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L4-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L5-CU	Inner Copper 0.5OZ	0.0175	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L6-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L7-CU	Inner Copper 0.5OZ	0.0175	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L8-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L9-CU	Inner Copper 0.5OZ	0.0175	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L10-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L11-CU	Inner Copper 0.5OZ	0.0175	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L12-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L13-CU	Inner Copper 0.5OZ	0.0175	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L14-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L15-CU	Inner Copper 0.5OZ	0.0175	
PP	2116 RC58% DK:4.45	0.1300	0.1125
L16-CU	Inner Copper 0.5OZ	0.0175	0.1 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L17-CU	Inner Copper 0.5OZ	0.0175	

6 18-layers PCB Regular

Thickness: **2.0MM** Finished Outer Copper: **1OZ**
Inner Copper: **1OZ** Inner layer Residual copper ratio: **30%**

Layer	Material	Thickness (mm)	Thickness after lamination(mm)
L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
PP	2116 RC58% DK:4.45	0.1300	0.1055
L2-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L3-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L4-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L5-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L6-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L7-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L8-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L9-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L10-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L11-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L12-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L13-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L14-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L15-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.0810
L16-CU	Inner Copper 1OZ	0.0350	0.135 (Core with Cu)
CORE	Core DK:4.6	0.0650	
L17-CU	Inner Copper 1OZ	0.0350	
PP	2116 RC58% DK:4.45	0.1300	0.1055
L18-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.89mm, tolerance: ±10%
* Finished PCB Thickness: 1.99mm, tolerance: ±10%
* Inner layer Residual copper ratio ≤ 40%, it is suitable to choose a lamination structure with 30% inner layer Residual copper ratio.

	0.5OZ		
PP	2116 RC58% DK:4.45	0.1300	0.1213
L18-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)

* Thickness after lamination: 1.87mm, tolerance: ±10%
* Finished PCB Thickness: 1.97mm, tolerance: ±10%
* 40% < Inner layer Residual copper ratio ≤ 60%, it is suitable to choose a lamination structure with 50% inner layer Residual copper ratio.

Capabilities

PCB Capabilities
PCB Assembly Service
Quick turn PCB Fabrication
SMD Stencils
Prototype PCBs
Quality Control

Products/Services

PCB Instant Quote
PCB FAQs
PCB Prototyping
Our Equipment
Blog/Engineering
PCB Products

Customer Support

Contact Us
Help Center
Sponsorships
Shared Projects
PCB Glossary
Referral Program

About us

About Us
Why Buy From Us?
Shipping Method Guide
Privacy Policy & Agreement
Refund Policy
Terms of Service

Payment Methods

Delivery Services

Verified by

Link Us on

PCB Prototype the Easy Way!

© 2024 PCBWay. All rights reserved.