Quantum Solid State Chip — Fabrication Protocol

Same chip architecture, middle block = CVD diamond NV^- plate (D ≈ 2.87 GHz, T_2 ≈ 1.8 ms @ 300 K) · green CQD pump + 650 nm filter + graphene detector reused unchanged

QSSC v2.0.0
Diamond variant v1.0
Markdown source: FABRICATION_PROTOCOL_Diamond.md

1. Abstract

2. Introduction & Scientific Basis

2.1 Why NV-diamond for the same chip

2.2 Why the green CQD emitter is reused unchanged

2.3 Why the detector and filter are reused unchanged

2.4 Architecture overview

3. Materials & Bill of Materials (BOM) — deltas from the hBN base

3.1 Added / substituted reagents

3.2 Removed from hBN BOM (not needed)

3.3 Equipment deltas

Section 1 — CQD Emitter Array (UNCHANGED from hBN base)

Section 2 — Diamond Plate Preparation + NV^- (REPLACES the hBN

section)

2.1 Procurement

2.2 Surface cleaning

2.3 NV^- activation (ONLY if the plate needs it)

2.4 Site density and surface proximity

2.5 No PMMA-on-host step

Section 3 — On-Chip Fluorescence Photodetector Array (Graphene / MoS_2) (UNCHANGED)

Section 4 — Waveguides, Stacking (bulk geometry), Thermal,

Contacts

4.1 TEOS sol-gel silica waveguides (on the diamond)

4.2 Coupling the CQD emitter to the waveguide (unchanged)

4.3 Stacking (bulk, not 2D)

4.4 Peltier thermal management (unchanged)

4.5 Contacts and encapsulation (unchanged)

4.6 Coplanar waveguide (MW) for ODMR (unchanged, frequency changes)

Section 5 — Characterization & Testing

5.1 Electroluminescence (CQD array) — unchanged

5.2 ODMR of NV^- in diamond

5.3 Spin coherence (T_2)

5.4 Coupling efficiency (waveguide → detector) — unchanged

5.5 End-to-end functional test

5.6 Emitter ↔ qubit ↔ detector calibration (software pulse-capture) — unchanged

Section 6 — Safety

7. Expected Performance Table (NV-diamond variant)

8. Validation Against Known Studies

8.1 NV^- centre — D, ODMR, coherence

8.2 CQD green emitter / graphene detector / waveguides

8.3 Diamond surface preparation

References (platform-specific; CQD/detector/waveguide refs are in the hBN base)

Quantum Solid State Chip (Room Temperature) — Fabrication Protocol · NV-Diamond variant

Project: QSSC (Quantum Solid State Chip, room-temperature demonstrator) **Document type:** Laboratory fabrication protocol (standalone variant) **Version:** 1.0 **Variant:** NV-diamond (negatively-charged nitrogen-vacancy, NV^-) **Scope:** Same chip architecture as the hBN base protocol — (1) an electrically-pumped carbon-quantum-dot (CQD) green ASE/LED emitter array, (2) **TEOS sol-gel silica (SiO_2) waveguides** (replacing SU-8 for negligible autofluorescence under the 532 nm pump), and (3) an on-chip 2D-material (graphene/MoS_2) photodetector array with FPGA readout and software pulse-capture calibration — but the **middle spin-host block is a CVD diamond plate hosting NV^- centres** (zero-field splitting $D \approx 2.87$ GHz, PL 637–800 nm, $T_2 \approx 1.8$ ms at 300 K). The optical/electronic chain (green CQD pump, 650 nm red long-pass filter, graphene detector, ADF4351 MW) is **unchanged** from the hBN chip; only the host, the defect-creation step, the geometry (bulk vs 2D) and the MW frequency change.

Microdiamond-layer option (home-lab / budget). Instead of a bulk CVD plate, the spin host can be a **layer of commercial NV^- microdiamonds (~100 nm, pre-activated, $30–60/100 mg) dispersed in a TEOS sol-gel SiO_2 matrix** and spin-coated on a 10×10 mm glass carrier. This trades the bulk plate's ~ms T_2 for µs-scale ensemble T_2 (surface-proximity-limited) but **removes the tube-furnace and the $50–250 plate**, making it the route used by the home-lab prototype `FABRICATION_PROTOCOL_P0.md`.

Note. The NV^- variant is the **easiest platform swap** in the QSSC family because the NV^- is pumped at **532 nm green** — exactly the colour the on-chip CQD emitter already makes — and its red/NIR PL (637–800 nm) passes the **same 650 nm long-pass filter** and is read by the **same graphene/MoS_2 array** as the hBN chip. The emitter, filter, detector and FPGA are reused verbatim. What you give up relative to hBN is the 2D / van-der-Waals integrability and the atomically-flat surface proximity: diamond is a **bulk 3D plate**, so the emitter and detector sit *on top* of the diamond rather than in a stacked 2D heterostructure. What you gain is **~900× better room-temperature coherence** (T_2 1.8 ms vs 2 µs), enough to run small quantum algorithms at 300 K with dynamical decoupling.

On-chip emitter (no big diodes). This variant keeps the **on-chip CQD emitter** as the pump — no external laser diode is required. (The SiC variant is the one that needs a different on-chip emitter; diamond reuses the green CQD unchanged.)

---

1. Abstract

This document specifies a complete, equipment-minimal fabrication protocol for a room-temperature solid-state quantum photonic chip (QSSC) built on a **CVD diamond plate hosting NV^- centres**. The chip combines three functional blocks on a single 25 × 25 mm^2 carrier: (i) a hydrothermally-synthesized **green (~520–540 nm)** carbon quantum dot (CQD) emitter array in a polymeric LED/ASE stack (ITO/PEDOT:PSS/CQD–PVA/ZnO/Ag) that doubles as the optical pump for the NV^- (532 nm excitation band) — no external pump laser; (ii) a **commercial CVD diamond plate with NV^- centres** (D ≈ 2.87 GHz, ZPL 637 nm, phonon sideband to ~800 nm, T_2 ≈ 1.8 ms at 300 K), cleaned and (if needed) annealed to activate implanted vacancies; and (iii) **TEOS sol-gel silica (SiO_2) waveguides** routing the red/NIR NV PL to an **on-chip graphene/MoS_2 photodetector array** read directly by the FPGA, with software pulse-capture calibration (no camera, no alignment jig). A Peltier module holds the diamond at 288–300 K. All processing uses benchtop chemistry, a spin coater, a hotplate, contact-mask UV, a tube furnace (for the optional NV-activation anneal) and a ~USD 3,000–3,500 equipment footprint beyond an optical microscope.

---

2. Introduction & Scientific Basis

2.1 Why NV-diamond for the same chip

The negatively-charged nitrogen-vacancy centre (NV^-) in diamond is the **canonical room-temperature optically-addressable spin**: spin-1 (S=1), zero-field splitting **D ≈ 2.87 GHz**, optical initialization and single-shot readout at 300 K, and Hahn-echo coherence **T_2 ≈ 1.8 ms** in ^{12}C-enriched diamond (≈0.5–0.7 ms in natural-abundance diamond) — extended toward 1 s with dynamical decoupling. For the QSSC architecture this means the **same control/readout stack** as the hBN chip drives a qubit that can actually run small quantum algorithms at room temperature, not only sense.


2.2 Why the green CQD emitter is reused unchanged

NV^- is optically excited at **532 nm** — the same green band the citric-acid+urea CQDs already produce at ~220 °C hydrothermal temperature. So the entire Section-1 emitter (ITO/PEDOT:PSS/CQD–PVA/ZnO/Ag, green, silver-paste cathode) is reused **without modification**. The on-chip emitter pumps the NV^- directly; no external 532 nm laser is needed for the end-to-end demo.

2.3 Why the detector and filter are reused unchanged

NV^- photoluminescence is the zero-phonon line at **637 nm** plus a broad phonon sideband extending to **~800 nm** (red/NIR). The **650 nm red photographic long-pass** passes the 637–800 nm PL and blocks the 532 nm green pump — the **same filter** used for the hBN chip. The graphene/MoS_2 photodetector reads 637–800 nm; MoS_2 (monolayer bandgap ~690 nm) actually absorbs a larger share of the NV PL than it does of the hBN 850 nm emission, so the detector works **at least as well** here.

2.4 Architecture overview

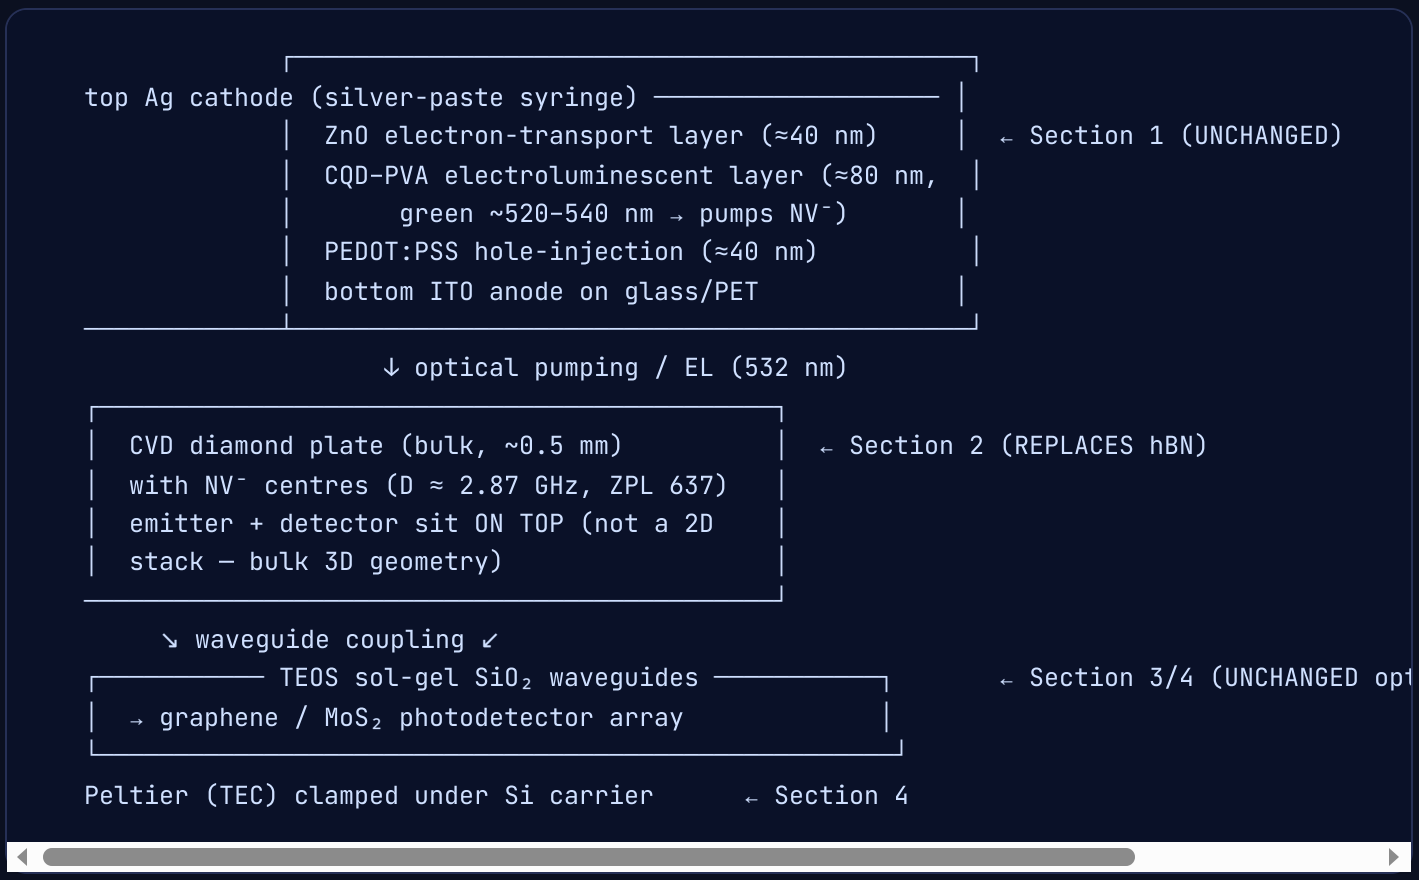

---

3. Materials & Bill of Materials (BOM) — deltas from the hBN base

Only the **host** and one optional anneal change. Everything else (CQD chemicals, emitter stack, graphene/MoS_2, **TEOS/MTEOS sol-gel**, Peltier, FPGA/ADF4351, 650 nm filter) is the same BOM as the hBN protocol.

3.1 Added / substituted reagents

ITEM	SPEC / SOURCE	QTY	APPROX. COST
CVD diamond plate with NV^- centres	"CVD diamond with NV centres" / Type Ib diamond, ~2×2×0.5 mm or ~3×3×0.5 mm, NV density ~10^{10}–10^{12} cm^{-3} (Alibaba / Element Six / 2DBS)	1 plate	$50–$250
Alternative: HPHT Type Ib diamond (natural substitutional N, form NV^- on anneal)	—	1 plate	$40–$150
Boiling acid clean mix: H_2SO_4:HNO_3:H_2O_2 (3:1:1, "piranha-triacid")	—	50 mL	$20
0.1 M HNO_3 (surface rinse)	—	100 mL	$15
(Optional, if NV not pre-activated) N_2 / forming-gas anneal consumables	—	—	$10

3.2 Removed from hBN BOM (not needed)

- hBN powder, NMP, PMMA (as hBN passivation — a thin PMMA cap is still used on the *emitter*, but not on the diamond), the wet-chemical/hBN defect-engineering reagents. **Carbon CQD synthesis reagents stay** (the emitter is identical).

3.3 Equipment deltas

- The tube furnace (to 1100 °C) is **only needed if the purchased plate requires an NV-activation/vacancy-anneal step** (~800 °C). Many CVD-NV plates arrive NV-active and need only a clean. If buying "NV-ready" plate, the furnace is optional.
- Everything else (hotplate, autoclave, sonicator, spin coater, UV, Peltier, sourcemeter, lock-in, 650 nm filter, ADF4351) is unchanged from the hBN BOM.

Section 1 — CQD Emitter Array (UNCHANGED from hBN base)

Goal: Synthesize **green** (~520–540 nm) N-doped CQDs and integrate them into a patterned ITO/PEDOT:PSS/CQD–PVA/ZnO/Ag electroluminescent diode array (8 × 8 pixels, 1 mm² each) on a 25 × 25 mm² ITO-glass substrate. The green emitter doubles as the pump for the NV^- (532 nm band). **This section is identical to the hBN protocol Section 1** — the same citric-acid+urea hydrothermal route at ~220 °C, the same p-i-n stack, the same ZnO ETL and silver-paste cathode. No ethylenediamine is required; emission colour is set by hydrothermal temperature (~220 °C → green).

> **Key parameters (unchanged):** CQD PL peak 520–540 nm (green), EL turn-on 4–8 V, ASE detectable under overdrive (FWHM narrowing < 25 nm), target radiance ≥ 10 cd/m². The full step-by-step procedure (1.1 hydrothermal synthesis, 1.2 CQD–PVA ink, 1.3 ITO substrate, 1.4 PEDOT:PSS, 1.5 CQD emissive layer, 1.5b ZnO ETL, 1.6 silver-paste cathode, 1.7 EL/ASE check) is reproduced verbatim from the hBN base protocol — see `FABRICATION_PROTOCOL.md` Section 1. **Only the destination of the pump light changes** (NV^- in diamond instead of V_B^- in hBN).

Timing: ≈ 3 working days (synthesis 8 h + dialysis 48 h unattended + film stack 1 day).

Section 2 — Diamond Plate Preparation + NV^- (REPLACES the hBN section)

Goal: Obtain a clean CVD diamond plate hosting optically-addressable NV^- centres (D ≈ 2.87 GHz) at ensemble density suitable for 8 × 8 site addressing, with the surface ready to receive the emitter/waveguide/detector stack on top.

2.1 Procurement

1. **Buy the plate.** Order a **CVD diamond plate with NV^- centres** (~2×2×0.5 mm to ~3×3×0.5 mm, optical/CVD grade, NV density ~10^{10}–10^{12} cm^{-3}). Search terms: "CVD diamond NV centre", "nitrogen vacancy diamond plate", "Type Ib diamond". For a budget demonstration, a small Type Ib HPHT plate (natural substitutional nitrogen, which forms NV^- on anneal) is adequate. Expect ~$50–$250 retail.
2. **Spec check.** Confirm with the vendor that NV^- are present and optically active (vendor ODMR plot if available). If buying bare CVD N-doped diamond *without* NV^- formed, you must implant/anneal (Route B below) — prefer buying NV-ready to avoid an ion implanter.

2.2 Surface cleaning

3. **Solvent clean.** Sonicate 5 min each in acetone, IPA, DI water.
4. **Acid clean.** Boil in **H_2SO_4:HNO_3:H_2O_2 = 3:1:1** at ~90 °C for 30 min (removes graphitic/surface contamination, leaves an oxygen-terminated surface). **Cool**, then rinse copiously in DI water. (Fume hood, full PPE — strong oxidizer.) - Alternative: **O_2 plasma** (100 W, 10 min) for a dry, mask-friendly clean if you want to avoid hot acid.
5. **Final rinse.** 0.1 M HNO_3 dip 1 min, DI rinse, N_2 blow dry. Surface is now O-terminated, hydrophilic, ready for layer deposition.

2.3 NV^- activation (ONLY if the plate needs it)

Route A — Pre-activated (preferred, no furnace needed). Many CVD-NV plates arrive with NV^- already formed. If the vendor confirms optically-active NV^-, **skip to 2.4**. No high-temperature step is required.

Route B — Anneal to form NV^- (if vacancies are present but not yet bound to N, e.g. as-implanted or irradiated plate).

6. **Vacuum / Ar anneal.** Place the cleaned plate in the tube furnace, pump to < 10^{-5} mbar (or flowing Ar / forming gas 5 % H_2). Ramp to **800 °C, 2 h**. This mobilizes vacancies, which diffuse to substitutional N and form NV^-. Cool to < 100 °C in Ar before removing. *This step needs the tube furnace — the 350 °C hotplate cannot reach it.*
7. **Optional surface graphitization removal.** Re-do step 4 (boiling acid) for 10 min to remove any surface graphitization from the anneal.

> **Note on creating NV^- from scratch (not recommended for the maker route):** Growing NV^- requires either CVD growth with in-situ N doping (needs a CVD diamond reactor) or N^+ ion implantation + 800–1200 °C anneal (needs an ion implanter). Both are outside maker scope. **Buy the plate with NV^- already in it** — this is the whole point of choosing diamond for this variant.

2.4 Site density and surface proximity

8. **Density.** Ensemble NV^- density ~10^{10}–10^{12} cm^{-3} is typical for CVD-NV plates; at the plate surface this gives resolvable ensemble spots for 8 × 8 ODMR. If single-site addressing is desired, buy a low-density (~10^9 cm^{-3}) plate.
9. **Depth caveat.** Unlike 2D hBN where defects sit at the surface, NV^- in a bulk plate are **distributed through the ~0.5 mm thickness**. For sensing you may want shallow NV^- (within ~10 nm of the surface); specify "shallow NV" or "delta-doped" with the vendor. For the QSSC compute/sensor demonstrator, ensemble bulk NV^- is fine; the trade-off vs hBN is **worse surface proximity, far better coherence**.

2.5 No PMMA-on-host step

10. Unlike hBN, **no PMMA passivation coat is applied to the diamond**. Diamond is chemically inert and the NV^- charge state is intrinsically stable at the surface (unlike V_B^-). Proceed directly to waveguide/emitter/detector deposition on the cleaned diamond surface (Section 4). A thin **TEOS sol-gel SiO_2** planarization layer may be spun on the diamond first if the surface is too rough for waveguide adhesion.

Timing, Section 2: clean 1 h + (optional) anneal 4 h. **Total: ~0.5–1 working day** (far faster than hBN exfoliation + defect engineering).

Section 3 — On-Chip Fluorescence Photodetector Array (Graphene / MoS_2) (UNCHANGED)

Goal: N-electrode graphene/MoS_2 photodetector array on-chip, read directly by the FPGA, software pulse-capture calibration (Section 5.6). **Identical to the hBN protocol Section 3.** The only platform note: NV^- PL (637–800 nm) is **better matched to MoS_2** (monolayer bandgap ~690 nm) than hBN's 850 nm emission, so the MoS_2 photogating channel contributes more gain here; bare graphene still carries the broadband absorption up to ~800 nm.

- CVD graphene transfer, MoS_2 transfer, Au/Cr source-drain electrodes, O_2-plasma channel isolation, bias 0.1–1 V, lock-in readout — all as in the hBN base protocol. No discrete photodiodes, no external camera.

Section 4 — Waveguides, Stacking (bulk geometry), Thermal, Contacts

4.1 TEOS sol-gel silica waveguides (on the diamond)

> **Why not SU-8.** SU-8 autofluoresces under the 532 nm green pump and has C–H-overtone NIR loss — it would bury the NV^- PL (637–800 nm, ODMR contrast 2–30 %) under waveguide background. **TEOS sol-gel SiO_2** is fluorescence-free, UV–NIR transparent, and survives the 300–400 °C densification. Core/clad contrast is set by a silane dopant (MTEOS), not an organic polymer.

1. If the diamond surface is rough (> few nm Ra), spin a thin **pure-TEOS sol-gel SiO_2 planarization layer** (TEOS:EtOH:H_2O:HCl = 1:4:2:0.02 mol, aged 24 h; spin 1000 rpm → ~1 µm, bake 80 °C 10 min, densify 300 °C 30 min). Repeat 3–5× to build ~5 µm. Then spin the **MTEOS-doped core sol** (15 mol % MTEOS, n ≈ 1.50; 2000 rpm → ~0.5–1 µm) and pattern waveguides 5–10 µm wide, 5–20 mm long by soft-lithography / UV embossing with a PDMS stamp (see hBN protocol §4.1). Clad with pure-TEOS sol-gel (n ≈ 1.45); densify 300–400 °C, 1 h. - Diamond's refractive index (n ≈ 2.4) is high; keep the sol-gel planarization layer thick enough (~5 µm) that waveguide modes are not pulled into the diamond. This is the main optical difference from the hBN chip (where the SiO_2/Si carrier is a cleaner substrate).

4.2 Coupling the CQD emitter to the waveguide (unchanged)

2. Cleave the CQD stack so the green gain-strip edge faces the sol-gel SiO_2 input facet; butt-couple in the alignment jig; UV-cure NOA 61. Coupling 20–60 % as in the hBN protocol.

4.3 Stacking (bulk, not 2D)

3. **Stack order (bottom→top):** Si/SiO_2 carrier → Peltier TEC top plate → **diamond plate** (face up) → TEOS sol-gel SiO_2 waveguides (core+clad) → CQD emitter chip (edge-coupled) → graphene/MoS_2 detector at waveguide output. The diamond replaces the hBN-on-SiO_2 chip; the rest of the stack is the same. Bond with thin PDMS/cyanoacrylate at corners; cure 80 °C, 1 h. Wire-bond or silver-paste the CQD anode/cathode and detector source/drain to a PCB fan-out.

4.4 Peltier thermal management (unchanged)

4. 2-stage TEC (or TEC1-12706), NTC thermistor, PID set to **295 K ± 0.1 K**, < 5 W. Diamond's thermal conductivity (~2000 W/m·K, 4× better than Si) makes temperature stability **easier** than the hBN chip — the diamond itself is an excellent heat spreader.

4.5 Contacts and encapsulation (unchanged)

5. Au wire / silver-paste to a 0.1" header: ITO anode (×8 rows), Ag cathode (×8 cols), detector drains (×N), gate (×1), thermistor (×2), TEC ± (×2). Encapsulate under a 1 mm PDMS slab, leaving the waveguide output facet exposed.

4.6 Coplanar waveguide (MW) for ODMR (unchanged, frequency changes)

6. Hand-etch a 50 Ω CPW on FR4/Rogers; mount the diamond plate face-down over the signal line (≤ 50 µm gap) or flip-chip with anisotropic conductive paste. **Microwave frequency changes from 3.46 GHz (hBN) to 2.87 GHz (NV^-)** — well within the ADF4351 range (35 MHz–4.4 GHz), no hardware change.

Section 5 — Characterization & Testing

5.1 Electroluminescence (CQD array) — unchanged

Drive each pixel 0–15 V, confirm turn-on 4–8 V and broadband green EL; ASE check (FWHM narrowing < 25 nm). As in the hBN protocol.

5.2 ODMR of NV^- in diamond

4. **Optical:** on-chip green CQD emitter (~532 nm, ~1 mW at the sample) — no external laser. Collect NV^- PL at **637–800 nm** through the **650 nm red photographic long-pass filter** (passes the red/NIR NV PL, blocks the 532 nm green pump) into the **on-chip graphene/MoS_2 detector array**. No Si APD / discrete photodiode.
5. **Microwave:** sweep **2.80–2.94 GHz** from the function generator / ADF4351 through the CPW. Modulate MW at 1 kHz for lock-in detection of the ODMR dip.
6. **Expected resonance:** a single dip at **D ≈ 2.87 GHz** (the ^{14}N 3-line hyperfine, A ≈ 2.16 MHz, is sub-linewidth and usually merges into one dip at B=0; it splits into a doublet under a static B_0). ODMR contrast **2–30 %** (ensemble/single), linewidth **1–10 MHz**. NV^- ODMR contrast is **higher** than V_B^- (0.5–3 %), so readout is easier.
7. **Magnetic field sweep:** apply B_0 along the NV axis; observe D shift $D(B) = D_0 \pm \gamma_e \cdot B_0$, $\gamma_e/2\pi \approx 28$ GHz/T; the resonance splits into a doublet — confirms the S=1 triplet.

5.3 Spin coherence (T_2)

8. **Pulsed ODMR** (Hahn echo, π/2–τ–π–τ–echo). Vary τ from 1 µs to **2 ms**. Fit echo vs τ to $\exp[-(2\tau/T_2)^n]$.
9. **Expected T_2: 0.5–1.8 ms at room temperature** (≈0.5–0.7 ms natural-abundance, ≈1.8 ms in ^{12}C-enriched CVD). T_1 typically **3–7 ms**. This is **~900× longer than V_B^-** and is why this variant can run small quantum algorithms at 300 K. With dynamical decoupling (XY8/CPMG) T_2 extends further.

5.4 Coupling efficiency (waveguide → detector) — unchanged

Inject calibrated 532 nm light into the sol-gel SiO_2 facet; measure output + on-chip detector photocurrent. Target 20–60 % coupling, < 0.5 dB/cm loss.

5.5 End-to-end functional test

12. Drive the CQD pixel electrically → green EL pumps the NV^- ensemble → collect 637–800 nm NV PL (through the 650 nm long-pass filter) at the on-chip graphene/MoS_2 detector → photocurrent modulated by MW at **2.87 GHz** → FPGA/lock-in reads the ODMR dip. Successful end-to-end ODMR with the **on-chip CQD pump** (no external laser) is the chip's defining demonstration —

identical concept to the hBN chip, at a different MW frequency and with ~900× more coherence headroom.

5.6 Emitter ↔ qubit ↔ detector calibration (software pulse-capture) — unchanged

13. Same automated FPGA sweep as the hBN chip: for each emitter pixel fire a green pump pulse, sample every detector electrode, record which sees a modulated NV-PL response under MW at **2.87 GHz** → build the emitter-pixel → qubit-site → detector-electrode lookup table. No camera, no alignment jig. (The only change is the MW frequency in the sweep.)

Section 6 — Safety

HAZARD	CONTROL
Boiling H_2SO_4:HNO_3:H_2O_2 (triacid)	Fume hood, nitrile + butyl gloves, face shield; strong oxidizer; add peroxide last; never seal hot
HNO_3, HCl	Fume hood, PPE
Tube furnace 800 °C	Heat-resistant gloves; cool in Ar before opening; fire risk
Hydrothermal autoclave 220 °C (CQD synthesis)	Never open hot; cool < 60 °C; rated PTFE liner
532 nm laser / high-brightness CQD EL	Laser goggles if using an external 532 for characterization; treat bright green LED as eye hazard
MW up to 4 GHz, < +20 dBm	Low risk; keep > 30 cm from antenna
Peltier / hot surfaces	Heat-resistant gloves
Nanomaterials (CQDs, graphene/MoS_2)	N95; wet-clean; dispose as solid nano-waste

7. Expected Performance Table (NV-diamond variant)

PARAMETER	TARGET / EXPECTED	BASIS
CQD pump (on-chip)	green 520–540 nm (unchanged)	Sec. 1
CQD EL turn-on	4–8 V	Sec. 1
CQD lasing	**NOT claimed** (ASE only)	see note
Host	CVD diamond plate (bulk 3D)	Sec. 2
Defect	NV^-, S=1, D ≈ 2.87 GHz	Sec. 2, 5.2
NV^- PL	637 nm ZPL + sideband to ~800 nm	Sec. 5.2
Optical filter	**650 nm red long-pass (unchanged)**	Sec. 5.2
Defect density	~10^{10}–10^{12} cm^{-3} (ensemble)	Sec. 2.4
ODMR contrast	2–30 %	Sec. 5.2
ODMR linewidth	1–10 MHz	Sec. 5.2
Spin coherence T_2 (RT)	**0.5–1.8 ms**	Sec. 5.3
Spin relaxation T_1 (RT)	3–7 ms	Sec. 5.3
Compute at 300 K?	**YES** (with DD; small Shor N=15 fits T_2)	Sec. 5.3
Waveguide coupling	20–60 %	Sec. 4.2
Graphene detector responsivity	0.01–0.1 A/W (MoS_2 10–10^2 A/W)	Sec. 3
Operating temperature	288–300 K (set 295 K)	Sec. 4.4
TEC power	< 5 W	Sec. 4.4
Chip footprint	25 × 25 mm^2 (host = diamond plate ~3×3×0.5 mm)	Sec. 2

8. Validation Against Known Studies

8.1 NV^- centre — D, ODMR, coherence

- **NV^- centre review (D ≈ 2.87 GHz, room-temperature spin):** Doherty et al., *Phys. Rep.* 528, 1–45 (2013) — the canonical reference for the NV centre Hamiltonian and optical cycle.
- **Nanoscale magnetometry with NV^- at ambient:** Balasubramanian et al., *Nature* 455, 648–651 (2008).
- **Single-spin coherent oscillations:** Jelezko et al., *PRL* 92, 076401 (2004).
- **Nanoscale magnetic sensing:** Maze et al., *Nature* 455, 644–647 (2008).
- **Near-second coherence under decoupling (T_2 → ~1 s):** Bar-Gill et al., *Nat. Commun.* 4, 1743 (2013).
- **1.8 ms Hahn-echo T_2 at 300 K in ^{12}C-enriched diamond:** Balasubramanian et al., *Nature Materials* 8, 383 (2009) — the basis for the T_2 = 1.8 ms figure used by the QSSC simulator `NV` profile.
- **NV T_1 at room temperature:** Jarmola et al., *PRL* 108, 197601 (2012).

8.2 CQD green emitter / graphene detector / waveguides

- Identical to the hBN base protocol validation (citric-acid+urea CQD synthesis, CQD-LED/ASE, SU-8/PDMS waveguides, graphene/MoS_2 photodetectors) — see `FABRICATION_PROTOCOL.md` Section 8. The 532 nm pump / 650–800 nm PL / 650 nm long-pass filter combination is the standard NV-ODMR optical chain, used in every NV reference above.

8.3 Diamond surface preparation

- Boiling triacid (H_2SO_4:HNO_3:H_2O_2) cleaning and O_2-plasma termination of diamond surfaces are standard NV-surface preparation, consistent with the NV-magnetometry literature above; no single landmark citation is required for the clean itself.

End of NV-diamond variant. This document is a maker-lab demonstrator specification. It reuses the hBN chip's emitter, filter, detector and FPGA verbatim; only the host (diamond plate), the defect-creation/anneal step, the bulk geometry and the MW frequency (2.87 GHz) change. Where primary literature is cited, consult the cited paper before relying on a specific numerical parameter.

References (platform-specific; CQD/detector/waveguide refs are

in the hBN base)

- [11] M. W. Doherty et al., "The nitrogen-vacancy colour centre in diamond," Phys. Rep. 528, 1–45 (2013). doi:10.1016/j.physrep.2013.02.001
- [12] G. Balasubramanian et al., "Nanoscale imaging magnetometry with diamond spins under ambient conditions," Nature 455, 648–651 (2008). doi:10.1038/nature07278
- [13] F. Jelezko et al., "Observation of coherent oscillations in a single electron spin," PRL 92, 076401 (2004). doi:10.1103/PhysRevLett.92.076401
- [14] J. R. Maze et al., "Nanoscale magnetic sensing with an individual electronic spin in diamond," Nature 455, 644–647 (2008). doi:10.1038/nature07279
- [23] N. Bar-Gill et al., "Solid-state electronic spin coherence time approaching one second," Nat. Commun. 4, 1743 (2013). doi:10.1038/ncomms2771
- G. Balasubramanian et al., "Ultralong spin coherence time in isotopically engineered diamond," Nature Materials 8, 383–387 (2009). doi:10.1038/nmat2420
- K. Jarmola et al., "Temperature- and magnetic-field-dependent luminescence of NV^- in diamond," PRL 108, 197601 (2012). doi:10.1103/PhysRevLett.108.197601