



# VBCore CAN FD Raspberry PI HAT v1.0

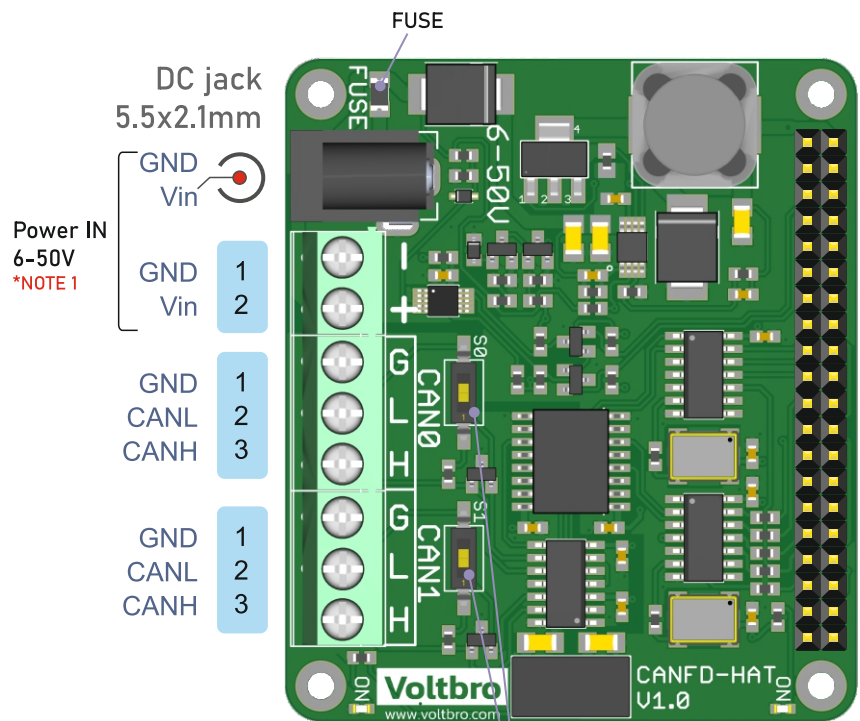

Power IN  
6-50V  
\*NOTE 1

**Terminator switch**  
ON position enables  
CAN line termination  
(120 Ohm)

## Raspberry PI headers

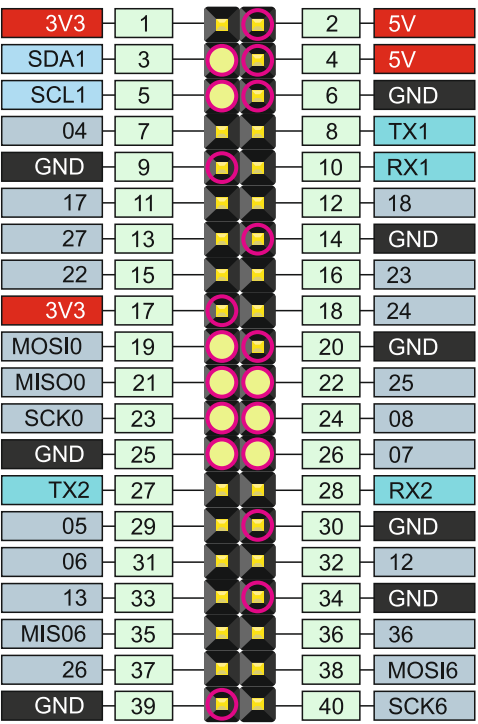

Connected pins  
Shared pins  
Free pins

## Voltage controll

ADS1115  
16-Bit I2C ADC

| Controll | PIN      | I2C  |
|----------|----------|------|
| AIN0     | 1/11 Vin |      |
| ADR      | GND      | 0x48 |
| SCL      | GPIO2    | SDA  |
| SDA      | GPIO3    | SCL  |

## CAN0 Channel

MCP2518FD  
CAN FD Controller with SPI Interface

| Controll | PIN    | Header |
|----------|--------|--------|
| MISO     | GPIO9  | 21     |
| MOSI     | GPIO10 | 19     |
| SCK      | GPIO11 | 23     |
| CS       | GPIO8  | 24     |
| INT      | GPIO25 | 22     |

## CAN1 Channel

MCP2518FD  
CAN FD Controller with SPI Interface

| Controll | PIN    | Notes |
|----------|--------|-------|
| MISO     | GPIO9  | 21    |
| MOSI     | GPIO10 | 19    |
| SCK      | GPIO11 | 23    |
| CS       | GPIO7  | 26    |
| INT      | GPIO24 | 18    |

## VBCore Raspberry PI CAN/CANFD HAT v1.0

VIN: 6-50V  
CAN FD CONTROLLER: MCP2518FD  
CAN TRANSCEIVER: MCP25612FD  
I2C Voltage control  
CAN / CAN-FD channels: 2  
Dimensions: 65x56mm  
Mount holes: 58x49mm D2.5 mm

## NOTES:

- DC jack and terminals are parallel - not connect simultaneously
- I2C lines SCL and SDA lines pulled up

**VB**Cores

www.vbcores.com  
Electronics for robotics  
research and development