
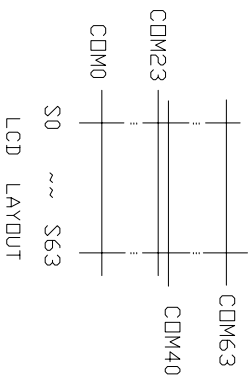


SYM	REV	DESCRIPTION	DATE
	01	First issue	Aug-05-2015
	02	fpc补强处厚度改0.2mm	Aug-10-2015

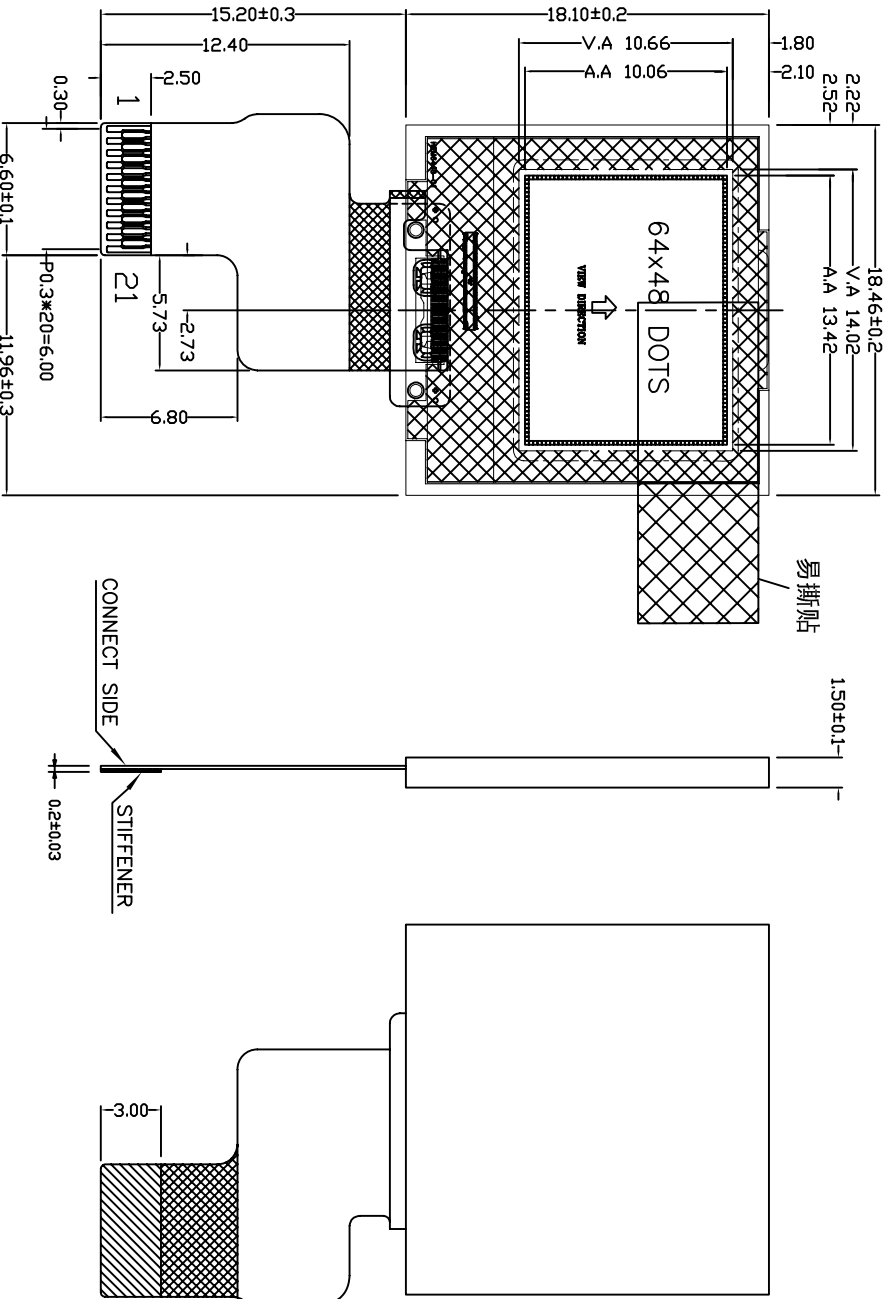

Pin Assignment	
NO.	SYMBOL
1	GND
2	GND
3	V0
4	NC
5	NC
6	NC
7	NC
8	VIO-18
9	GND
10	CS#
11	RES#
12	D/C#
13	SCK
14	SDA
15	GND
16	GND
17	NC
18	NC
19	NC
20	K-
21	A+

NOTES:

1. DISPLAY TYPE: FSTN/NEGATIVE
2. OPERATING VOLTAGE: VDD=1.8V, Vlcd=6.5V
3. OPERATING TEMPERATURE: -10°C~60°C
4. STORAGE TEMPERATURE: -20°C~70°C
5. DRIVE MODE: 1/49D,1/6B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSMISSIVE
8. CONNECTOR: COG/HEM-IC2
9. CUSTOMER No.:

TITLE: CD		深圳市华尔升电子有限公司 HARESAN ELECTRONICS CO., LIMITED TEL: 86-755-28033960 FAX: 86-755-28033850	
Draw: XQC	MODEL: HEM6448-01B	DWG NO: C-02	
Chk:	UNIT: mm	GENERAL TOL: ±0.2	
Appv:	SCALE:	SHEET NO: 1/1	