

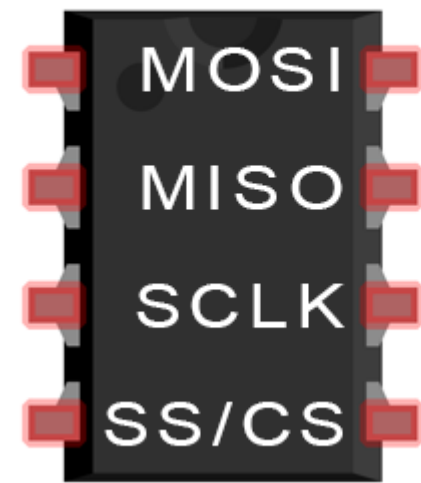



SPI (*Serial Parallel Interface*)


Master

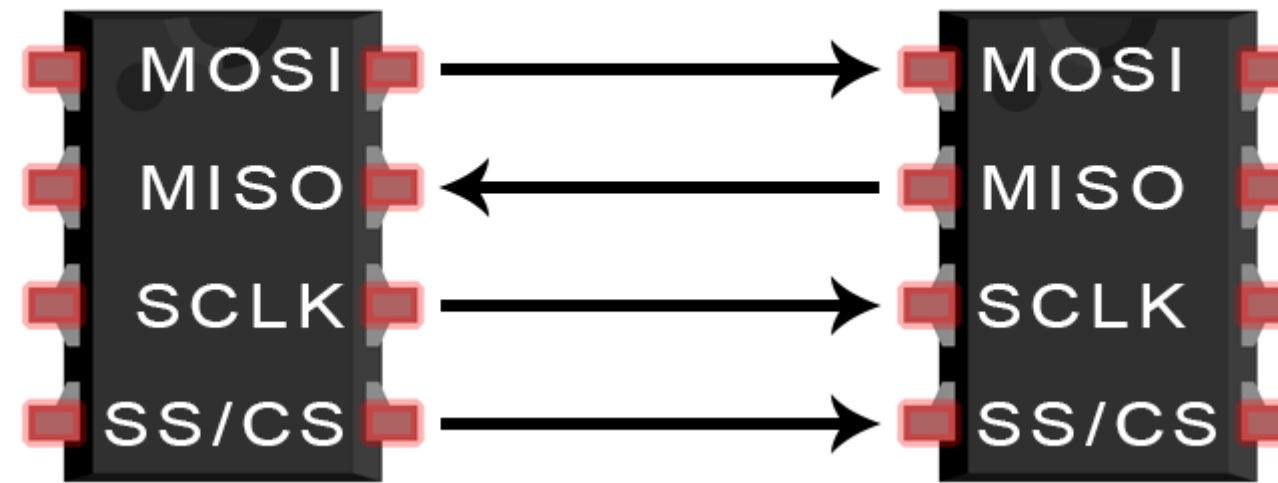

Slave

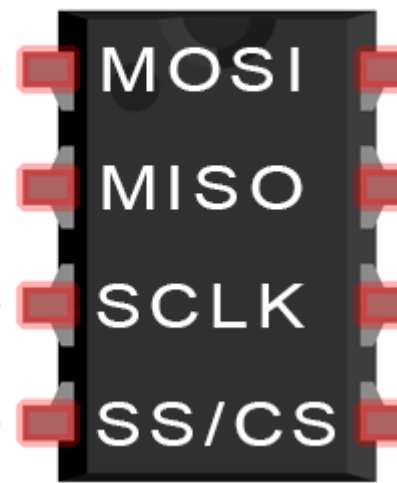

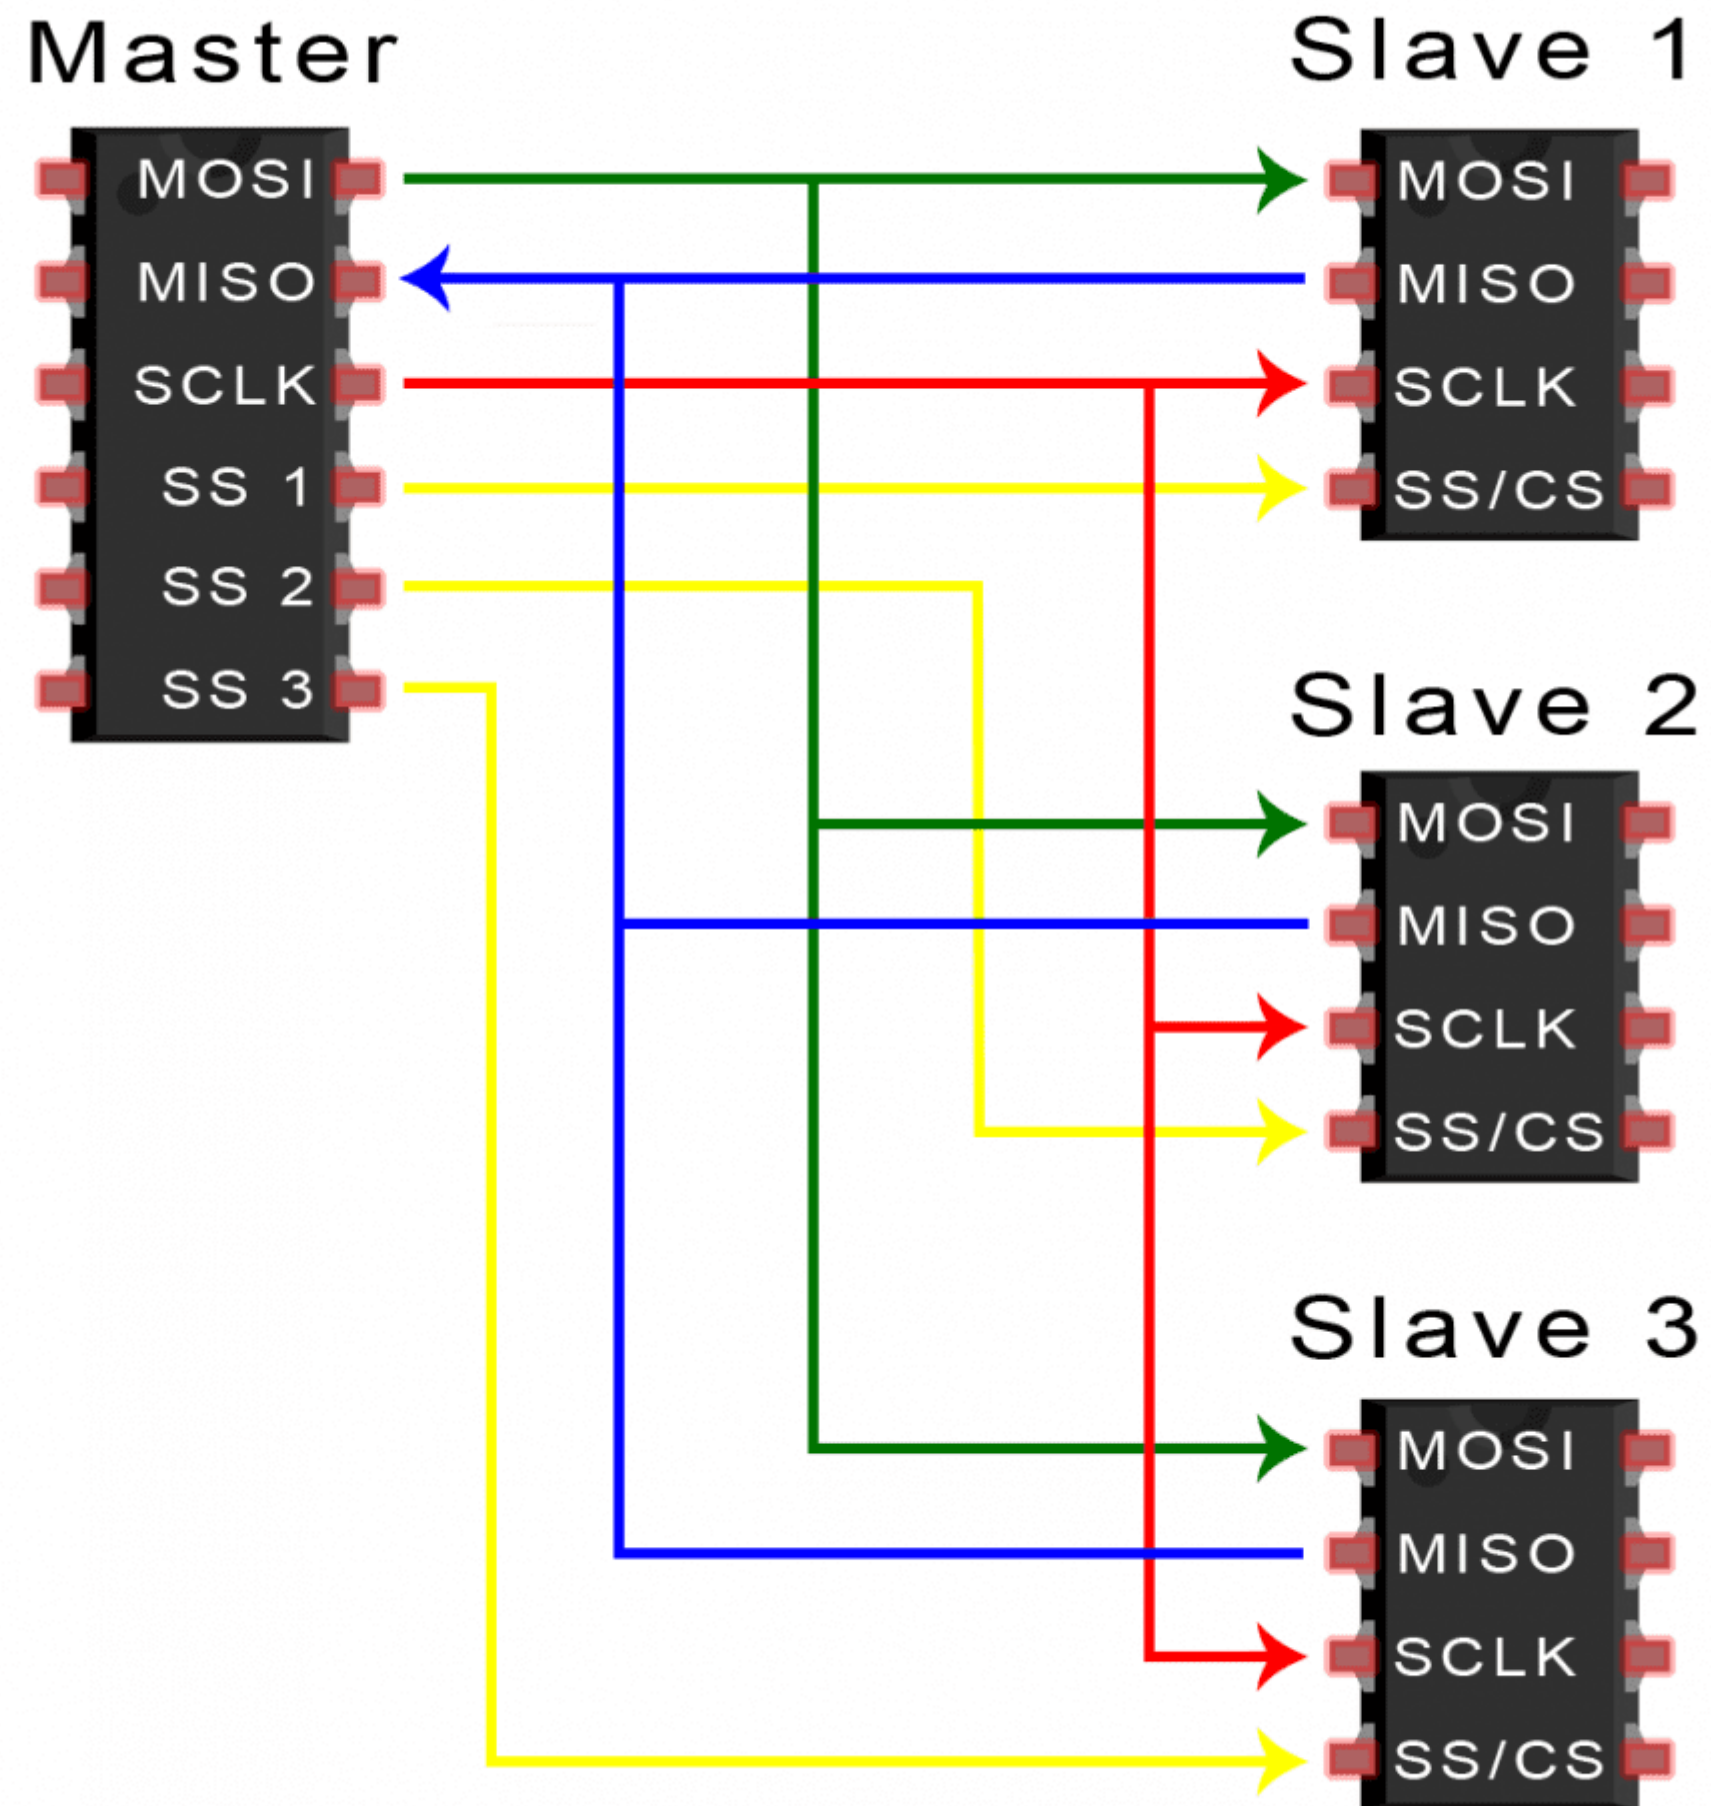

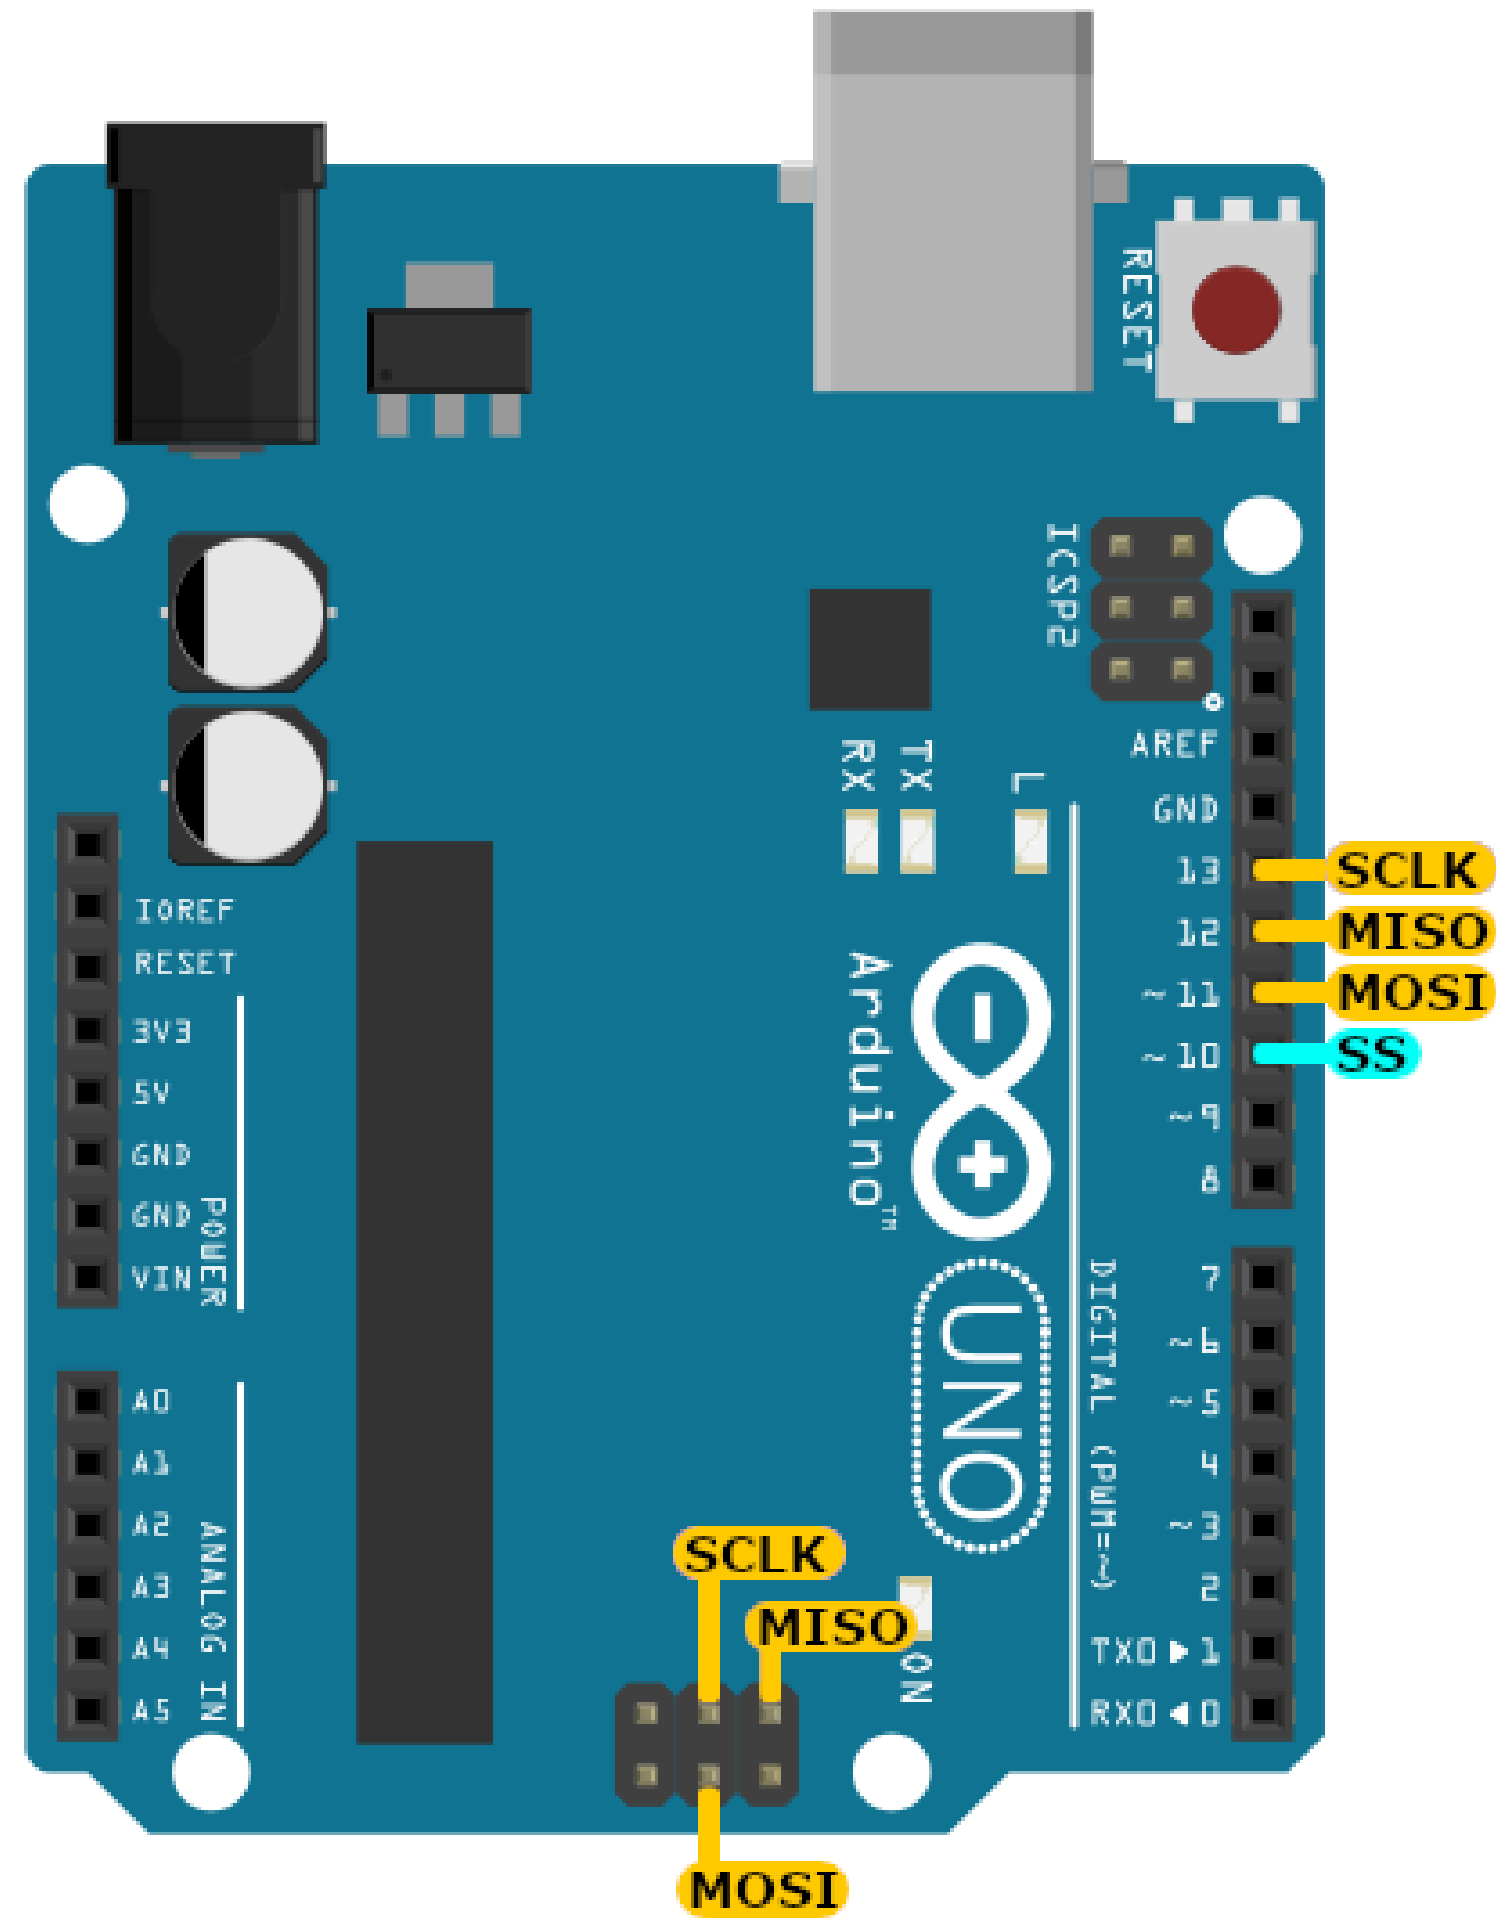

I_ORef: 5V

V_{in}: 7-12V DC max.

Serial: Serial is attached to pins 0 and 1, and to the USB-Serial microcontroller on board.

The Uno has a second microcontroller on board to handle USB-to-serial communications. This is the ICSP header for that microcontroller.

