

SMART DISPLAY MODULE SPECIFICATION

| 4.3 Inch Smart Display with TOUCH | |
|-----------------------------------|--------------------|
| Model: | UEDX80480043E-WB-A |
| Version: | V3.1 |
| Date: | 2024-08-02 |

Customer Confirmation

| Approved by | Notes |
|-------------|-------|
| | |

REVISION HISTORY

| Revision | Date | Contents of Revision Change | Remark |
|----------|----------|--|--------|
| V1.0 | 20240611 | Preliminary release | |
| V2.0 | 20240628 | Change to English version | |
| V2.1 | 20240709 | Change header | |
| V2.2 | 20240713 | Updated mechanical drawing | |
| V3.0 | 20240723 | Add schematic | |
| V3.1 | 20240802 | Add schematic, environment configuration and SDK links | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

TABLE of CONTENTS

| | |
|--|-----------|
| 1. INTRODUCTION | 4 |
| 1.1 Features | 4 |
| 1.2 Appearance picture | 5 |
| 2. PRODUCT INFORMATION | 6 |
| 2.1 Interface Description | 6 |
| 2.2 Display Information | 8 |
| 2.3 Voltage & Current | 8 |
| 2.4 Reliability Test | 9 |
| 2.5 Related software | 9 |
| 3. MECHANICAL DRAWING | 10 |
| 4. SCHEMATIC | 10 |
| 5. RELATED DOWNLOADS | 12 |
| 5.1 Arduino relevant information | 12 |
| 5.2 IDF relevant information | 12 |

1. Introduction

1.1 Features

Brief Info:

- 1) Two buttons: a reset button and a boot button.
- 2) Backup IO: download ports and multiple IO leads to use on both sides of the periphery.
- 3) Power: DC 5V, 300mA

System

- 1) OS: RTOS
- 2) CPU: ESP32-S3 240Mhz
- 3) RAM: 8MB
- 4) Flash: 16MB
- 5) Interface: UART/USB
- 6) Support 2.4GHz Wi-Fi、 BLE 5、 BLE Mesh



Display

- 1) Size: 4.3 Inch
- 2) Resolution: 800 *480
- 3) Mode: IPS
- 4) Brightness: 300 cd/m²
- 5) Touch: CTP

Other

- 1) Operation Temperature: -20~70°C
- 2) Storage Temperature: -30~80°C

1.2 Appearance picture

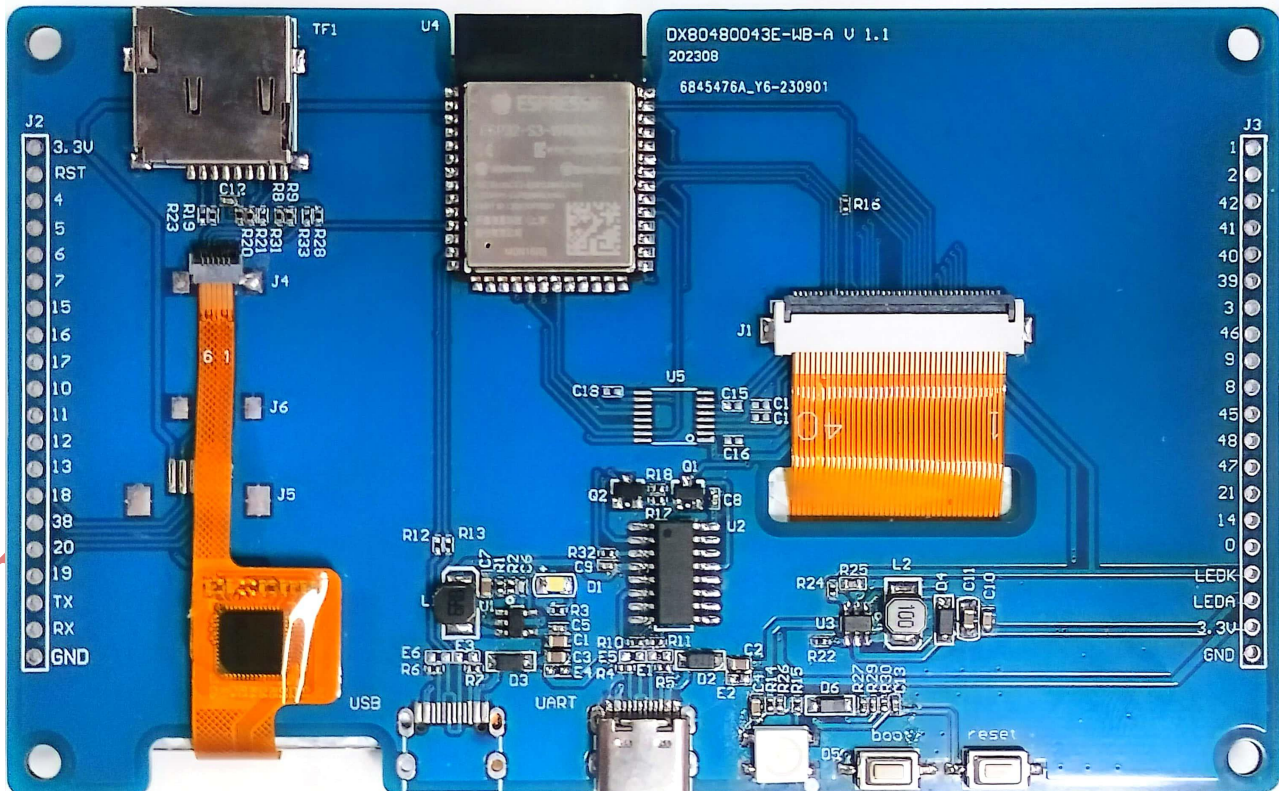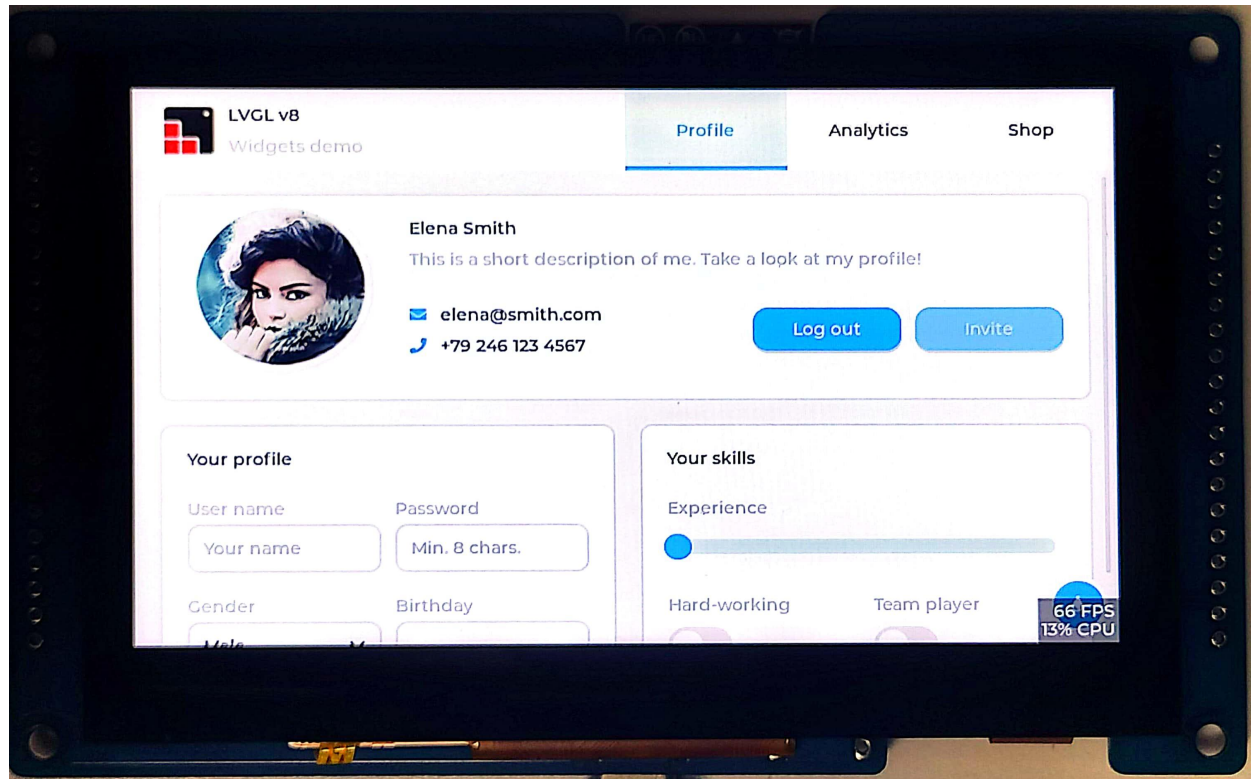


2. Product information

2.1 Interface Description

| Pin NO. | Symbol | Description | Voltage Range | Current Occupancy |
|---------|--------|--|---------------|--|
| 1 | 3.3V | Power 3.3V | 3.3V | Power 3.3V |
| 2 | RST | High: on, enables the chip Low: off, the chip powers off. Note: Do not leave the EN pin floating | 0-3.3V | Note: Do not leave the EN pin floating |
| 3 | 4 | RTC_GPIO4, GPIO4, TOUCH4, ADC1_CH3 | 0-3.3V | GPIO4 |
| 4 | 5 | RTC_GPIO5, GPIO5, TOUCH5, ADC1_CH4 | 0-3.3V | GPIO5 |
| 5 | 6 | RTC_GPIO6, GPIO6, TOUCH6, ADC1_CH5 | 0-3.3V | GPIO6 |
| 6 | 7 | RTC_GPIO7, GPIO7, TOUCH7, ADC1_CH6 | 0-3.3V | GPIO7 |
| 7 | 15 | RTC_GPIO15, GPIO15, U0RTS, ADC2_CH4, XTAL_32K_P | 0-3.3V | GPIO15 |
| 8 | 16 | RTC_GPIO16, GPIO16, U0CTS, ADC2_CH5, XTAL_32K_N | 0-3.3V | GPIO16 |
| 9 | 17 | RTC_GPIO17, GPIO17, U1TXD, ADC2_CH6 | 0-3.3V | GPIO17 |
| 10 | 10 | RTC_GPIO10, GPIO10, TOUCH10, ADC1_CH9, FSPICS0, FSPIIO4, SUBSPICS0 | 0-3.3V | SUBSPICS0 |
| 11 | 11 | RTC_GPIO11, GPIO11, TOUCH11, ADC2_CH0, FSPID, FSPIIO5, SUBSPID | 0-3.3V | GPIO11 |
| 12 | 12 | RTC_GPIO12, GPIO12, TOUCH12, ADC2_CH1, FSPICLK, FSPIIO6, SUBSPICLK | 0-3.3V | SUBSPICLK |
| 13 | 13 | RTC_GPIO13, GPIO13, TOUCH13, ADC2_CH2, FSPIQ, FSPIIO7, SUBSPIQ | 0-3.3V | GPIO13 |
| 14 | 18 | RTC_GPIO18, GPIO18, U1RXD, ADC2_CH7, CLK_OUT3 | 0-3.3V | GPIO18 |
| 15 | 38 | GPIO38, FSPIWP, SUBSPIWP | 0-3.3V | GPIO38 |
| 16 | 20 | RTC_GPIO20, GPIO20, U1CTS, ADC2_CH9, CLK_OUT1, USB_D+ | 0-3.3V | USB_D+ |
| 17 | 19 | RTC_GPIO19, GPIO19, U1RTS, ADC2_CH8, CLK_OUT2, USB_D- | 0-3.3V | USB_D- |
| 18 | TX | U0TXD, GPIO43, CLK_OUT1 | 0-3.3V | U0TXD |
| 19 | RX | U0RXD, GPIO44, CLK_OUT2 | 0-3.3V | U0RXD |
| 20 | GND | Grounds | 0V | Grounds |

The following picture shows the pins with 20 pind spacing between 2.54mm

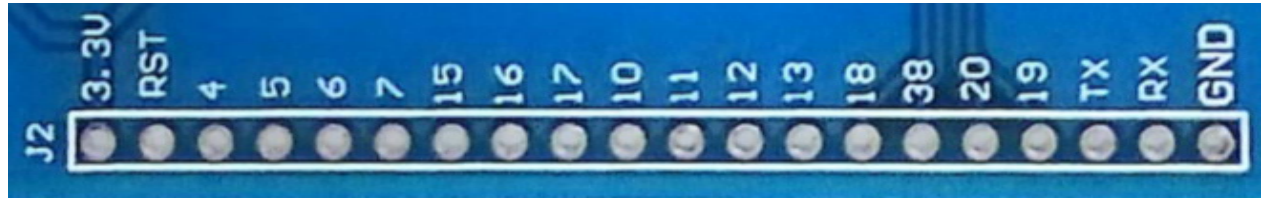

| Pin NO. | Symbol | Description | Voltage Range | Current Occupancy |
|---------|--------|--|---------------|-------------------|
| 1 | 1 | RTC_GPIO1, GPIO1, TOUCH1, ADC1_CH0 | 0-3.3V | GPIO1 |
| 2 | 2 | RTC_GPIO2, GPIO2, TOUCH2, ADC1_CH1 | 0-3.3V | GPIO2 |
| 3 | 42 | MTMS, GPIO42 | 0-3.3V | GPIO42 |
| 4 | 41 | MTDI, GPIO41, CLK_OUT1 | 0-3.3V | GPIO41 |
| 5 | 40 | MTDO, GPIO40, CLK_OUT2 | 0-3.3V | GPIO40 |
| 6 | 39 | MTCK, GPIO39, CLK_OUT3, SUBSPICS1 | 0-3.3V | GPIO39 |
| 7 | 3 | RTC_GPIO3, GPIO3, TOUCH3, ADC1_CH2 | 0-3.3V | GPIO3 |
| 8 | 46 | GPIO46 | 0-3.3V | GPIO46 |
| 9 | 9 | RTC_GPIO9, GPIO9, TOUCH9, ADC1_CH8, FSPIHD, SUBSPIHD | 0-3.3V | GPIO9 |
| 10 | 8 | RTC_GPIO8, GPIO8, TOUCH8, ADC1_CH7, SUBSPICS1 | 0-3.3V | GPIO8 |
| 11 | 45 | GPIO45 | 0-3.3V | GPIO45 |
| 12 | 48 | SPICLK_N_DIFF, GPIO48, SUBSPICLK_N_DIFF | 0-3.3V | GPIO48 |
| 13 | 47 | SPICLK_P_DIFF, GPIO47, SUBSPICLK_P_DIFF | 0-3.3V | GPIO47 |
| 14 | 21 | RTC_GPIO21, GPIO21 | 0-3.3V | GPIO21 |
| 15 | 14 | RTC_GPIO14, GPIO14, TOUCH14, ADC2_CH3, FSPIWP, FSPIDQS, SUBSPIWP | 0-3.3V | GPIO14 |
| 16 | 0 | RTC_GPIO0, GPIO0 | 0-3.3V | GPIO0 |
| 17 | LEDK | BL- | TDB | BL- |
| 18 | LEDA | BL+ | TDB | BL+ |
| 19 | 3.3V | Power 3.3V | 3.3V | Power 3.3V |
| 20 | GND | Grounds | 0V | Grounds |

The picture below shows a 1*21 needle row with a spacing of 2.54mm



The following picture shows the boot button on the left and the reset button on the right.



The following figure is the schematic diagram of USB. USB is used for power and download.



2.2 Display Information

| Item | Parameter | Description |
|------------|-----------------------|---------------|
| Color | 65K colors | R5G6B5 16bits |
| AA | 95.04(W)*53.86(H) | 4.3 inch |
| Resolution | 800*480 | Rectangle |
| Backlight | LED | 30000Hour Min |
| Brightness | 400 cd/m ² | |

2.3 Voltage & Current

| Item | Conditions | Min | Typ | Max | Unit |
|-------------------|-------------------------------------|-----|-----|-----|------|
| Power Voltage | DC | 4.0 | 5.0 | 5.5 | V |
| Operation Current | VCC= +5V, Maximum backlight current | 50 | 280 | 150 | mA |
| | VCC= +5V, backlight off | - | 150 | - | mA |

Recommended power supply: 5V 1A DC


2.4 Reliability Test

| Item | Conditions | Min | Typ | Max | Unit |
|---------------------|---------------------|----------------------------|-----|-----|------|
| Working Temperature | 60%RH at 5V voltage | -20 | 25 | 70 | C |
| Storage Temperature | --- | -30 | 25 | 85 | C |
| Working Humidity | 25°C | 10% | 60% | 90% | RH |
| ESD | --- | Contact: ±4KV Air: ±8KV | | | KV |


2.5 Related software

| Software name | Version | Software associated configuration | Development environment configuration link |
|---------------|----------------|--|---|
| Arduino IDE | 2.0.17 (esp32) | <ol style="list-style-type: none"> Board: ESP32S3 Dev Module CPU Frequency: 240MHz (WiFi) Flash Frequency: NO Flash Mode: QIO 80MHz Flash Size: 16MB (128Mb) Partition Scheme: Default 4MB with spiffs (1.2MB APP/1.5MB SPIFFS) PSRAM: OPI PSRAM Programmer: Esptool | ESP32-Arduino config (github.com) |
| ESP-IDF | 5.1.1 5.2.2 | Once configured, no configuration is required (If you have any problem with the configuration, please contact us, we will help you) | ESP-IDF config (github.com) |

3. MECHANICAL DRAWING

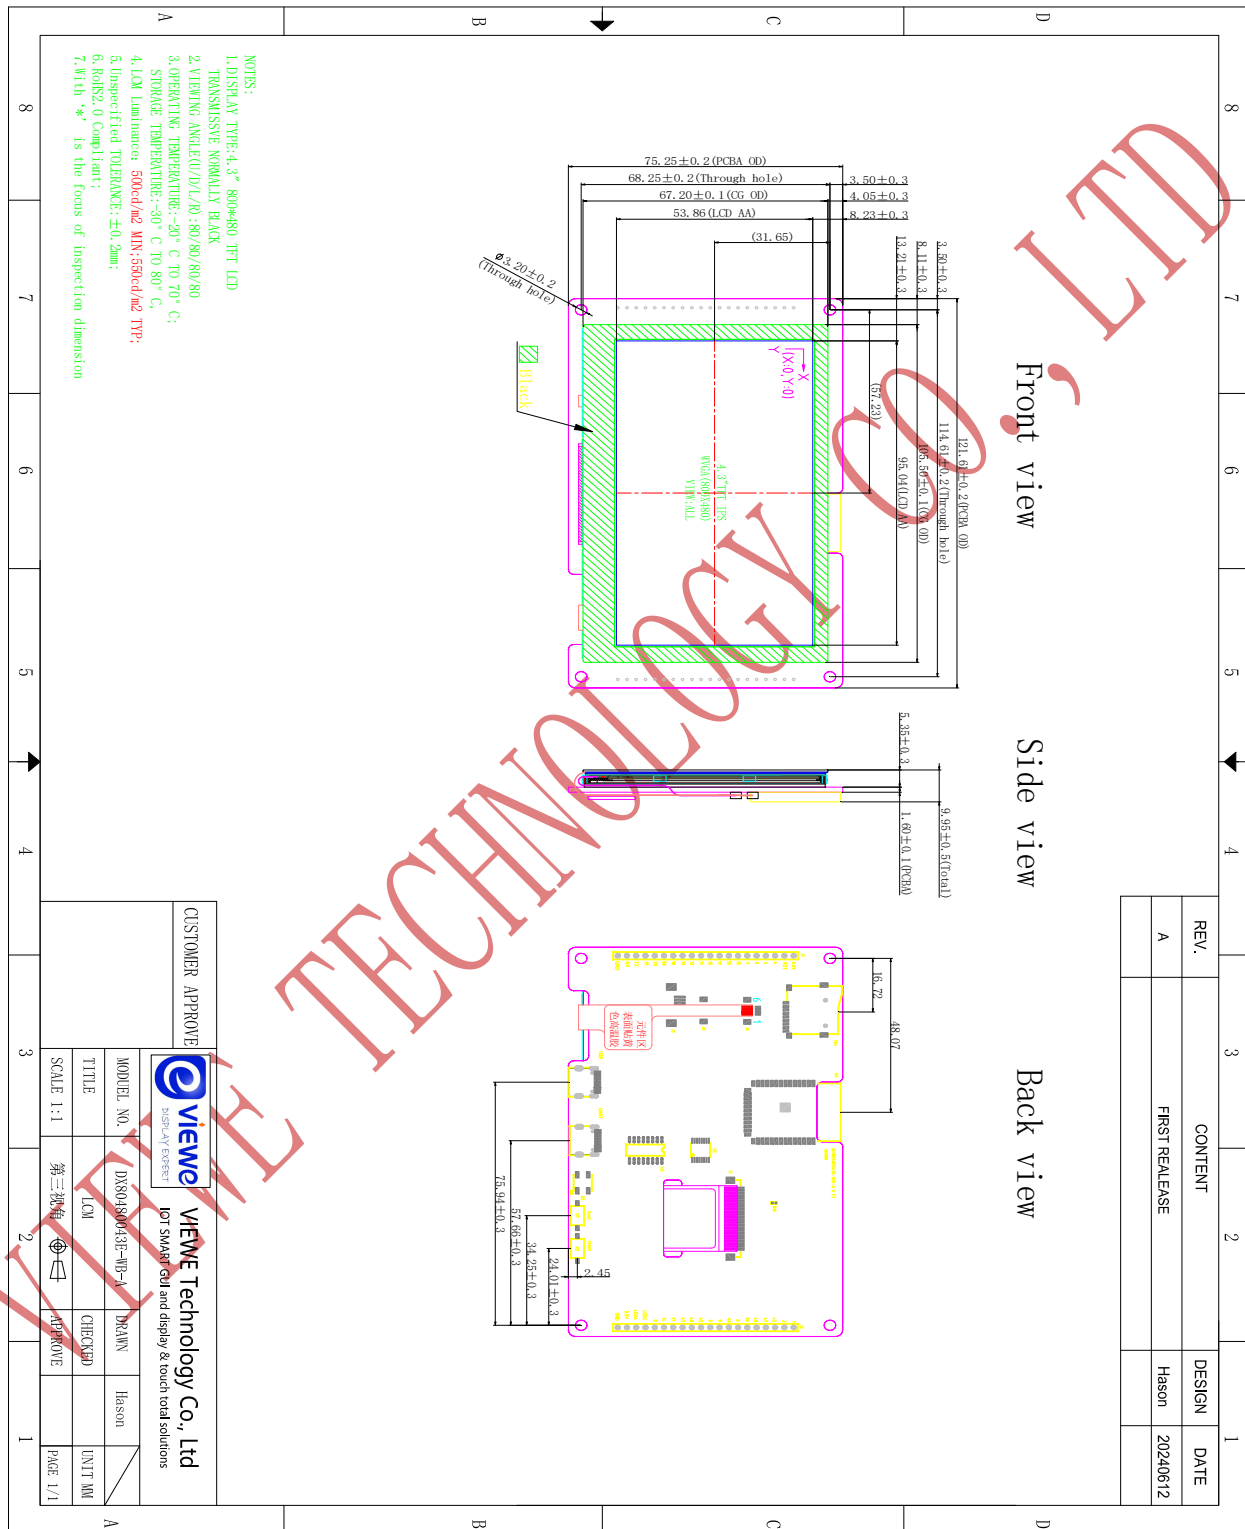

4. Schematic

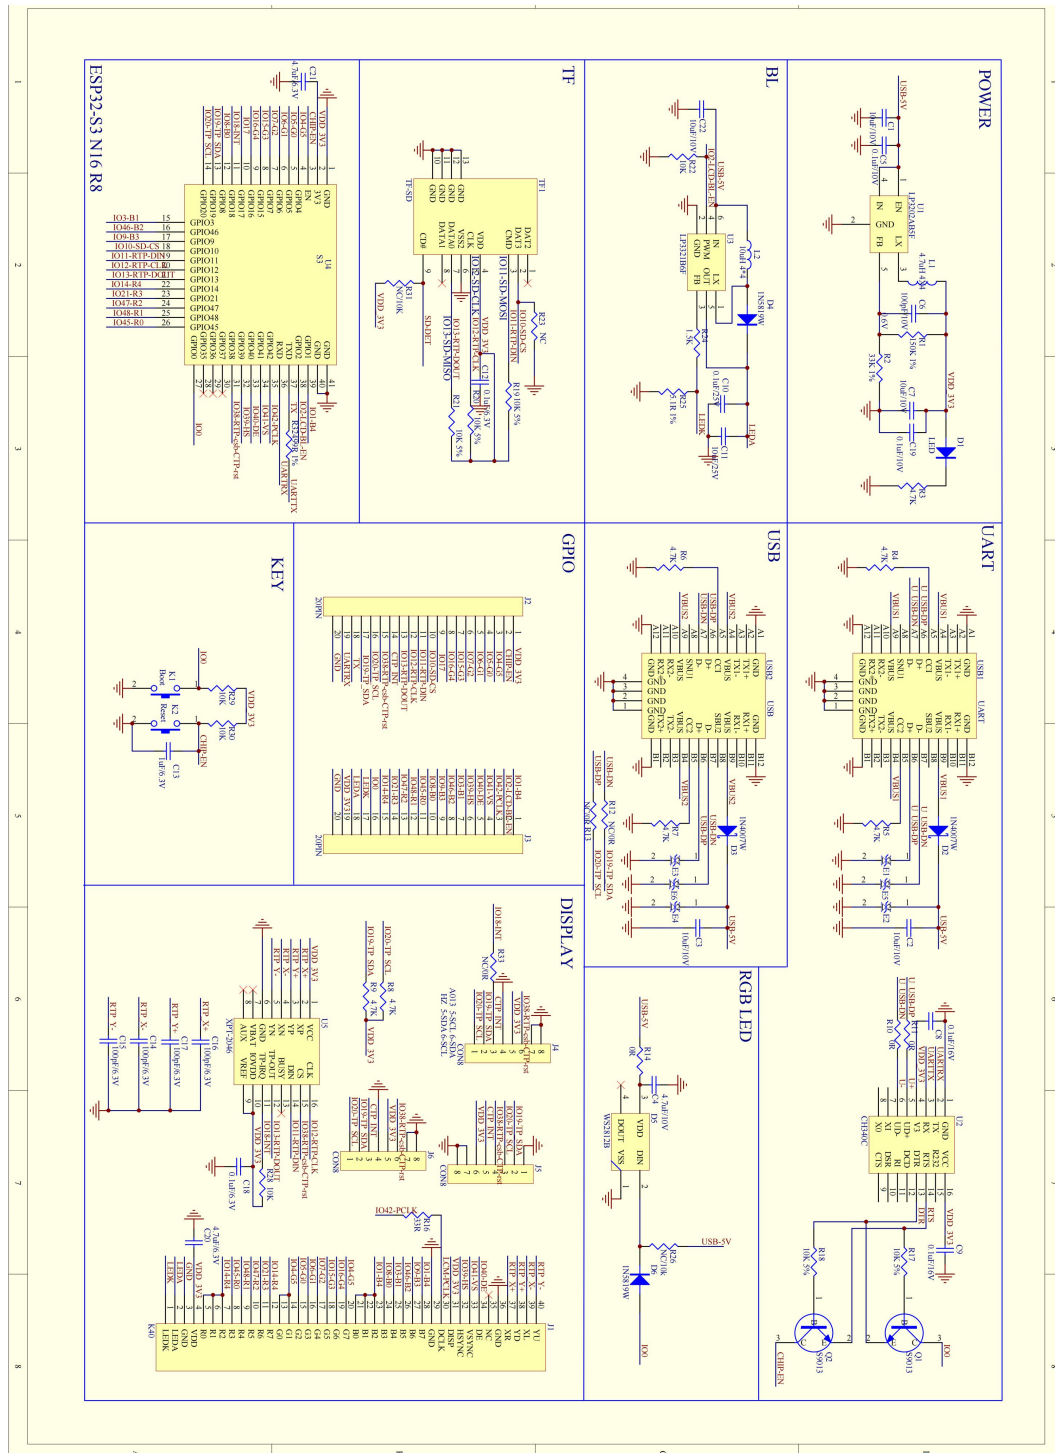

5. Related downloads

5.1 Arduino relevant information

[ESP32-Arduino/examples/UEDX80480043E-WB-A-Arduino-SDK at main • VIEWESMART/ESP32-Arduino \(github.com\)](#)

5.2 IDF relevant information

[ESP32-IDF/examples/4.3inch/UEDX80480043E-WB-A-3touch-SDK at main • VIEWESMART/ESP32-IDF \(github.com\)](#)

VIEWE TECHNOLOGY CO., LTD