

# SMART DISPLAY MODULE SPECIFICATION

3.5 Inch Smart Display with TOUCH	
<b>Model:</b>	UEDX24320035E-WB-A
<b>Version:</b>	V1.2
<b>Date:</b>	2025-01-09

## Customer Confirmation

Approved by	Notes

## REVISION HISTORY

Revision	Date	Contents of Revision Change	Remark
V1.0	202401031	Preliminary release	
V1.1	20241118	Add more hardware details and link to specification	
V1.2	20250109	Update GitHub link	

## TABLE of CONTENTS

<b>1. INTRODUCTION .....</b>	<b>4</b>
1.1 Features .....	4
1.2 Appearance picture .....	5
<b>2. PRODUCT INFORMATION .....</b>	<b>6</b>
2.1 Interface Description .....	6
2.2 Display Information .....	10
2.3 Voltage & Current .....	10
2.4 Reliability Test .....	10
2.5 Related software .....	11
<b>3. MECHANICAL DRAWING .....</b>	<b>12</b>
<b>4. SCHEMATIC .....</b>	<b>13</b>
<b>5. RELATED DOWNLOADS .....</b>	<b>14</b>
5.1 Arduino and IDF relevant information .....	14
5.2 Libraries required for Arduino .....	14

# 1. Introduction

## 1.1 Features

### Brief Info:

- 1) Button control: one is the reset button, the other is the boot button.
- 2) Backup IO: download ports and multiple IO leads to use on both sides of the periphery.
- 3) Power: DC 5V, 200mA

### System

- 1) OS: RTOS
- 2) CPU: ESP32-S3 240Mhz
- 3) RAM: 8MB
- 4) Flash: 16MB
- 5) Interface: UART/USB
- 6) Support 2.4GHz Wi-Fi, BLE 5, BLE Mesh
- 7) Support Peripherals:  
GPIO, SPI, LCD interface, Camera interface, UART, I2C, I2S, remote control, pulse counter, LED PWM, full-speed USB 2.0 OTG, USB Serial/JTAG controller, MCPWM, SDIO host, GDMA, TWAI® controller (compatible with ISO 11898-1), ADC, touch sensor, temperature sensor, timers and watchdogs

For more information on ESP32-S3-WROOM-1, please refer to the following link: [datasheet\\_en.pdf](#)

### Display



- 1) Size: 3.5 Inch
- 2) Resolution: 240(W)\*320(H)
- 3) Mode: MCU 8/16BIT/SPI
- 4) Display mode: Normally Black
- 5) Driver IC: GC9307
- 6) Touch IC: CH32V003
- 7) Pixel Density: 119 PPI
- 8) Backlight Type: White LED
- 9) Brightness: 300 cd/m<sup>2</sup>

More information about Display can be found here: [Display Specification.pdf](#)

### Other

- 1) Operation Temperature: -20~70°C
- 2) Storage Temperature: -30~80°C

## 1.2 Appearance picture

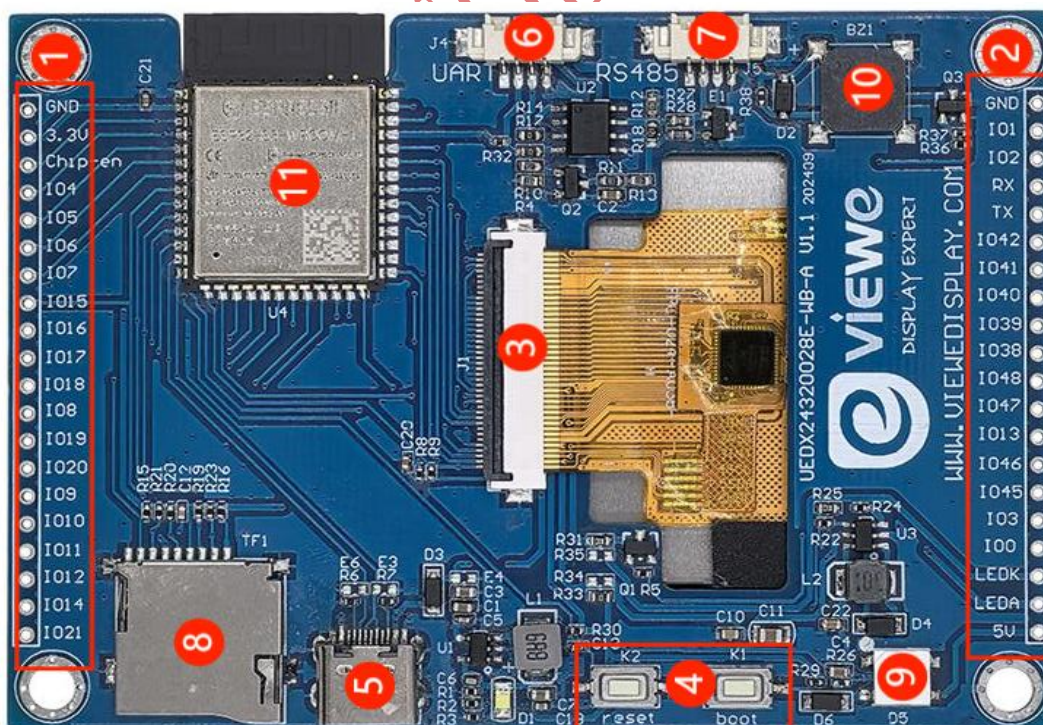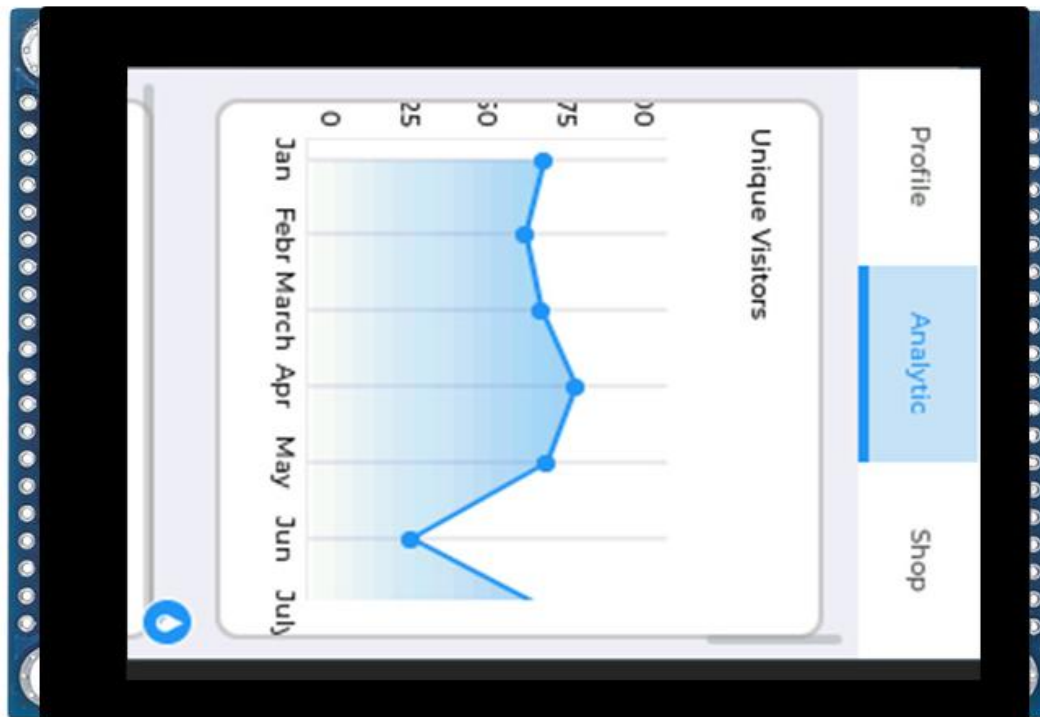

The hardware marked above will be described one by one by number in 2

## 2. Product information

### 2.1 Interface Description

#### (1) External GPIO:J3

Symbol	Description	Current Usage
GND	Grounds	GND
3.3V	Power 3.3V	Power 3.3V
CHIP-EN	High: on, enables the chip Low: off, the chip powers off. Note: Do not leave the EN pin floating	Note: Do not leave the EN pin floating
GPIO4	RTC_GPIO4, GPIO4, TOUCH4, ADC1_CH3	TP-INT
GPIO5	RTC_GPIO5, GPIO5, TOUCH5, ADC1_CH4	Not used
GPIO6	RTC_GPIO6, GPIO6, TOUCH6, ADC1_CH5	Not used
GPIO7	RTC_GPIO7, GPIO7, TOUCH7, ADC1_CH6	Not used
GPIO15	RTC_GPIO15, GPIO15, U0RTS, ADC2_CH4, XTAL_32K_P	SD-D2
GPIO16	RTC_GPIO16, GPIO16, U0CTS, ADC2_CH5, XTAL_32K_N	SD-MISO
GPIO17	RTC_GPIO17, GPIO17, U1TXD, ADC2_CH6	SD-MOSI
GPIO18	RTC_GPIO18, GPIO18, U1RXD, ADC2_CH7, CLK_OUT3	SD-D1
GPIO8	RTC_GPIO8, GPIO8, TOUCH8, ADC1_CH7, SUBSPICS1	Not used
GPIO19	RTC_GPIO19, GPIO19, U1RTS, ADC2_CH8, CLK_OUT2, USB_D-	USB-DN
GPIO20	RTC_GPIO20, GPIO20, U1CTS, ADC2_CH9, CLK_OUT1, USB_D+	USB-DP
GPIO9	RTC_GPIO9, GPIO9, TOUCH9, ADC1_CH8, FSPIHD, SUBSPIHD	Not used
GPIO10	RTC_GPIO10, GPIO10, TOUCH10, ADC1_CH9, FSPICS0, FSPIIO4, SUBSPICS0	Not used
GPIO11	RTC_GPIO11, GPIO11, TOUCH11, ADC2_CH0, FSPID, FSPIIO5, SUBSPID	Not used
GPIO12	RTC_GPIO12, GPIO12, TOUCH12, ADC2_CH1, FSPICLK, FSPIIO6, SUBSPICLK	Not used
GPIO14	RTC_GPIO14, GPIO14, TOUCH14, ADC2_CH3, FSPIWP, FSPIDQS, SUBSPIWP	SD-SCLK
GPIO21	RTC_GPIO21, GPIO21	SD-D3



## (2) External GPIO:J2

Symbol	Description	Current Usage
GND	Grounds	Grounds
GPIO1	RTC_GPIO1, GPIO1, TOUCH1, ADC1_CH0	TP-SDA
GPIO2	RTC_GPIO2, GPIO2, TOUCH2, ADC1_CH1	TP-RST
GPIO44	U0RXD, GPIO44, CLK_OUT2	UARTRX
GPIO43	U0TXD, GPIO43, CLK_OUT1	UARTTX
GPIO42	MTMS, GPIO42	LCD-CSB
GPIO41	MTDI, GPIO41, CLK_OUT1	LCD-RS
GPIO40	MTDO, GPIO40, CLK_OUT2	LCD-SCL
GPIO39	MTCK, GPIO39, CLK_OUT3, SUBSPICS1	LCD-RST
GPIO38	GPIO38, FSPIWP, SUBSPIWP	Not used
GPIO48	SPICLK_N_DIFF,GPIO48, SUBSPICLK_N_DIFF	LCD-M1
GPIO47	SPICLK_P_DIFF,GPIO47, SUBSPICLK_P_DIFF	LCD-M0
GPIO13	RTC_GPIO13, GPIO13, TOUCH13, ADC2_CH2, FSPIQ, FSPII07, SUBSPIQ	BL-EN
GPIO46	GPIO46	SDO
GPIO45	GPIO45	SDI
GPIO3	RTC_GPIO3, GPIO3, TOUCH3, ADC1_CH2	TP-SCL
GPIO0	RTC_GPIO0, GPIO0	RGB-LED
LEDK	BL-	BL-
LEDA	BL+	BL+
5V	Power 5V	5V

Note: (1) (2)

- A pin can be used for other purposes when it is not used at the same time
- You can also use an external gpio to drive other interface types, such as SPI interface, MCU interface, MIPI interface, etc., without using the Display interface provided by us
- If the Display interface is used but the SD is not used, then the SD pins are freely usable.

## (3) Display Interface

Pin No.	Symbol	I/O	Description
1	XL/CTP-SCL	I	I2C clock signals for CTP; Option XL for RTP
2	YU/CTP-SDA	I	I2C data signal for CTP,Option YU for RTP

3	XR/CTP-RST	I	The signal will reset the CTP,Signal is active low, Option XR for RTP
4	YD/CTP-INT	I/O	Interrupt signals for CTP,Option YD for RTP
5	GND	P	Power Ground
6	IOVCC	P	Power supply for I/O system
7	VCI	P	Power supply for analog circuits
8	TE	O	Tearing effect signal is used to synchronize MCU to frame memory
9	SPI_CS/MCU_CS	I	Chip selection pin. Low-active
10	SPI_SCL/MCU_RS	I	Display data/command selection pin in MCU interface In SPI mode, this pin is used as SCL
11	SPI_RS/MCU_WR	I	Write enable in MCU parallel interface RS=1 display data or parameter;RS=0 register index / command
12	MCU_RD	I	Read enable in 8080 MCU parallel interface. Low-active.
13	SPI_SDA	I/O	Serial communication data input and output, internal pull low.
14	SPI_SDO	O	SPI interface output pin
15	RESET	I	The signal will reset the LCM, Signal is active low.
16	GND	P	Power Ground
17-32	DB0-DB15	I/O	data bus for MCU
33	LED-A	P	Power supply for backlight anode
34-36	LED-K	P	Power supply for backlight cathode
37	GND	P	Power Ground
38	IM0	I	The MCU interface mode select.
39	IM1	I	The MCU interface mode select.
40	IM2	I	The MCU interface mode select.

**The choice of IM is as follows: 1 means pull up, and 0 means pull down**

**IM2IM1IM0: 110-2.4inch 111-3.5inch 101-3.9/4.3inch**

**(4) button:**

The following picture shows the boot button on the left and the reset button on the right.

**(5) Power:**

The following figure is the schematic diagram of USB. USB is used for power and download.

**(6) UART:**

a hardware communication protocol that enables asynchronous serial communication between devices, allowing for the transmission and reception of data using two wires: one for transmitting (TX) and one for receiving (RX).

**(7) RS485:**

a standard for serial communication that allows for long-distance data transmission and multi-point connections, using differential signaling to improve noise immunity and enabling communication over distances up to 1,200 meters at speeds of up to 10 Mbps.



**(8) SD:**

A port or slot for inserting an SD card, usually for storing data

**(9) RGB LCD:**

Can emit red, green, blue three colors of light, and through different combinations to produce a variety of colors

**(10) Passive Buzzer:**

An external circuit is required to generate a driving signal (usually a square wave) to sound

**(11) Main Control Chip: ESP32S3**

Dual-core processor, up to 240MHz operating frequency

VIEWE TECHNOLOGY CO., LTD

## 2.2 Display Information

Item	Specification	Unit	Remark
Pixel Driving element	IPS TFT	-	
Screen Size	3.5	Inch	-
Resolution	240(W)*3(RGB)*320(H)	Dots	-
Interface	MCU 8/16BIT/SPI	-	-
Module Power Consumption	0.507	Watt	Typ.
Active Area	51.27(W)*68.36(H)	mm	Typ.
Pixel pitch (W*H)	0.213*0.213	mm	Typ.
Module Size (W*H*D)	65.31(W)*86.51(H)*3.39(D)	mm	Typ.
Luminance	300	cd/m <sup>2</sup>	Typ.
Viewing Direction	All	O'clock	-
Display Color	262K	Colors	18bits

## 2.3 Voltage & Current

Item	Conditions	Min	Typ	Max	Unit
Power Voltage	DC	4.0	5.0	5.5	V
Operation Current	VCC= +5V, Maximum backlight current	-	200	-	mA
	VCC= +5V,backlight off	-	100	-	mA
Recommended power supply:5V 1A DC					

## 2.4 Reliability Test

Item	Conditions	Min	Typ	Max	Unit
Working Temperature	60%RH at 5V voltage	-20	25	70	C
Storage Temperature	---	-30	25	80	C
Working Humidity	25°C	10%	60%	90%	RH
ESD	---	Contact: ±4KV Air: ±8KV			KV


## 2.5 Related software

Software name	Version	Software associated configuration	Development environment configuration link
Arduino IDE	esp32 (3.0.0-3.0.4)	<ol style="list-style-type: none"> <li>1. Board: ESP32S3 Dev Module</li> <li>2. CPU Frequency: 240MHz (WiFi)</li> <li>3. Flash Frequency: NO</li> <li>4. Flash Mode: QIO 80MHz</li> <li>5. Flash Size: 16MB (128Mb)</li> <li>6. Partition Scheme: Default 4MB with spiffs (1.2MB APP/1.5MB SPIFFS)</li> <li>7. PSRAM: OPI PSRAM</li> <li>8. Programmer: Esptool</li> </ol>	<a href="#">ESP32-Arduino config (github.com)</a>
ESP-IDF	5.1.1 5.2.2 5.3	Once configured, no configuration is required (If you have any problem with the configuration, please contact us, we will help you)	<a href="#">ESP-IDF config (github.com)</a>


VIEWE TECHNOLOGY

### 3. MECHANICAL DRAWING

### 3.1 Display

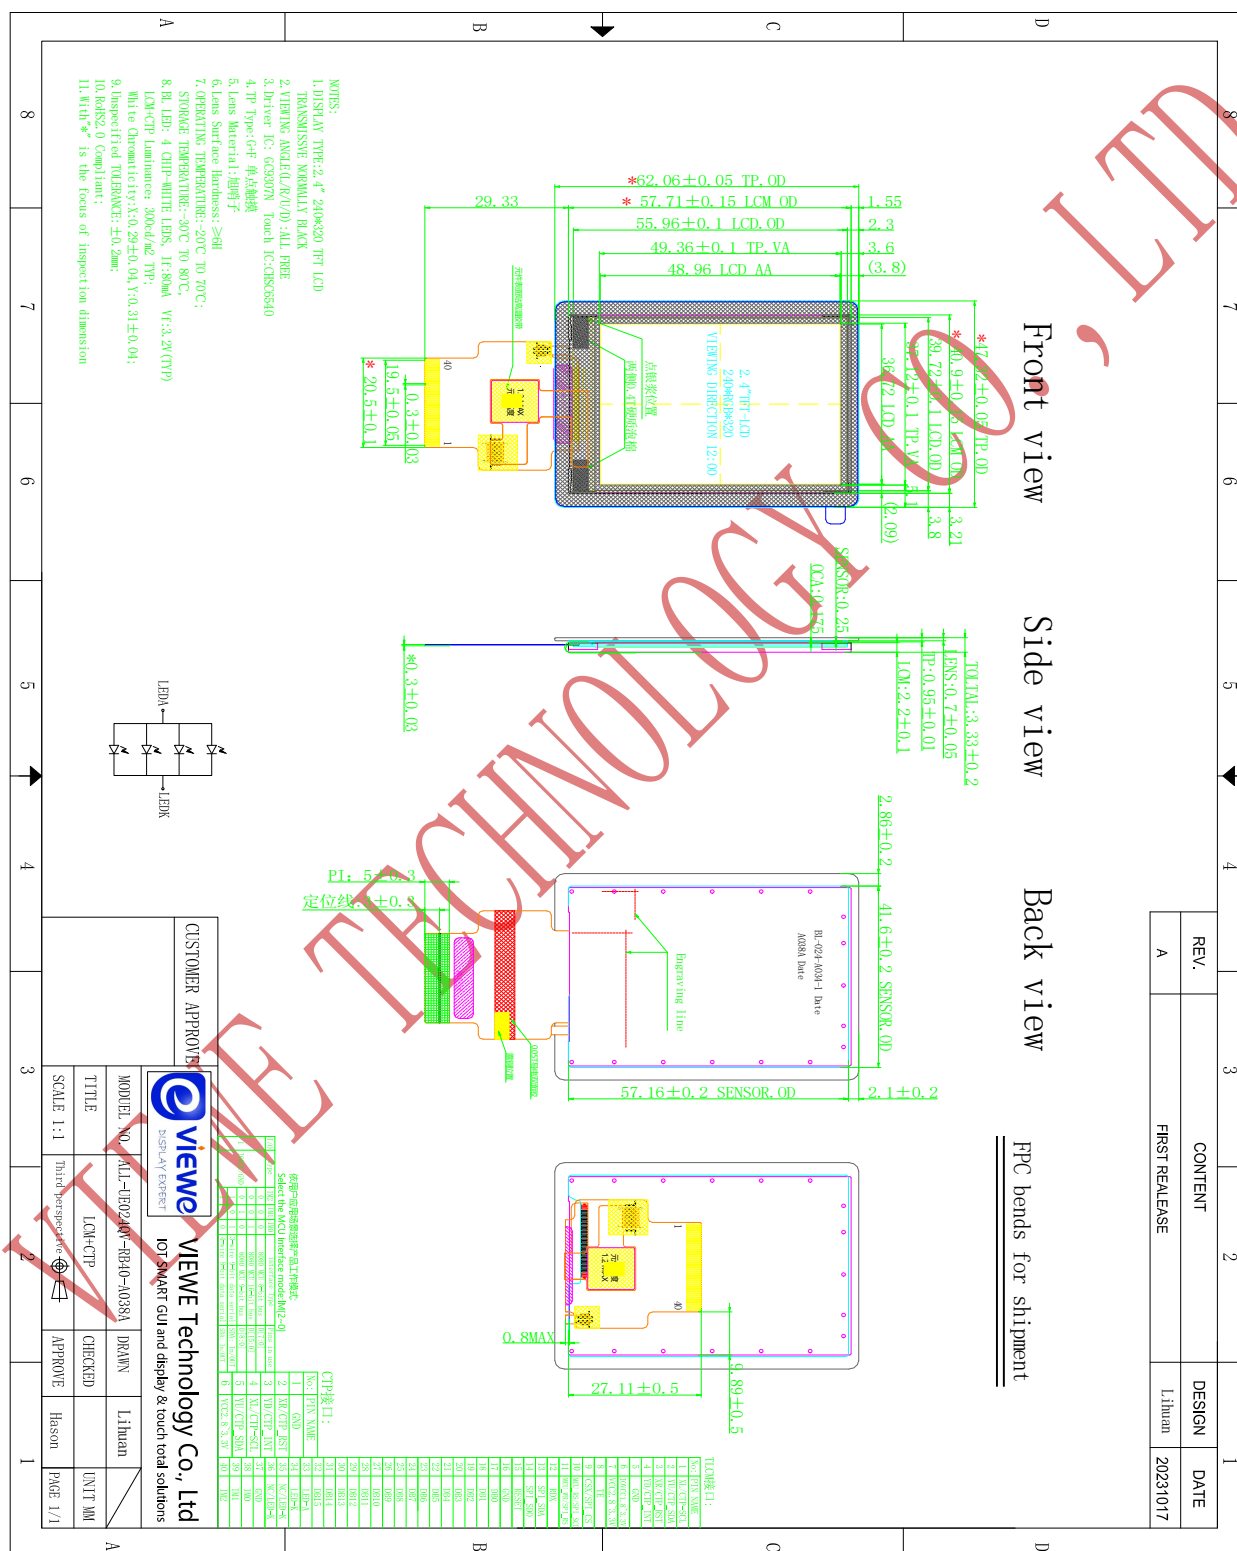

## 4. Schematic

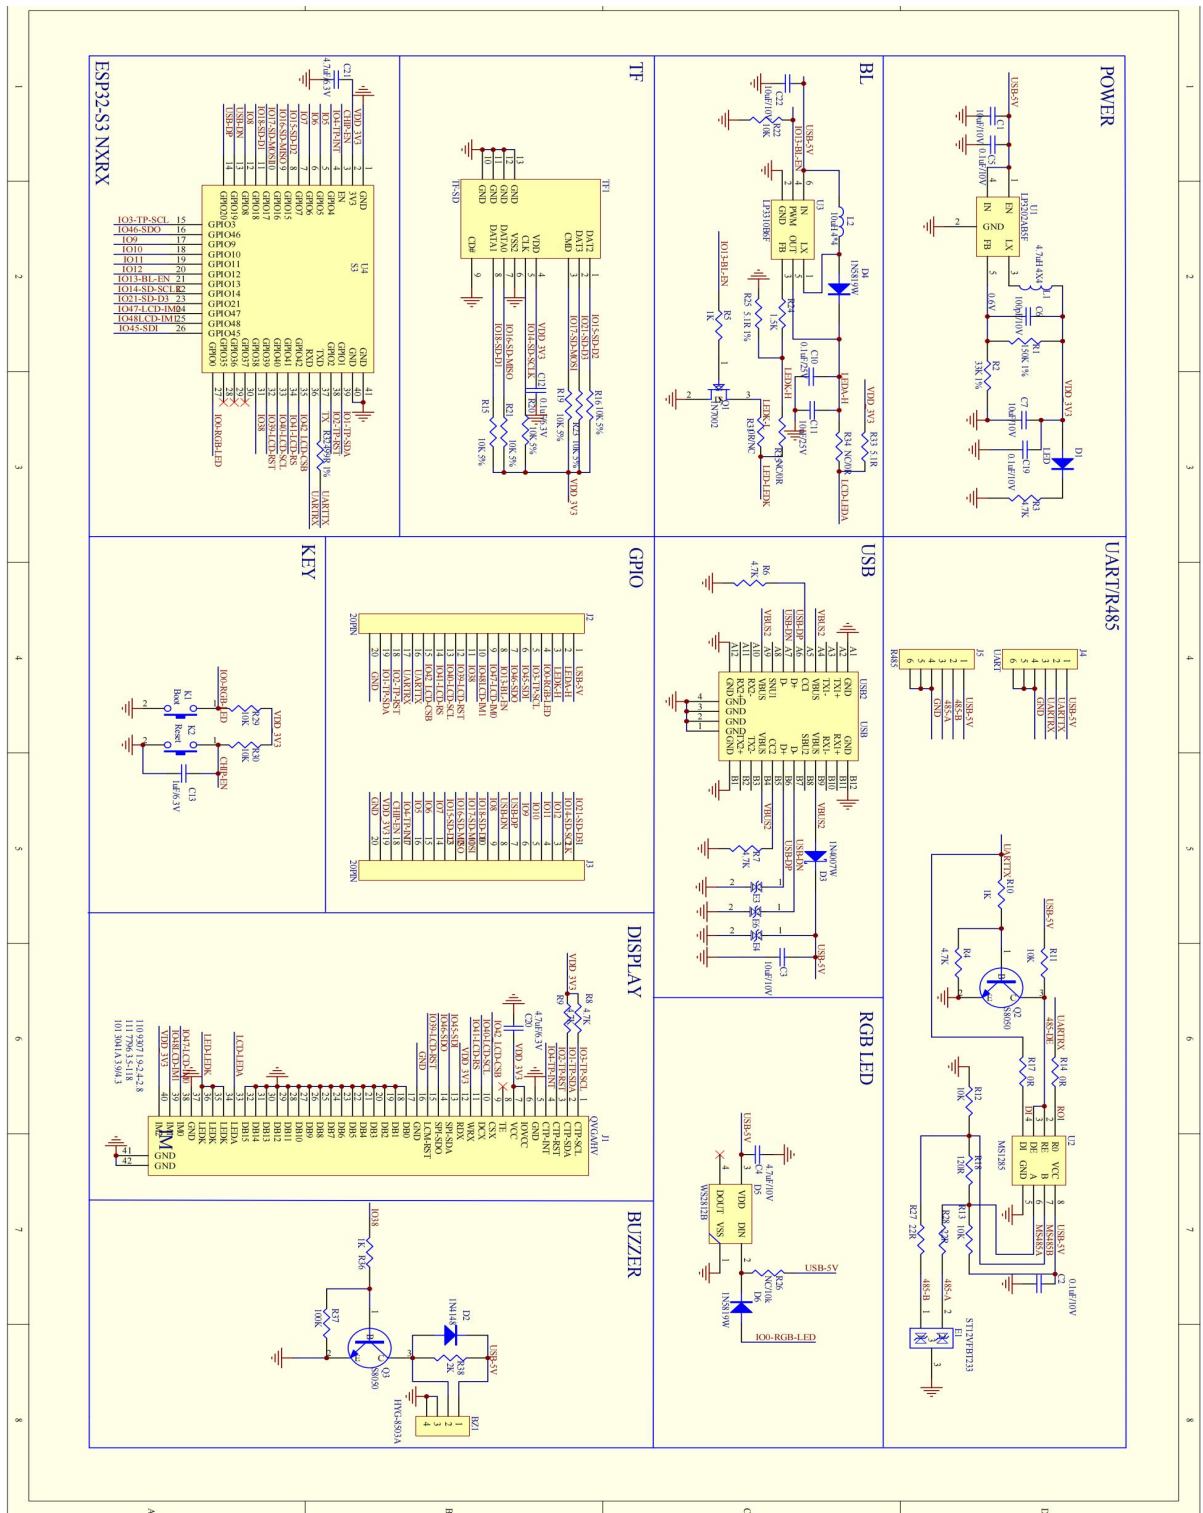

## 5. Related downloads

### 5.1 Arduino and IDF relevant information

[https://github.com/VIEWESMART/UEDX24320028ESP32-3.5inch-240\\_320-Touch-Display](https://github.com/VIEWESMART/UEDX24320028ESP32-3.5inch-240_320-Touch-Display)

### 5.2 Libraries required for Arduino

[https://github.com/VIEWESMART/UEDX24320028ESP32-3.5inch-240\\_320-Touch-Display/tree/main/Libraries](https://github.com/VIEWESMART/UEDX24320028ESP32-3.5inch-240_320-Touch-Display/tree/main/Libraries)

VIEWE TECHNOLOGY CO., LTD