


ALL IN ONE HOME INVERTER

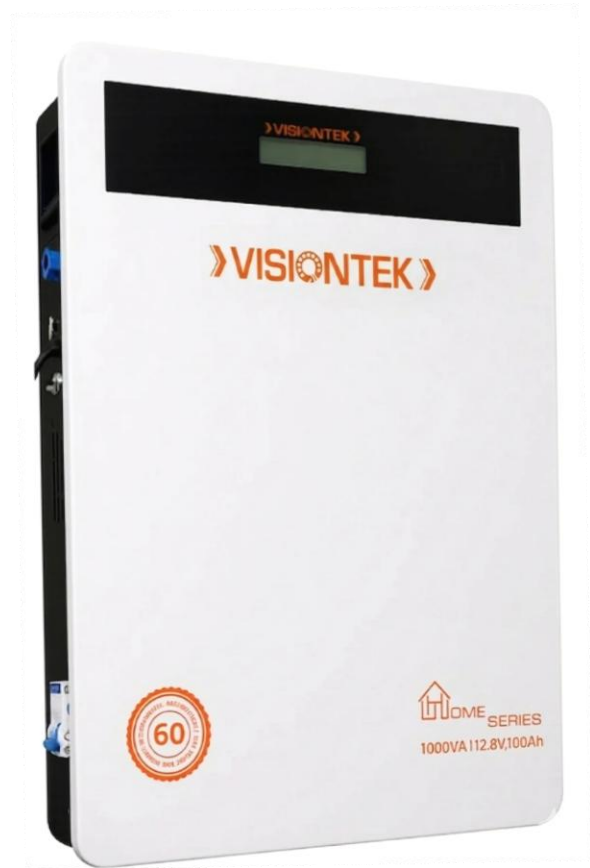

Dear Customer,

Thank you for choosing the **Visiontek All in one Home Inverter**. We truly appreciate your trust in our technology and your commitment to reliable, long-lasting power solutions.

Welcome to the Visiontek family—and thank you for choosing innovation that lasts ever. Your satisfaction is our top priority.

A Product from An ISO 9001: 2015 & ISO 14001: 2015 Certified company



Introduction

The **Visiontek All in one Home Inverter with inbuilt 12.8V LiFePO₄** battery is engineered to deliver reliable, long-lasting, and safe power for all your home. Designed for superior performance and durability, it offers **faster charging, higher efficiency, and longer lifespan**. With zero maintenance and consistent output, Visiontek All in one Home Inverter ensure **uninterrupted power** and peace of mind for years to come.

Technical Specifications

Model	All in one Home Inverter
Rated Power	1000VA
Input Voltage	1L/N/PE 230V _{AC}
Input Frequency	50Hz
Max. Output Power	750W ± 5%
Max. Input Current (I _{AC})	3.6A
Max. Charging Current	15A
Max. Output Load	750W ± 5%
Power Factor	0.8
Low Voltage Input	180 V _{AC}
High Voltage Input	270 V _{AC}
Battery Nominal Voltage	12.8 V _{DC}
Battery Nominal Capacity	100 Ah
Battery Max. Discharge Current	63 A _{DC}
Battery Full Charge Voltage	14.2 V _{DC}
Battery Discharge / Low Voltage	10.8 V _{DC}
Protections	High Temperature, Short Circuit, Over Load Protection, Over Current Protection.
Low Battery Indication	Yes

Mechanical Overview of the System

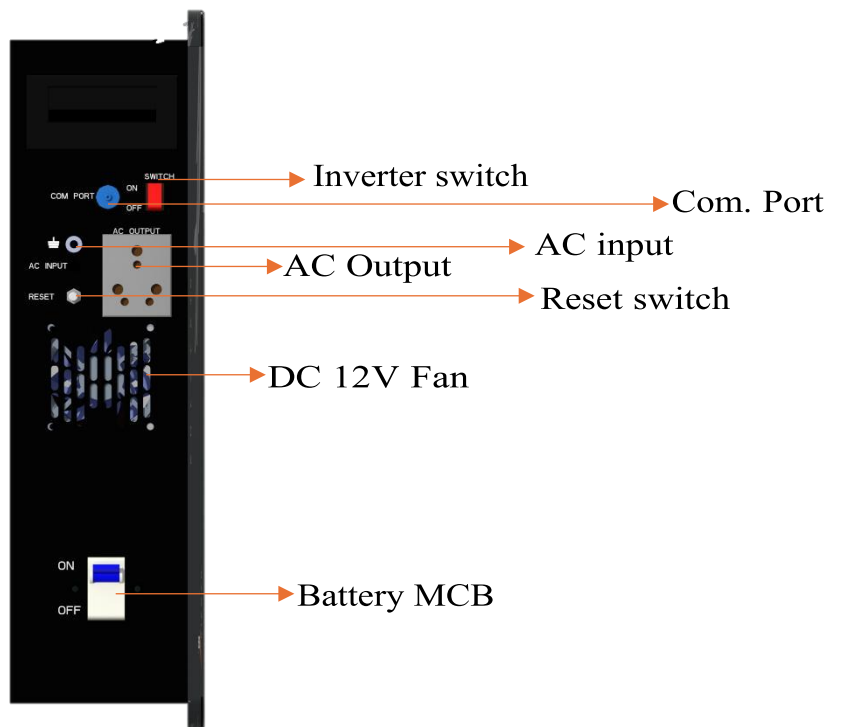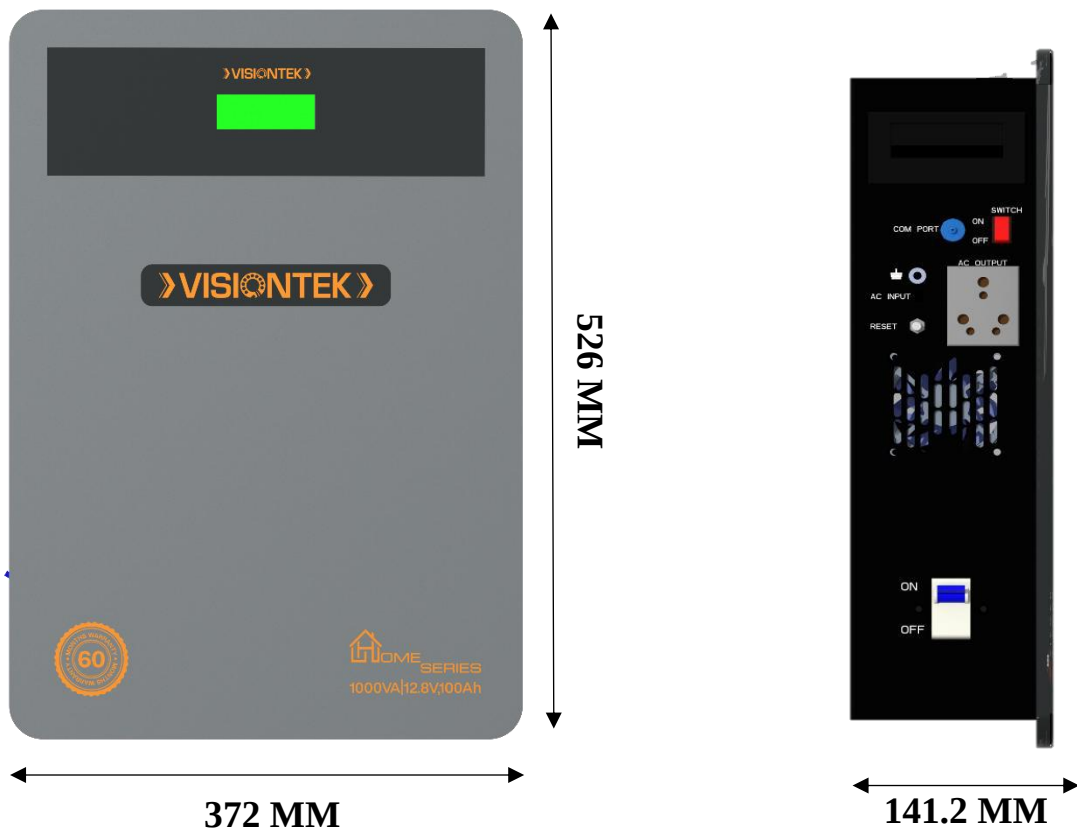

Installation

This system can only be installed by a technical person who have been trained in the power supply system and have sufficient knowledge regarding inverters.

The local safety regulations should be followed while installing the system. One must wear the protective equipment while installing the system.



Safety gloves



Safety goggles




Safety Shoes

Environmental Requirements

- Working temperature: 0-45°C.
- Free from direct contact of sunlight, water, dust and from flammable equipment
- The optimal ambient temperature should be 25°C To 35°C.

Installation & Integration Procedure:

- Install the system where there is no direct contact of sunlight/water
- M8 holes has to be drilled to the wall using the guiding fixture
- Mount the system to the wall
- Turn on the battery MCB
- Turn on the inverter switch
- Connect the load in the AC output port
- Check for any faults on the display (overload, error codes etc.)
- Run for one continuous charge & discharge cycle to check the system performance

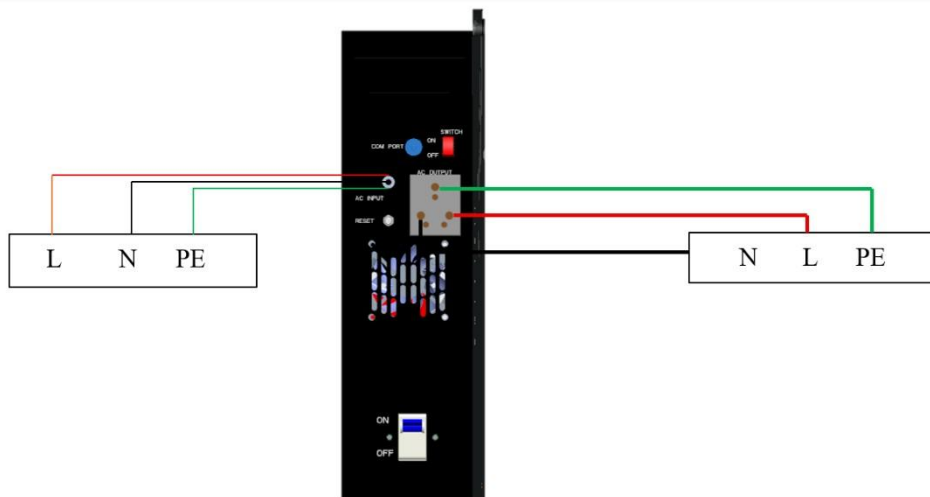

Reference wireframe diagram for AC mains input and AC output




Do's

- Ensure the system is installed in a dry place where there is no direct contact of sunlight and water
- Read the user manual carefully
- Take necessary precautions like wearing hand gloves, safety shoes while giving electrical connections
- Charge the battery frequently
- Do connect the grounding

Don'ts

- Don't install the battery where there is direct exposure of sunlight and water
- Avoid direct contact of touching AC supply, battery while in operation
- Don't overload
- Don't open the system
- Don't short circuit the input/output phase and neutral

Troubleshooting

Error	Description	Solution	Image
Battery low	LCD is displaying battery low warning	1. Turn on the mains supply	
Backup is not up to the mark	Intended backup time is not being achieved	1. Fully charge the battery 2. Check for loose contacts	
Overload	Overload indication on the LCD	Connect the load as per the rating of the inverter which is $\leq 800W$	
Over temperature protection	LCD is displaying over temperature protection fault status	Store the inverter at room temperature	
Short circuit protection	LCD is displaying short circuit protection fault status	Connect line and neutral wires as per the wireframe diagram	
Error message on LCD	System is displaying error message ID	Customer must reach out for technical support	

Note: All images are for reference purpose only. Original product may vary.

Warranty card

Model

S.no

Customer information

Name:

Mobile:

Invoice no:

Date of purchase:

Vendor information:

Name:

Signature & Stamp:

Mobile:

Date of purchase:

Warranty

- We provide standard warranty of 5 years from the date of purchase. Keep your physical warranty card and invoice safe.
- Warranty is applicable for the goods purchased from the authorised dealer also only for the goods having manufacturing defects.
- In case of replacement remaining warranty will be transferred to the replaced goods. No new warranty will be issued.

Warranty Exception clause

Any of the following situations will not be covered by our warranty policy:

- Damage incurred by nature/customer/any third party, Water ingress cases.
- Damage caused by faulty electrical systems, improper handling, servicing by unauthorized dealers/technicians, wilful abuse, destruction by fire, collision.
- Improper usage /additional fitment than specified by the manufacturer. Usage beyond the specification range.
- Breakage of container and cover found to have additives, dopes or anything other than inverter degradation.
- Defective parts must be returned to company within 7 working days because they are the property of company.
- Removal, obliteration (or) alteration of original barcode/QR code sticker.
- In case of any product model being discontinued by the company, company reserves the right to settle warranty with alternate/ equivalent product.
- Logistics cost for movement for repair of Home inverter from Client/Dealer to Visiontek service Centre or to plant under Client Scope and faulty products need to reach concerned location without any abuse/damaged conditions.
- Same Logistics for Movement of repaired or replacement of Home inverter from Visiontek Service Centre or Plant to client/Dealer Location under Visiontek Scope.



User Manual

Contact Address:

LINKWELL TELESYSTEMS PVT.LTD

B-45&46; Electronic Complex, Kushaiguda,
Hyderabad – 500062.
Telangana, INDIA.
Ph: 040-66388235

For Customer Care Contact:

Ph: 9966057222
Mail: care@visiontek.co.in

Regd Office:

LINKWELL TELESYSTEMS PVT LTD

1-11-252/1B, Behind Shopper's Stop
Begumpet, Hyderabad-500016.
Telangana, India.
Ph: 040-66388000
CIN No: U26205TG1993PTC015875

www.visiontek.co.in

55101521-0350