
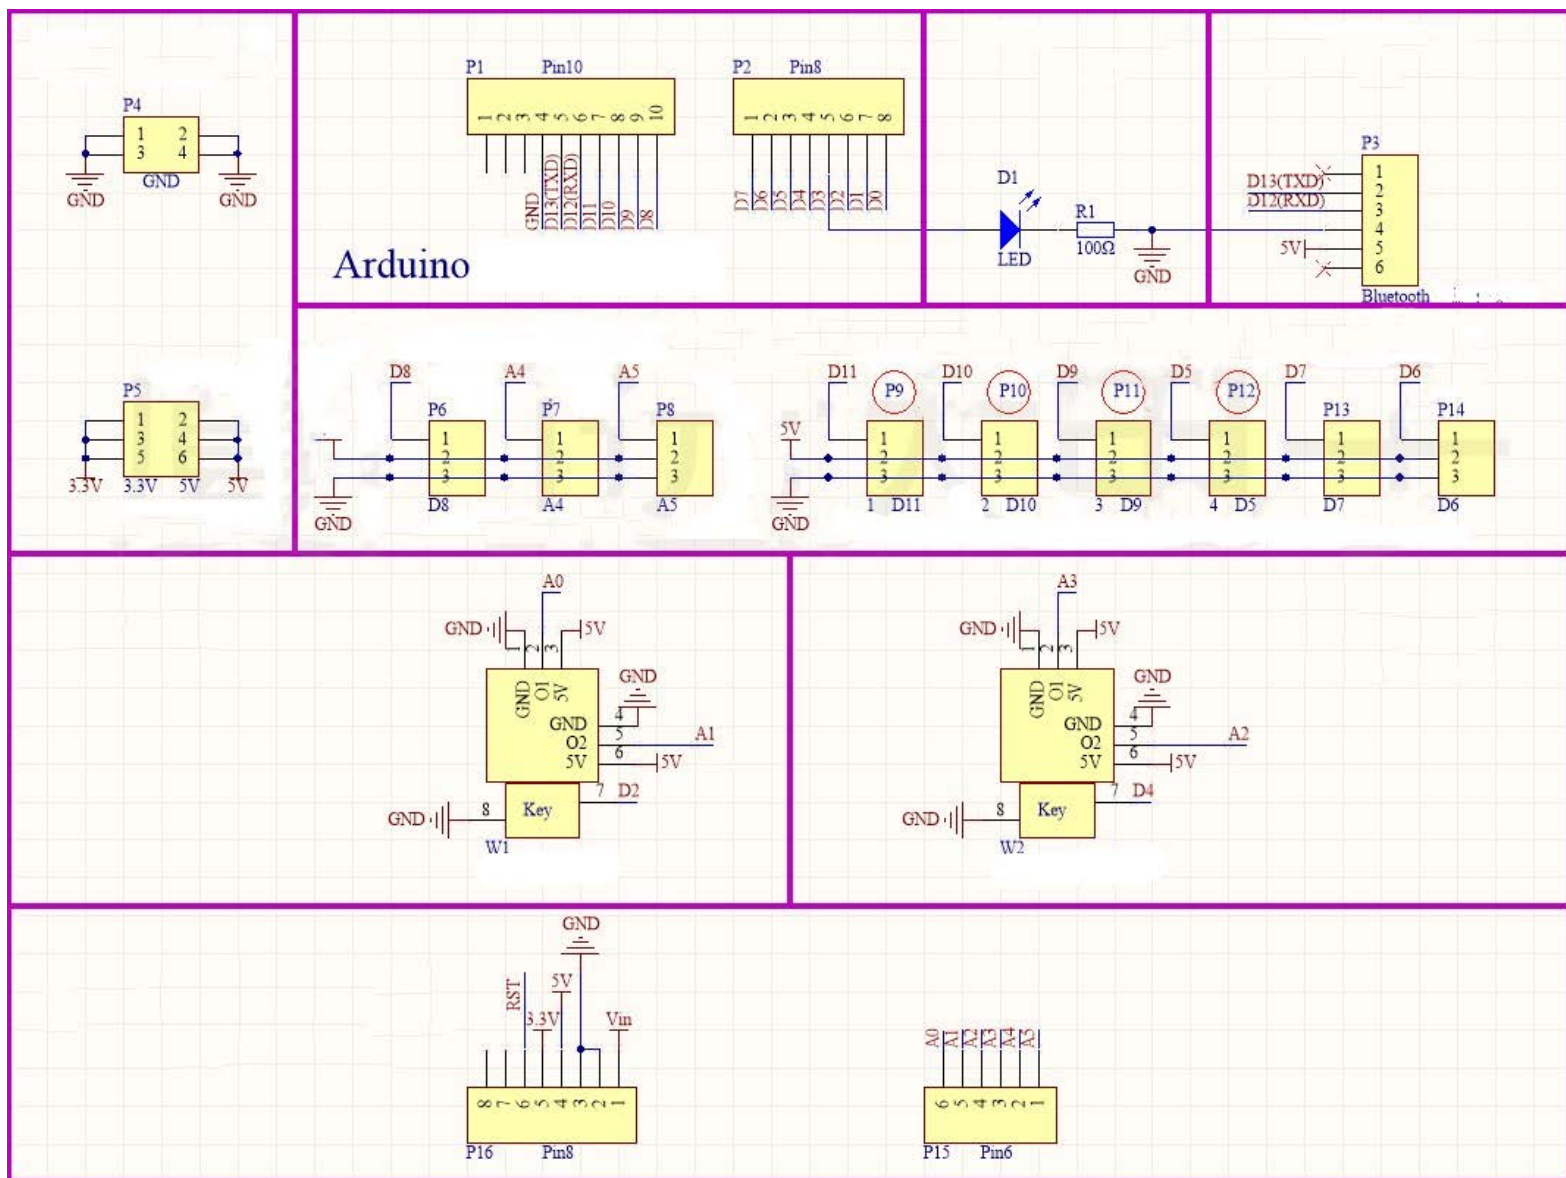


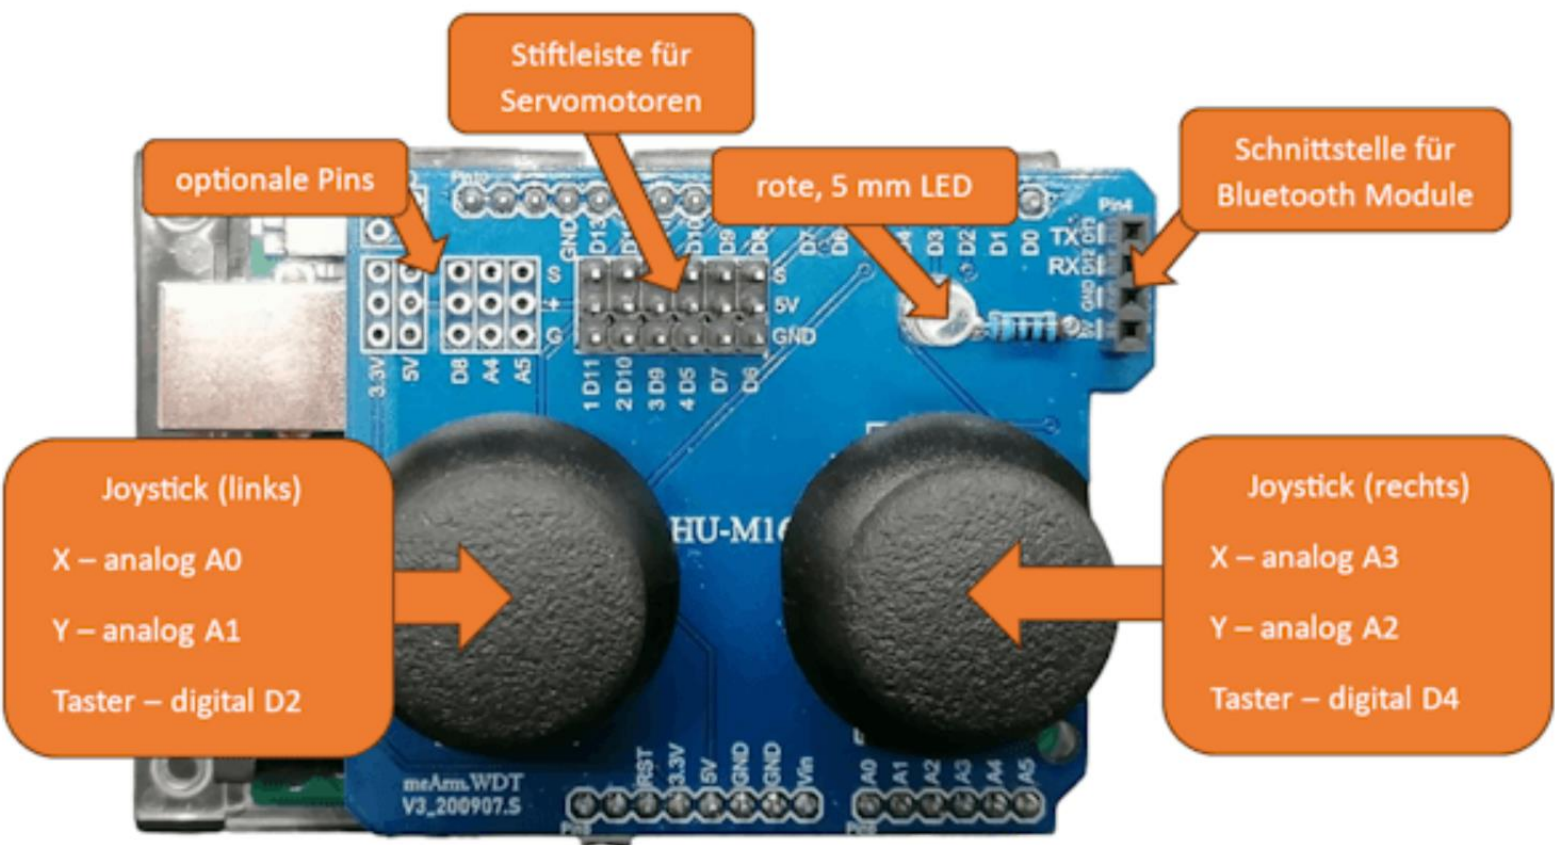

HU-M16	Arduino UNO R3	Raspberry Pi Pico
Joystick (links)		
X	A0	GP26
Y	A1	GP27
Taster	D2	GP2
Joystick (rechts)		
X	A3	
Y	A2	GP28
Taster	D4	GP4
LED	D3	GP3

Control logic:

Joystick 1 X-axis → D5 → Servo 3 (0-180°)

Joystick 1 Y-axis → D9 → servo 2 (0-180°)

Joystick 2 X-axis → D10 → servo 1 (0-180°)

Joystick 2 Y-axis → D11 → servo 0 (0-180°)

Joystick 1 button → D7 → servo 4 (0-90°)

Joystick 2 button → D7 → servo 4 (0-90°)

LED indicator light:

Pin D3 controls the LED status

Initialization phase: Flicker at 500ms intervals

Normal operation stage: Constantly lit