


IRAM 2250 (*)

Transformadores Distribución - Relación 13200 ± 2x2,5% / 400 V/V


Potencia (kVA)	Pérdidas (W)		Ucc (%)	Dimensiones (mm)				Masa (kg)
	Po	Pcc		Largo	Ancho	Alto	Trocha	
*25	160	600	4	1250	750	1250	600	410
40	200	900	4	1300	750	1300	600	490
*63	270	1350	4	1300	750	1300	600	540
80	315	1500	4	1450	750	1300	600	620
*100	350	1750	4	1450	750	1350	600	660
125	420	2100	4	1500	750	1350	600	700
*160	500	2500	4	1600	750	1450	600	840
*200	600	3000	4	1650	850	1450	600	890
*250	700	3500	4	1650	900	1450	700	1040
*315	850	4250	4	1650	900	1500	700	1220
400	1000	5000	4	1700	950	1700	700	1490
*500	1200	6000	4	1700	1050	1700	700	1760
*630	1450	7250	4	1700	1050	1900	800	1960
*800	1750	8750	5	1950	1050	2025	800	2390
*1000	2000	10500	5	2100	1100	2050	800	3080
*1250	2300	13800	5	2200	1250	2150	1000	3540
*1600	2700	17000	6	2400	2200	2100	1000	4130
*2000	3000	21500	6	2500	2500	2200	1000	5060
*2500	3300	24800	6	2700	2500	2300	1200	6110
3000	3750	27000	6	2800	2600	2700	1200	6900

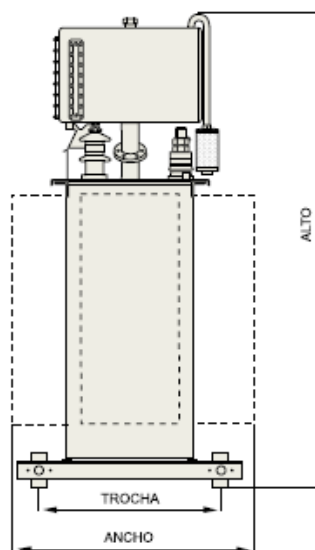

IRAM 2250 (*)

Transformadores Distribución - Relación 33000 ± 2x2,5% / 400 V/V

Potencia (kVA)	Pérdidas (W)		Ucc (%)	Dimensiones (mm)				Masa (kg)
	Po	Pcc		Largo	Ancho	Alto	Trocha	
16	130	480	4	1550	800	1650	600	500
*25	190	650	4	1550	750	1650	600	560
40	290	900	4	1750	800	1650	600	710
*63	320	1500	4	1750	800	1650	600	730
80	330	1600	4	1750	800	1850	600	780
*100	420	1900	4	1750	850	1850	600	930
125	500	2500	4	1850	850	1850	600	1050
*160	600	2800	4	1850	900	1900	600	1150
*200	700	3250	4	1850	900	1900	600	1280
*250	850	4000	4	1850	1050	1950	700	1470
*315	950	4800	4	1850	1050	1950	700	1550
400	1150	5750	4	1950	1050	2200	700	2060
*500	1250	6400	4	1950	1150	2300	700	2350
*630	1500	7600	4	2150	1150	2300	800	2650
*800	1800	9800	5	2200	1200	2300	800	3150
*1000	2200	11700	5	2300	1200	2450	800	3650
*1250	2500	14200	5	2350	1300	2500	1000	4300
*1600	2900	17800	6	2600	2400	2500	1000	5000
*2000	3200	22000	6	2700	2600	2600	1000	5400
*2500	3600	26000	6	3000	2800	2750	1200	6000

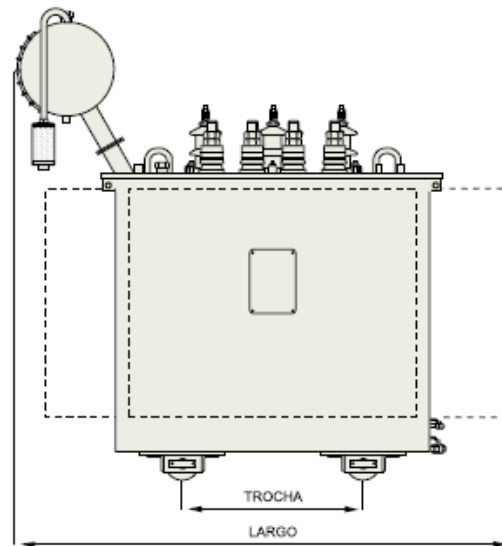


IRAM 2476 (*)

Transformadores Subtransmisión - Relación 33000 +2,5%0;-3x2,5% / 13860 V/V

Potencia (kVA)	Pérdidas (W)		Ucc (%)	Dimensiones (mm)				Masa (kg)
	Po	Pcc		Largo	Ancho	Alto	Trocha	
100	440	2500	5	1700	950	1800	600	1100
*200	720	3600	5	1850	900	2050	850	1270
*250	850	4250	5	1900	950	2050	850	1370
*315	1020	5100	5	1950	1000	2100	850	1600
*400	1160	5800	5	2150	1050	2170	850	1900
*500	1320	6600	5	2150	1050	2250	850	2150
*630	1600	8000	5	2200	1100	2250	850	2500
*800	1900	9500	5	2250	1150	2300	850	2930
*1000	2300	11500	5	2300	1190	2350	1000	3290
*1250	2700	13500	5	2300	2250	2450	1000	4080
*1600	3200	16000	5	2400	2300	2550	1000	4780
*2000	3700	18500	5	2450	2600	2700	1000	5330
2500**	4200	21000	6	2850	2450	2750	1676	6130

** Regulación ± 2 x 2,5%

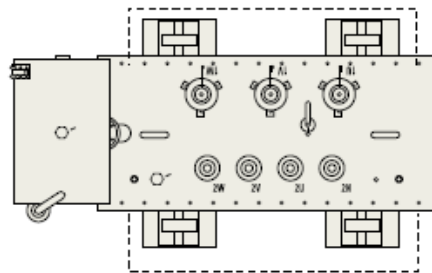

Nota: El tanque de expansión de los transformadores Iram 2476 se colocará en el extremo opuesto al indicado en el esquema.

Nuestros diseños están en constante evolución, por lo que los datos incluidos en esta publicación pueden ser modificados sin previo aviso.