BLINK 2026 · SITE 3.5

BIRDS MURAL

PROJECTOR STUDY

04/27/2026

OVERVIEW

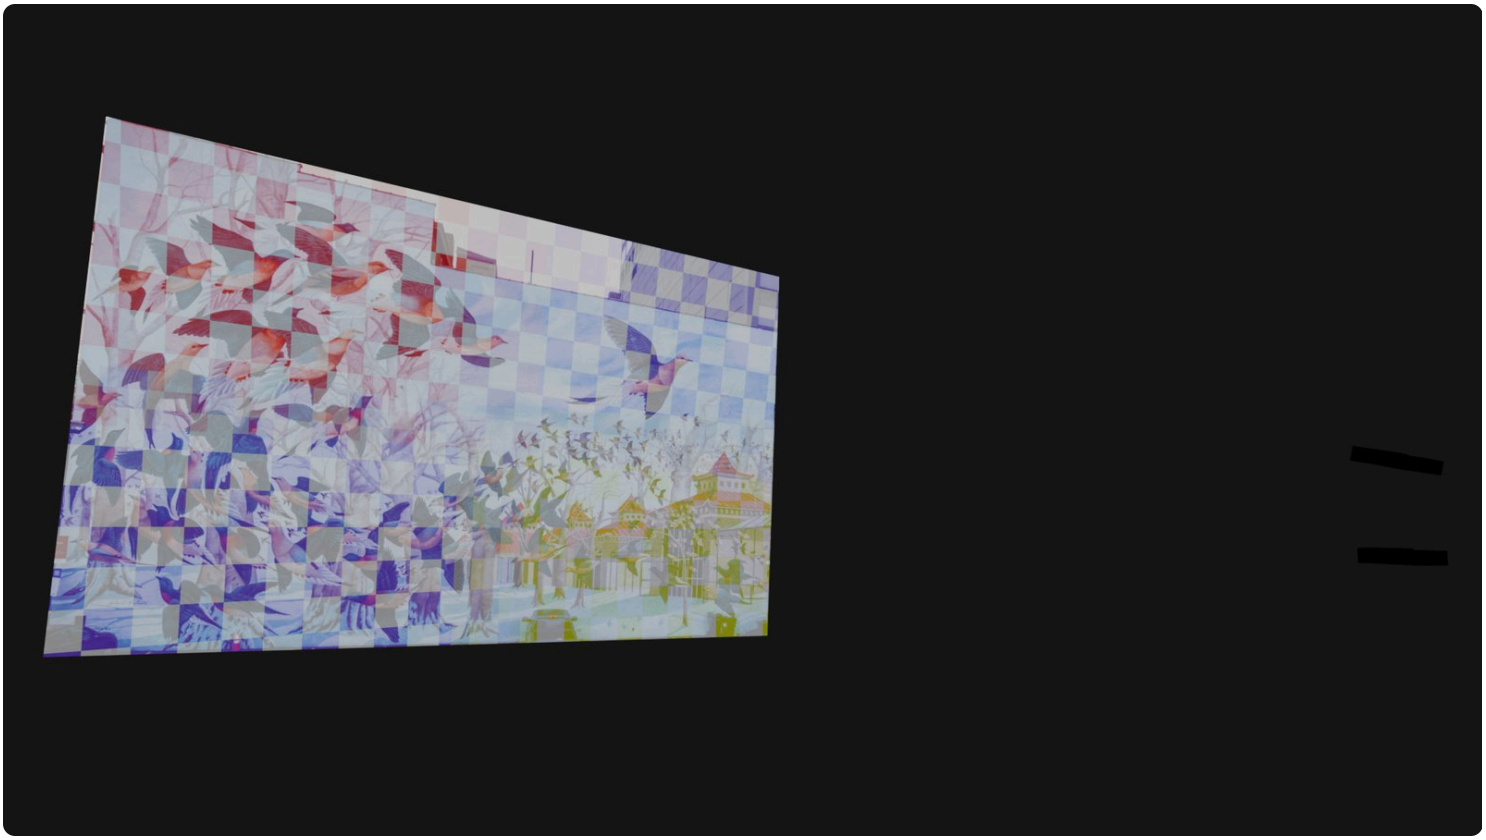

EQUIPMENT

PROJECTOR	LENS	SERVER
×4	×4	VX4
Panasonic HTQ20	ET-D75LE20	

DIMENSIONS

BUILDING	
WIDTH	99'-0"
HEIGHT	60'-6"
FROM GROUND	0'-0"

COVERAGE	
WIDTH	99'-0"
HEIGHT	60'-6"
AVG LUMINANCE	9 fc

RESOLUTION	
RESOLUTION	7320 × 4580 px

ROUGH COVERAGE

OVERLAP ZONES

LUMINANCE HEATMAP

DELIVERY

PROJECTORS

PJ 3.5.1

Panasonic HTQ20 · ET-D75LE20

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
20'-0"

THROW DISTANCE
116'-0"

ANGLE
12°

FOCUS
Top Left

OPTICS

EST. THROW RATIO **2.05 : 1**

1.67 — 2.41

RESOLUTION
3840x2400

LENS SHIFT

VERTICAL **0%**

-55% — 0 — +55%

HORIZONTAL **0%**

-20% — 0 — +20%

PJ 3.5.2
Panasonic HTQ20 · ET-D75LE20

PLACEMENT

ORIENTATION
Landscape

LENS TO GROUND
20'-0"

THROW DISTANCE
112'-0"

ANGLE
12°

FOCUS
Top Right

OPTICS

EST. THROW RATIO 2.05 : 1
1.67 — 2.41

RESOLUTION
3840x2400

LENS SHIFT

VERTICAL 0%
-55% 0 +55%

HORIZONTAL 0%
-20% 0 +20%

PJ 3.5.3
Panasonic HTQ20 · ET-D75LE20

PLACEMENT

LENS TO GROUND
15'-0"

THROW DISTANCE
112'-0"

ANGLE
0°

FOCUS
Bottom Left

OPTICS

EST. THROW RATIO 2.05 : 1
1.67 — 2.41

RESOLUTION
3840x2400

LENS SHIFT

VERTICAL 0%
-55% 0 +55%

HORIZONTAL 0%
-20% 0 +20%

PJ 3.5.4
Panasonic HTQ20 · ET-D75LE20

PLACEMENT

LENS TO GROUND
15'-0"

THROW DISTANCE
112'-0"

ANGLE
0°

FOCUS
Bottom Right

OPTICS

EST. THROW RATIO 2.05 : 1
1.67 — 2.41

RESOLUTION
3840x2400

LENS SHIFT

VERTICAL 0%
-55% 0 +55%

HORIZONTAL 0%
-20% 0 +20%

NOTES

- Includes a 5% "Bleed" on all sides to ensure full coverage of the building surfaces. Please fill content to the full bleed dimensions to avoid any gaps in coverage.
- Projectors are angled outwards to walls edges.

VERSION HISTORY

VERSION 1 04/27/2026 *William Milligan*