BLINK 2026 · SITE 3.2

INTERACTIVE STAGE

PROJECTOR STUDY

04/24/2026

OVERVIEW

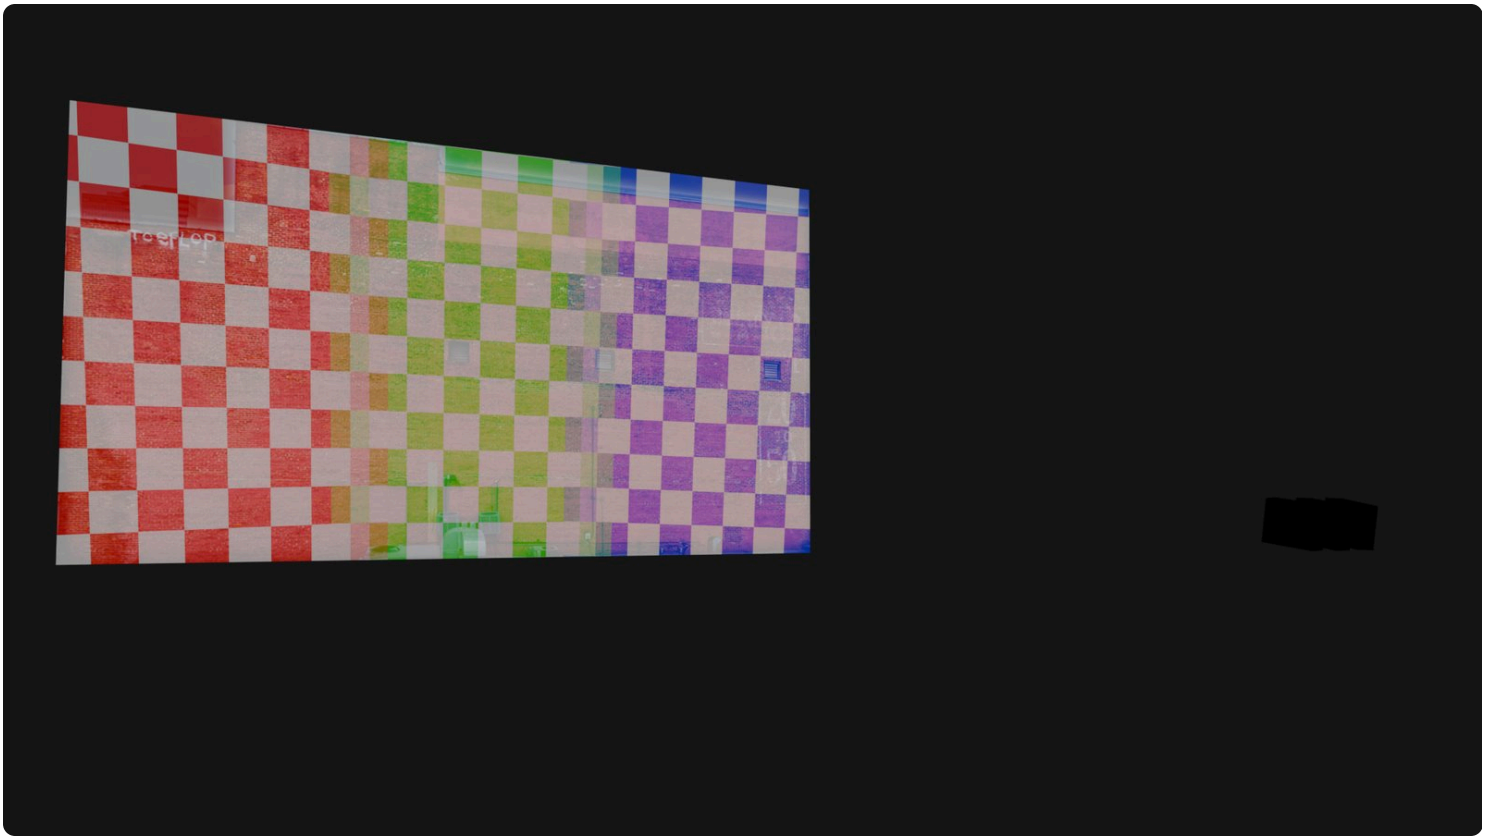

EQUIPMENT

PROJECTOR	LENS	SERVER
×3	×3	GX3
Panasonic RZ21K	ET-D75LE20	

DIMENSIONS

BUILDING	
WIDTH	89'-0"
HEIGHT	48'-0"
FROM GROUND	18'-0"

COVERAGE	
WIDTH	92'-0"
HEIGHT	57'-0"
AVG LUMINANCE	13 fc

RESOLUTION	
RESOLUTION	3120 × 1820 px

ROUGH COVERAGE

OVERLAP ZONES

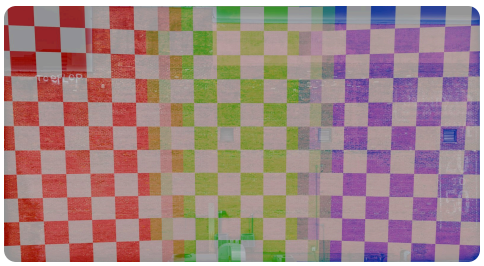

LUMINANCE HEATMAP

DELIVERY

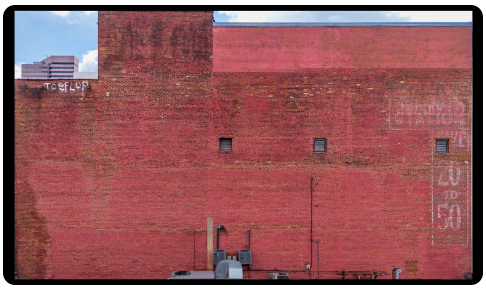

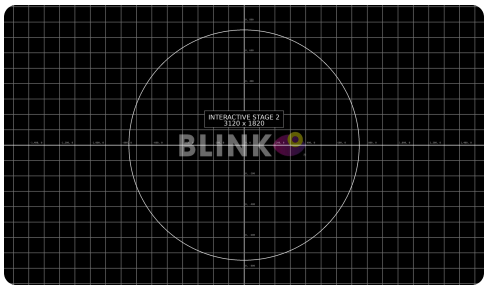

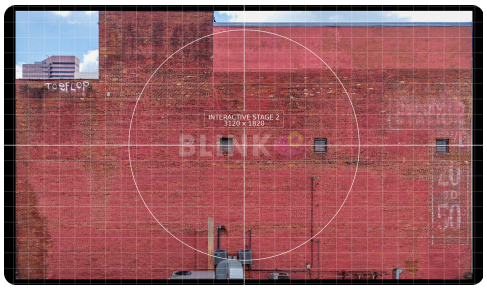

PROJECTORS

3.2.1
Panasonic RZ21K · ET-D75LE20

PLACEMENT

LENS TO GROUND
18'-0"

THROW DISTANCE
126'-0"

ANGLE
6°

FOCUS
Whole Wall

OPTICS

EST. THROW RATIO
1.38 : 1

LENS RANGE
1.67 – 2.41

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL 0%
-55% 0 +55%

HORIZONTAL 0%
-20% 0 +20%

3.2.2
Panasonic RZ21K · ET-D75LE20

PLACEMENT

LENS TO GROUND
18'-0"
THROW DISTANCE
126'-0"
ANGLE
6°
FOCUS
Whole Wall

OPTICS

EST. THROW RATIO
1.38 : 1
LENS RANGE
1.67 – 2.41
RESOLUTION
1920x1200

LENS SHIFT

VERTICAL 0%
-55% 0 +55%

HORIZONTAL 0%
-20% 0 +20%

3.2.3
Panasonic RZ21K · ET-D75LE20

PLACEMENT

LENS TO GROUND
18'-0"
THROW DISTANCE
126'-0"
ANGLE
6°
FOCUS
Whole Wall

OPTICS

EST. THROW RATIO
1.38 : 1
LENS RANGE
1.67 – 2.41
RESOLUTION
1920x1200

LENS SHIFT

VERTICAL 0%
-55% 0 +55%

HORIZONTAL 0%
-20% 0 +20%

NOTES

- Includes a 5% "Bleed" on all sides to ensure full coverage of the building surfaces. Please fill content to the full bleed dimensions to avoid any gaps in coverage.

VERSION HISTORY

VERSION 1 04/24/2026 *Ted Brown*

Initial version